



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T
AMD EPYC 4585PX

SPECrate®2017_fp_base = 174

SPECrate®2017_fp_peak = 175

CPU2017 License: 5416


Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Mar-2025

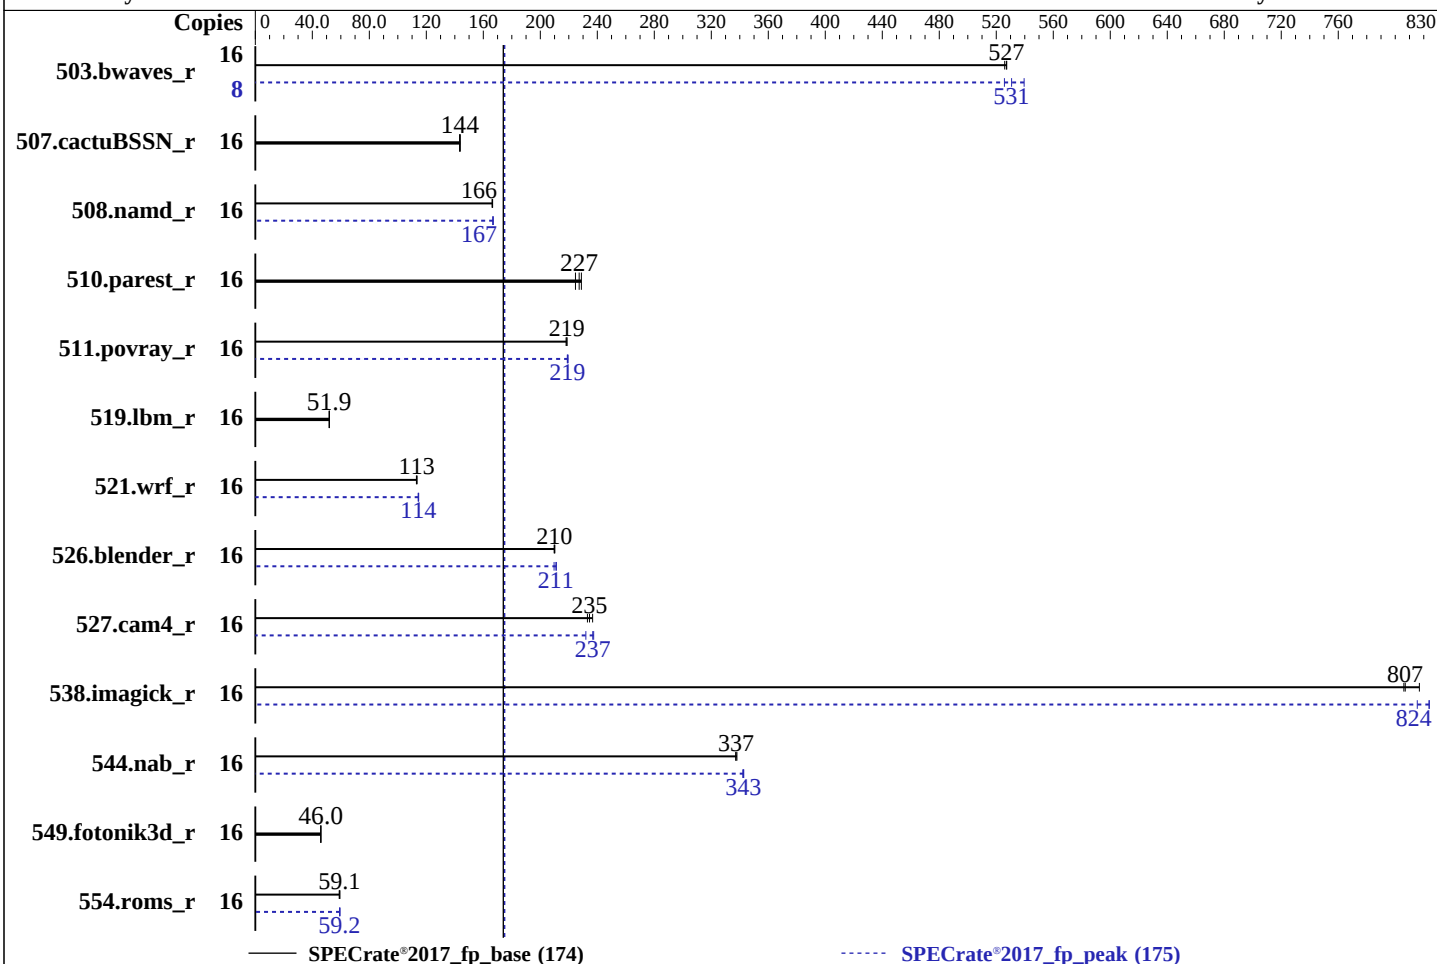

Hardware

CPU Name: AMD EPYC 4585PX
Max MHz: 5700
Nominal: 4300
Enabled: 16 cores, 1 chip
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 128 MB I+D on chip per chip, 96 MB shared / 8 cores + 32 MB shared / 8 cores
Other: None
Memory: 64 GB (2 x 32 GB 2Rx8 PC5-5600B-R)
Storage: 1 x 930 GB NVMe M.2
Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.2 LTS
kernel version 6.8.0-57-generic
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Version 21.06 released Mar-2025
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T
AMD EPYC 4585PX

SPECrate®2017_fp_base = 174

SPECrate®2017_fp_peak = 175

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Mar-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	16	<u>304</u>	<u>527</u>	304	527	305	526	8	149	540	153	526	<u>151</u>	<u>531</u>
507.cactuBSSN_r	16	141	144	141	143	<u>141</u>	<u>144</u>	16	141	144	141	143	<u>141</u>	<u>144</u>
508.namd_r	16	91.5	166	<u>91.3</u>	<u>166</u>	91.3	167	16	91.1	167	91.2	167	<u>91.1</u>	<u>167</u>
510.parest_r	16	<u>184</u>	<u>227</u>	186	225	183	229	16	<u>184</u>	<u>227</u>	186	225	183	229
511.povray_r	16	<u>171</u>	<u>219</u>	171	219	171	218	16	171	219	<u>171</u>	<u>219</u>	170	220
519.lbm_r	16	325	51.9	325	51.9	<u>325</u>	<u>51.9</u>	16	325	51.9	325	51.9	<u>325</u>	<u>51.9</u>
521.wrf_r	16	317	113	316	113	<u>316</u>	<u>113</u>	16	313	115	314	114	<u>313</u>	<u>114</u>
526.blender_r	16	<u>116</u>	<u>210</u>	116	210	116	210	16	115	211	<u>116</u>	<u>211</u>	116	210
527.cam4_r	16	<u>119</u>	<u>235</u>	118	237	120	233	16	<u>118</u>	<u>237</u>	118	237	121	232
538.imagick_r	16	49.4	806	<u>49.3</u>	<u>807</u>	48.7	817	16	48.3	824	<u>48.3</u>	<u>824</u>	48.8	815
544.nab_r	16	79.9	337	<u>79.8</u>	<u>337</u>	79.7	338	16	78.7	342	78.6	343	<u>78.6</u>	<u>343</u>
549.fotonik3d_r	16	1357	45.9	<u>1356</u>	<u>46.0</u>	1356	46.0	16	1357	45.9	<u>1356</u>	<u>46.0</u>	1356	46.0
554.roms_r	16	<u>430</u>	<u>59.1</u>	432	58.9	428	59.4	16	<u>430</u>	<u>59.2</u>	430	59.1	428	59.4

SPECrate®2017_fp_base = 174

SPECrate®2017_fp_peak = 175

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T
AMD EPYC 4585PX

SPECrate®2017_fp_base = 174

SPECrate®2017_fp_peak = 175

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Mar-2025

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/amd/speccpu/amd_rate_aocc500_znver5_A_lib/lib:/home/amd/speccpu/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

Platform Notes

BIOS setting:

SMT : Disabled

SoC/Uncore OC Mode : Enabled

Sysinfo program /home/amd/speccpu/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on ryzen-grado-3 Fri Apr 18 03:17:20 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.6)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
-

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T
AMD EPYC 4585PX

SPECrate®2017_fp_base = 174

SPECrate®2017_fp_peak = 175

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Mar-2025

Platform Notes (Continued)

1. uname -a

```
Linux ryzen-grado-3 6.8.0-57-generic #59-Ubuntu SMP PREEMPT_DYNAMIC Sat Mar 15 17:40:59 UTC 2025 x86_64
x86_64 x86_64 GNU/Linux
```

2. w

```
03:17:20 up 3:05, 2 users, load average: 10.11, 14.19, 14.90
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
amd                10.252.54.9    02:28    3:05m  0.00s  ?      sshd: amd [priv]
```

3. Username

```
From environment variable $USER: root
From the command 'logname': amd
```

4. ulimit -a

```
time(seconds)      unlimited
file(blocks)        unlimited
data(kbytes)         unlimited
stack(kbytes)        unlimited
coredump(blocks)    0
memory(kbytes)       unlimited
locked memory(kbytes) 2097152
process             247264
nofiles             1024
vmemory(kbytes)      unlimited
locks               unlimited
rtprio              0
```

5. sysinfo process ancestry

```
/sbin/init
tmux
-bash
sudo -E PYTHONPATH=$SPEC/amd_rate_aocc500_znver5_A_lib/shared/cpuid ./run_amd_rate_aocc500_znver5_A1.py
sudo -E PYTHONPATH=$SPEC/amd_rate_aocc500_znver5_A_lib/shared/cpuid ./run_amd_rate_aocc500_znver5_A1.py
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/amd/speccpu
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 4585PX 16-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 68
stepping        : 0
microcode       : 0xb404023
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 16
siblings        : 16
1 physical ids (chips)
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T
AMD EPYC 4585PX

SPECrate®2017_fp_base = 174

SPECrate®2017_fp_peak = 175

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Mar-2025

Platform Notes (Continued)

16 processors (hardware threads)

physical id 0: core ids 0-15

physical id 0: apicids 0-15

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	48 bits physical, 48 bits virtual
Byte Order:	Little Endian
CPU(s):	16
On-line CPU(s) list:	0-15
Vendor ID:	AuthenticAMD
BIOS Vendor ID:	Advanced Micro Devices, Inc.
Model name:	AMD EPYC 4585PX 16-Core Processor
BIOS Model name:	AMD EPYC 4585PX 16-Core Processor
BIOS CPU family:	107
CPU family:	26
Model:	68
Thread(s) per core:	1
Core(s) per socket:	16
Socket(s):	1
Stepping:	0
CPU(s) scaling MHz:	44%
CPU max MHz:	5752.0000
CPU min MHz:	600.0000
BogoMIPS:	8583.31
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpxt perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd cppc amd_ibpb_ret arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect flush_l1d
Virtualization:	AMD-V
L1d cache:	768 KiB (16 instances)
L1i cache:	512 KiB (16 instances)
L2 cache:	16 MiB (16 instances)
L3 cache:	128 MiB (2 instances)
NUMA node(s):	1
NUMA node0 CPU(s):	0-15
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T
AMD EPYC 4585PX

SPECrate®2017_fp_base = 174

SPECrate®2017_fp_peak = 175

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Mar-2025

Platform Notes (Continued)

Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	1M	16M	16	Unified	2	1024	1	64
L3	96M	128M	16	Unified	3	98304	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)
node 0 cpus: 0-15
node 0 size: 61890 MB
node 0 free: 61148 MB
node distances:
node 0
0: 10

9. /proc/meminfo

MemTotal: 63375936 kB

10. who -r

run-level 5 Apr 18 00:12

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.6)

Default Target	Status
graphical	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	apparmor apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lm-sensors lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage ufw vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell iscsid nftables rsync serial-getty@ ssh sysstat systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T
AMD EPYC 4585PX

SPECrate®2017_fp_base = 174

SPECrate®2017_fp_peak = 175

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Mar-2025

Platform Notes (Continued)

indirect systemd-time-wait-sync tuned upower
masked systemd-sysupdate systemd-sysupdate-reboot uidd
cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/vmlinuz-6.8.0-57-generic
root=/dev/mapper/ubuntu--vg-ubuntu--lv
ro

14. cpupower frequency-info
analyzing CPU 5:
current policy: frequency should be within 600 MHz and 5.75 GHz.
The governor "powersave" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. tuned-adm active
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: balanced

16. sysctl
kernel.numa_balancing 0
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1

17. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T
AMD EPYC 4585PX

SPECrate®2017_fp_base = 174

SPECrate®2017_fp_peak = 175

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Mar-2025

Platform Notes (Continued)

max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release

From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.2 LTS

20. Disk information

SPEC is set to: /home/amd/speccpu

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv	ext4	98G	35G	59G	38%	/

21. /sys/devices/virtual/dmi/id

Vendor: ASRockRack
Product: 1U4LW-B650/2L2T

22. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x Micron Technology MTC20C2085S1EC56BD1 NC 32 GB 2 rank 5600

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 21.06
BIOS Date: 03/17/2025
BIOS Revision: 5.35

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T
AMD EPYC 4585PX

SPECrate®2017_fp_base = 174

SPECrate®2017_fp_peak = 175

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Mar-2025

Compiler Version Notes (Continued)

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T
AMD EPYC 4585PX

SPECrate®2017_fp_base = 174

SPECrate®2017_fp_peak = 175

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Mar-2025

Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T
AMD EPYC 4585PX

SPECrate®2017_fp_base = 174

SPECrate®2017_fp_peak = 175

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Mar-2025

Base Optimization Flags (Continued)

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc  
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang  
-ldl
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T
AMD EPYC 4585PX

SPECrate®2017_fp_base = 174

SPECrate®2017_fp_peak = 175

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Mar-2025

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdalloc -lflang -ldl
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T
AMD EPYC 4585PX

SPECrate®2017_fp_base = 174

SPECrate®2017_fp_peak = 175

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Mar-2025

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

C++ benchmarks:

508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T
AMD EPYC 4585PX

SPECrate®2017_fp_base = 174

SPECrate®2017_fp_peak = 175

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Mar-2025

Peak Optimization Flags (Continued)

508.namd_r (continued):

```
-Wl, -mllvm -Wl, -reduce-array-computations=3  
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

510.parest_r: basepeak = yes

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-Mrecursive -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm  
-lamdalloc -ldl -lflang
```

549.fotonik3d_r: basepeak = yes

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc  
-ldl -lflang
```

```
527.cam4_r: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3  
-Wl, -mllvm -Wl, -enable-X86-prefetching -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc  
-ldl -lflang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T
AMD EPYC 4585PX

SPECrate®2017_fp_base = 174

SPECrate®2017_fp_peak = 175

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Mar-2025

Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

```
511.povray_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc -ldl
```

```
526.blender_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl
```

Benchmarks using Fortran, C, and C++:

```
507.cactuBSSN_r: basepeak = yes
```

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T
AMD EPYC 4585PX

SPECrate®2017_fp_base = 174

SPECrate®2017_fp_peak = 175

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Mar-2025

Peak Other Flags (Continued)

Benchmarks using both C and C++:
-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/ASRockRack-platform_AMD_setting_v1.0.2025-05-14.html

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/ASRockRack-platform_AMD_setting_v1.0.2025-05-14.xml

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-04-17 23:17:19-0400.

Report generated on 2025-05-14 11:21:57 by CPU2017 PDF formatter v6716.

Originally published on 2025-05-14.