



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX1330 M6,  
Intel Xeon 6333P, 3.1 GHz

SPECrate®2017\_fp\_base = 89.0

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

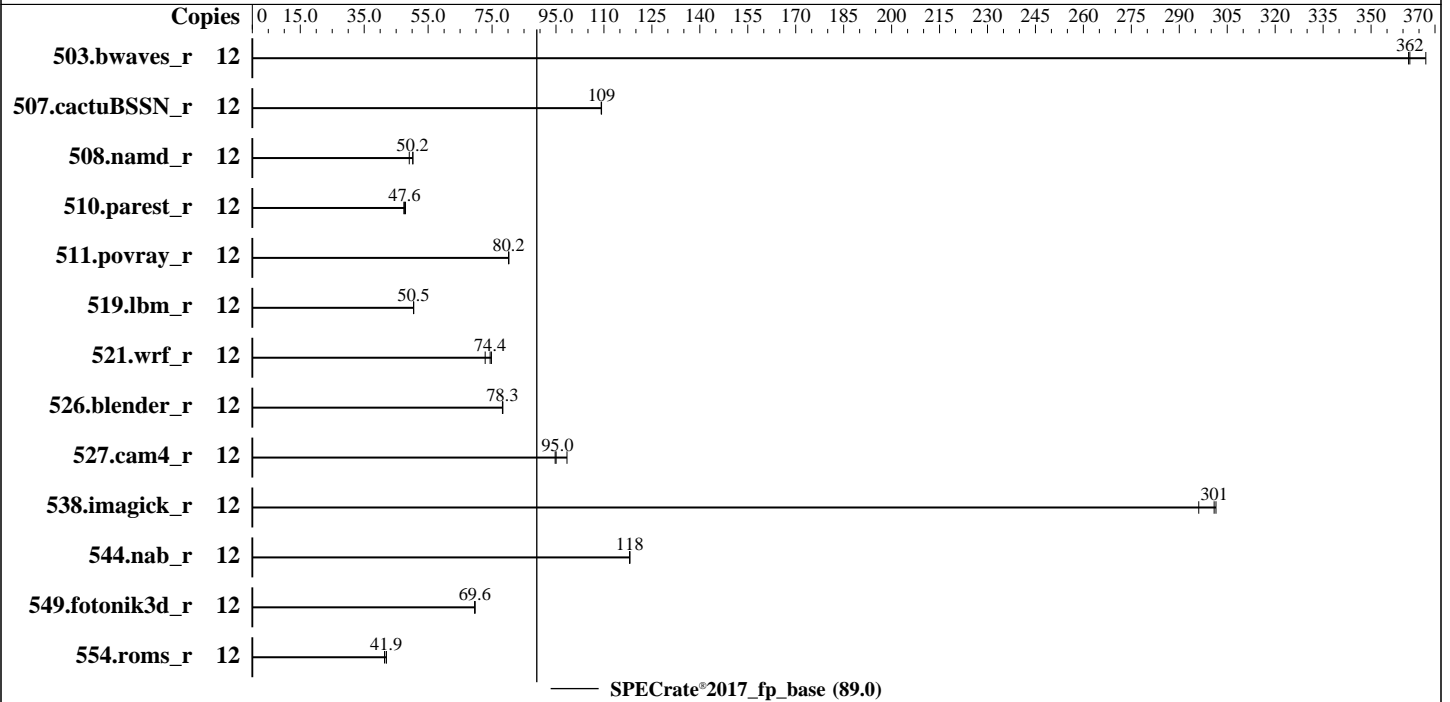

### Hardware

CPU Name: Intel Xeon 6333P  
 Max MHz: 4700  
 Nominal: 3100  
 Enabled: 6 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 18 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (2 x 32 GB 2Rx8 PC5-4800B-E, running at 4400)  
 Storage: 1 x SATA M.2 SSD, 960 GB  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6 6.4.0-150600.21-default  
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Fujitsu BIOS Version V5.0.0.32 R2.1.0 for D4133-A1x. Released Apr-2025  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX1330 M6,  
Intel Xeon 6333P, 3.1 GHz

SPECrate®2017\_fp\_base = 89.0

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Mar-2025  
Hardware Availability: Apr-2025  
Software Availability: Jun-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	12	328	367	333	362	<u>332</u>	<u>362</u>							
507.cactuBSSN_r	12	<u>139</u>	<u>109</u>	139	109	139	109							
508.namd_r	12	<u>227</u>	<u>50.2</u>	227	50.3	232	49.1							
510.parest_r	12	<u>659</u>	<u>47.6</u>	662	47.4	655	47.9							
511.povray_r	12	<u>349</u>	<u>80.2</u>	349	80.2	349	80.2							
519.lbm_r	12	251	50.4	251	50.5	<u>251</u>	<u>50.5</u>							
521.wrf_r	12	359	74.8	369	72.8	<u>361</u>	<u>74.4</u>							
526.blender_r	12	<u>233</u>	<u>78.3</u>	234	78.2	233	78.4							
527.cam4_r	12	213	98.4	<u>221</u>	<u>95.0</u>	222	94.7							
538.imagick_r	12	101	296	<u>99.2</u>	<u>301</u>	99.0	301							
544.nab_r	12	171	118	171	118	<u>171</u>	<u>118</u>							
549.fotonik3d_r	12	671	69.6	<u>672</u>	<u>69.6</u>	672	69.6							
554.roms_r	12	<u>455</u>	<u>41.9</u>	461	41.4	455	41.9							

SPECrate®2017\_fp\_base = 89.0

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
echo 20000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/benchmark/speccpu-24.1/lib/intel64:/home/benchmark/speccpu-24.1/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX1330 M6,  
Intel Xeon 6333P, 3.1 GHz

SPECrate®2017\_fp\_base = 89.0

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Mar-2025  
**Hardware Availability:** Apr-2025  
**Software Availability:** Jun-2024

## General Notes (Continued)

is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:  
Fan Control = Full  
Total Memory Encryption = Disabled  
DMI Max Link Speed = Gen2  
REFRESH\_2X\_MODE = 2- Enabled HOT only

Sysinfo program /home/benchmark/speccpu-24.1/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Fri Mar 28 00:01:20 2025

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
00:01:20 up 2 min, 1 user, load average: 0.11, 0.10, 0.04
USER  TTY  FROM          LOGIN@  IDLE   JCPU   PCPU   WHAT
root  tty1  -             00:00   7.00s  0.99s  0.05s  -bash
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX1330 M6,  
Intel Xeon 6333P, 3.1 GHz

SPECrate®2017\_fp\_base = 89.0

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Mar-2025  
**Hardware Availability:** Apr-2025  
**Software Availability:** Jun-2024

## Platform Notes (Continued)

### 3. Username

From environment variable \$USER: root

### 4. ulimit -a

```

core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 254382
max locked memory      (kbytes, -l) 8192
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 254382
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=12 -c
ic2024.1-lin-core-avx2-rate-20240308.cfg --define smt-on --define cores=6 --define physicallogical
--define no-numa --tune base -o all --define drop_caches fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=12 --configfile
ic2024.1-lin-core-avx2-rate-20240308.cfg --define smt-on --define cores=6 --define physicallogical
--define no-numa --tune base --output_format all --define drop_caches --nopower --runmode rate --tune base
--size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/benchmark/speccpu-24.1

```

### 6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) 6333P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 183
stepping       : 1
microcode      : 0x12c
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores      : 6
siblings       : 12
1 physical ids (chips)
12 processors (hardware threads)
physical id 0: core ids 0-5
physical id 0: apicids 0-11

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX1330 M6,  
Intel Xeon 6333P, 3.1 GHz

SPECrate®2017\_fp\_base = 89.0

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Mar-2025  
**Hardware Availability:** Apr-2025  
**Software Availability:** Jun-2024

## Platform Notes (Continued)

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               46 bits physical, 48 bits virtual
Byte Order:                  Little Endian
CPU(s):                      12
On-line CPU(s) list:        0-11
Vendor ID:                   GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                   Intel(R) Xeon(R) 6333P
BIOS Model name:             Intel(R) Xeon(R) 6333P   CPU @ 4.5GHz
BIOS CPU family:             179
CPU family:                   6
Model:                       183
Thread(s) per core:         2
Core(s) per socket:         6
Socket(s):                   1
Stepping:                    1
CPU(s) scaling MHz:         27%
CPU max MHz:                 5200.0000
CPU min MHz:                 800.0000
BogoMIPS:                    6220.80
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                             pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                             nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                             pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                             xtpr pdcm sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                             xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb ssbd
                             ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad
                             fsgsbase tsc_adjust bml avx2 smep bmi2 erms invpcid rdseed adx smap
                             clflushopt clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves
                             split_lock_detect user_shstk avx_vnni dtherm ida arat pln pts hwp
                             hwp_notify hwp_act_window hwp_epp hwp_pkg_req hfi vnmi umip pku ospke
                             waitpkg gfni vaes vpclmulqdq tme rdpid movdiri movdir64b fsrm
                             md_clear serialize pconfig arch_lbr ibt flush_l1d arch_capabilities
Virtualization:              VT-x
L1d cache:                   288 KiB (6 instances)
L1i cache:                   192 KiB (6 instances)
L2 cache:                    12 MiB (6 instances)
L3 cache:                    18 MiB (1 instance)
NUMA node(s):                1
NUMA node0 CPU(s):          0-11
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:          Not affected
Vulnerability Mds:           Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:     Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:    Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:    Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                             PBRSE-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds:         Not affected
Vulnerability Tsx async abort: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX1330 M6,  
Intel Xeon 6333P, 3.1 GHz

SPECrate®2017\_fp\_base = 89.0

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Mar-2025  
**Hardware Availability:** Apr-2025  
**Software Availability:** Jun-2024

### Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	288K	12	Data	1	64	1	64
L1i	32K	192K	8	Instruction	1	64	1	64
L2	2M	12M	16	Unified	2	2048	1	64
L3	18M	18M	9	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0-11
node 0 size: 63621 MB
node 0 free: 63060 MB
node distances:
node 0
0: 10

```

9. /proc/meminfo

MemTotal: 65148560 kB

10. who -r

run-level 3 Mar 27 23:59

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled apparmor auditd cron getty@ irqbalance issue-generator kbdsettings lvm2-monitor postfix
purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4
wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled YaST2-Firstboot YaST2-Second-Stage autofs autoyast-initscripts blk-availability
boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed
debug-shell display-manager ebttables exchange-bmc-os-info firewalld fsidd gpm grub2-once
haveged ipmi ipmievd issue-add-ssh-keys kdump kdump-early kdump-notify kexec-load klog
lunmask man-db-create multipathd nfs nfs-blkmap nscd rpcbind rpmconfigcheck rsyncd rsyslog
sep5 serial-getty@ smartd smartd_generate_opts snmpd snmptrapd
systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd vncserver@
indirect systemd-userdbd wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=69cd5337-d082-4cee-8e02-ec4054c30a5a
splash=silent
resume=/dev/disk/by-uuid/a5855c9d-a4a0-4b74-baec-bd075bde416b
quiet
security=apparmor
crashkernel=347M,high
crashkernel=72M,low
mitigations=auto

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX1330 M6,  
Intel Xeon 6333P, 3.1 GHz

SPECrate®2017\_fp\_base = 89.0

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Mar-2025

**Hardware Availability:** Apr-2025

**Software Availability:** Jun-2024

## Platform Notes (Continued)

### 14. cpupower frequency-info

analyzing CPU 7:

current policy: frequency should be within 800 MHz and 5.20 GHz.

The governor "powersave" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

### 15. sysctl

```

kernel.numa_balancing          0
kernel.randomize_va_space     2
vm.compaction_proactiveness   20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                   60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

### 16. /sys/kernel/mm/transparent\_hugepage

```

defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

### 17. /sys/kernel/mm/transparent\_hugepage/khugepaged

```

alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000

```

### 18. OS release

```

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

### 19. Disk information

SPEC is set to: /home/benchmark/speccpu-24.1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda5	xfs	751G	59G	693G	8%	/home

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX1330 M6,  
Intel Xeon 6333P, 3.1 GHz

SPECrate®2017\_fp\_base = 89.0

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Mar-2025  
**Hardware Availability:** Apr-2025  
**Software Availability:** Jun-2024

## Platform Notes (Continued)

-----  
20. /sys/devices/virtual/dmi/id  
Vendor: FUJITSU  
Product: PRIMERGY RX1330 M6  
Product Family: SERVER  
Serial: xxxxxxxxxxxx  
-----

21. dmidecode  
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
2x Samsung M324R4GA3BB0-CQKOD 32 GB 2 rank 4800, configured at 4400  
-----

22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: FUJITSU // American Megatrends International, LLC.  
BIOS Version: V5.0.0.32 R2.1.0 for D4133-Alx  
BIOS Date: 02/26/2025  
BIOS Revision: 2.1  
-----

## Compiler Version Notes

=====  
C | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base) 510.parest\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX1330 M6,  
Intel Xeon 6333P, 3.1 GHz

SPECrate®2017\_fp\_base = 89.0

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Mar-2025  
**Hardware Availability:** Apr-2025  
**Software Availability:** Jun-2024

## Compiler Version Notes (Continued)

-----  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

-----  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx

Benchmarks using both Fortran and C:  
ifx icx

Benchmarks using both C and C++:  
icpx icx

Benchmarks using Fortran, C, and C++:  
icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX1330 M6,  
Intel Xeon 6333P, 3.1 GHz

SPECrate®2017\_fp\_base = 89.0

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## Base Portability Flags (Continued)

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

### C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

### C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

### Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

### Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

### Benchmarks using both C and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

### Benchmarks using Fortran, C, and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX1330 M6,  
Intel Xeon 6333P, 3.1 GHz

SPECrate®2017\_fp\_base = 89.0

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Mar-2025

**Hardware Availability:** Apr-2025

**Software Availability:** Jun-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-RPL-R-RevA.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-RPL-R-RevA.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-27 11:01:20-0400.

Report generated on 2025-05-08 09:59:48 by CPU2017 PDF formatter v6716.

Originally published on 2025-05-06.