



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 1750

meta brain NF5280G8 (Intel Xeon 6787P)

SPECrate®2017_fp_peak = 1820

CPU2017 License: 3358


Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

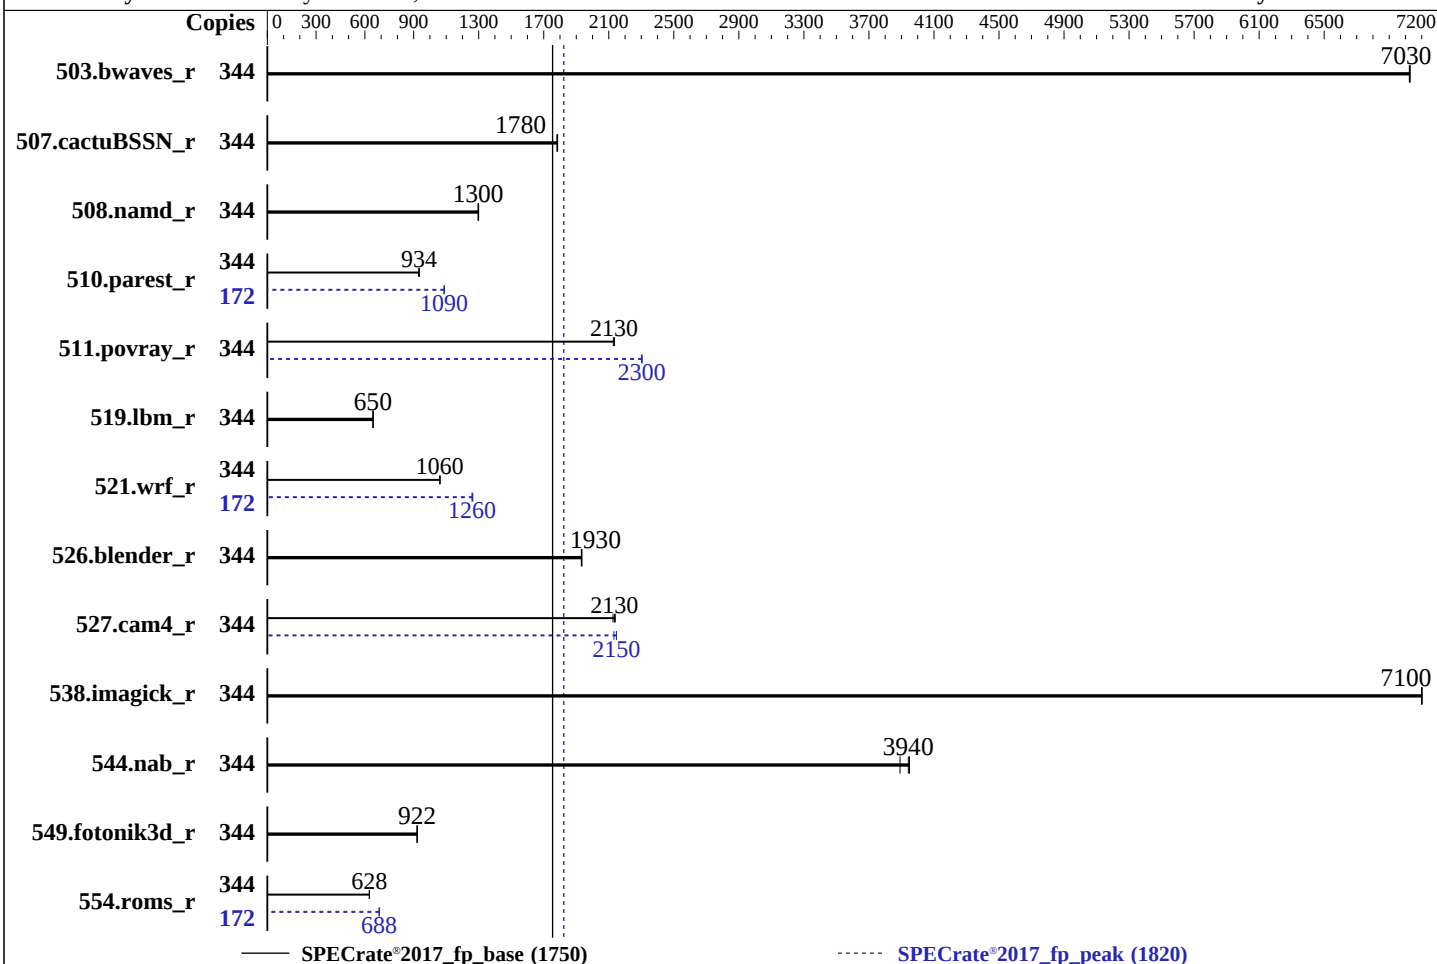

Hardware

CPU Name: Intel Xeon 6787P
Max MHz: 3800
Nominal: 2000
Enabled: 172 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 336 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-88/64B-H, running at 8000)
Storage: 1 x 960 GB SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 02.03.00 released Feb-2025
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 1750

meta brain NF5280G8 (Intel Xeon 6787P)

SPECrate®2017_fp_peak = 1820

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	344	491	7030	<u>491</u>	<u>7030</u>	491	7020	344	491	7030	<u>491</u>	<u>7030</u>	491	7020
507.cactuBSSN_r	344	<u>244</u>	<u>1780</u>	244	1780	244	1790	344	<u>244</u>	<u>1780</u>	244	1780	244	1790
508.namd_r	344	<u>252</u>	<u>1300</u>	251	1300	252	1300	344	<u>252</u>	<u>1300</u>	251	1300	252	1300
510.parest_r	344	966	931	<u>964</u>	<u>934</u>	963	935	172	413	1090	<u>414</u>	<u>1090</u>	414	1090
511.povray_r	344	376	2140	377	2130	<u>377</u>	<u>2130</u>	344	349	2300	<u>349</u>	<u>2300</u>	349	2300
519.lbm_r	344	558	650	558	650	<u>558</u>	<u>650</u>	344	558	650	558	650	<u>558</u>	<u>650</u>
521.wrf_r	344	726	1060	726	1060	<u>726</u>	<u>1060</u>	172	306	1260	<u>306</u>	<u>1260</u>	305	1260
526.blender_r	344	<u>271</u>	<u>1930</u>	271	1930	271	1930	344	<u>271</u>	<u>1930</u>	271	1930	271	1930
527.cam4_r	344	283	2130	<u>282</u>	<u>2130</u>	281	2140	344	280	2150	<u>280</u>	<u>2150</u>	282	2130
538.imagick_r	344	<u>120</u>	<u>7100</u>	120	7100	121	7100	344	<u>120</u>	<u>7100</u>	120	7100	121	7100
544.nab_r	344	149	3890	147	3950	<u>147</u>	<u>3940</u>	344	149	3890	147	3950	<u>147</u>	<u>3940</u>
549.fotonik3d_r	344	1452	923	1457	920	<u>1454</u>	<u>922</u>	344	1452	923	1457	920	<u>1454</u>	<u>922</u>
554.roms_r	344	870	628	872	627	<u>871</u>	<u>628</u>	172	397	688	<u>397</u>	<u>688</u>	397	689

SPECrate®2017_fp_base = 1750

SPECrate®2017_fp_peak = 1820

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 1750

meta brain NF5280G8 (Intel Xeon 6787P)

SPECrate®2017_fp_peak = 1820

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

ENERGY_PERF_BIAS_CFG mode set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

SNC set to SNC2

Sysinfo program /home/CPU2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Tue Apr 1 05:56:53 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

-
1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
-

-
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
-

2. w
05:56:53 up 6:59, 1 user, load average: 227.20, 313.54, 328.51

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 1750

meta brain NF5280G8 (Intel Xeon 6787P)

SPECrate®2017_fp_peak = 1820

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```
USER      TTY      FROM          LOGIN@  IDLE   JCPU   PCPU WHAT
root      tty1      -             31Dec24 5:56m 1.36s  0.05s sh
reportable-ic2024.1-lin-sapphirerapids-rate-smt-on-20240308.sh
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4123859
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4123859
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
login -- root
-bash
sh reportable-ic2024.1-lin-sapphirerapids-rate-smt-on-20240308.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=344 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=172 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=344 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=172 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/temlogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6787P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 173
stepping        : 1
microcode       : 0x1000341
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores       : 86
siblings        : 172
2 physical ids (chips)
344 processors (hardware threads)
physical id 0:  core ids 0-42,64-106
physical id 1:  core ids 0-42,64-106
physical id 0:  apicids 0-85,128-213
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 1750

meta brain NF5280G8 (Intel Xeon 6787P)

SPECrate®2017_fp_peak = 1820

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

Platform Notes (Continued)

physical id 1: apicids 256-341,384-469

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	344
On-line CPU(s) list:	0-343
Vendor ID:	GenuineIntel
BIOS Vendor ID:	Intel(R) Corporation
Model name:	Intel(R) Xeon(R) 6787P
BIOS Model name:	Intel(R) Xeon(R) 6787P CPU @ 2.0GHz
BIOS CPU family:	179
CPU family:	6
Model:	173
Thread(s) per core:	2
Core(s) per socket:	86
Socket(s):	2
Stepping:	1
Frequency boost:	enabled
CPU(s) scaling MHz:	42%
CPU max MHz:	2001.0000
CPU min MHz:	800.0000
BogoMIPS:	4000.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
L1d cache:	8.1 MiB (172 instances)
L1i cache:	10.8 MiB (172 instances)
L2 cache:	344 MiB (172 instances)
L3 cache:	672 MiB (2 instances)
NUMA node(s):	4
NUMA node0 CPU(s):	0-42,172-214
NUMA node1 CPU(s):	43-85,215-257
NUMA node2 CPU(s):	86-128,258-300
NUMA node3 CPU(s):	129-171,301-343
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 1750

meta brain NF5280G8 (Intel Xeon 6787P)

SPECrate®2017_fp_peak = 1820

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

Platform Notes (Continued)

Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	8.1M	12	Data	1	64	1	64
L1i	64K	10.8M	16	Instruction	1	64	1	64
L2	2M	344M	16	Unified	2	2048	1	64
L3	336M	672M	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0-42,172-214
node 0 size: 257404 MB
node 0 free: 220460 MB
node 1 cpus: 43-85,215-257
node 1 size: 258025 MB
node 1 free: 224601 MB
node 2 cpus: 86-128,258-300
node 2 size: 257986 MB
node 2 free: 224851 MB
node 3 cpus: 129-171,301-343
node 3 size: 257573 MB
node 3 free: 224207 MB
node distances:
node 0 1 2 3
0: 10 12 21 21
1: 12 10 21 21
2: 21 21 10 12
3: 21 21 12 10

9. /proc/meminfo

MemTotal: 1055734088 kB

10. who -r

run-level 3 Dec 31 19:13

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 1750

meta brain NF5280G8 (Intel Xeon 6787P)

SPECrate®2017_fp_peak = 1820

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

Platform Notes (Continued)

enabled apparmor auditd cron getty@ irqbalance issue-generator kbdsettings kdump kdump-early
kdump-notify nvme-fc-boot-connections nvme-fc-autoconnect postfix purge-kernels rollback
systemd-pstore
enabled-runtime systemd-remount-fs
disabled boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
exchange-bmc-os-info fsidd grub2-once haveged ipmiev-d issue-add-ssh-keys kexec-load
lunmask nfs nfs-blkmap rpcbind rpmconfigcheck serial-getty@ systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
systemd-timesyncd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
indirect systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=6394587f-ed63-4c08-bf95-cf0e1de4a763
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=371M,high
crashkernel=72M,low

14. cpupower frequency-info

analyzing CPU 99:
current policy: frequency should be within 800 MHz and 2.00 GHz.
The governor "ondemand" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

16. /sys/kernel/mm/transparent_hugepage

defrag	always defer defer+madvice [madvice] never
enabled	[always] madvice never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 1750

meta brain NF5280G8 (Intel Xeon 6787P)

SPECrate®2017_fp_peak = 1820

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs    60000
defrag                    1
max_ptes_none            511
max_ptes_shared          256
max_ptes_swap            64
pages_to_scan            4096
scan_sleep_millisecs     10000
-----
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
-----
```

```
-----
19. Disk information
SPEC is set to: /home/CPU2017
Filesystem    Type    Size    Used Avail Use% Mounted on
/dev/nvme0n1p2 btrfs  894G   428G   466G   48% /home
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:       IEIT SYSTEMS
Product:      NF5280-M8-A0-R0-00
Product Family: Not specified
Serial:       000000000
-----
```

```
-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  2x Hynix HMC94BDJHA380N 64 GB 2 rank 12800, configured at 8000
 10x Hynix HMC94BDJHA383N 64 GB 2 rank 12800, configured at 8000
  1x Hynix HMC94BDJHA462N 64 GB 2 rank 12800, configured at 8000
  3x Hynix HMC94BDJHA464N 64 GB 2 rank 12800, configured at 8000
-----
```

```
-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:    American Megatrends International, LLC.
BIOS Version:   02.03.00
BIOS Date:      02/08/2025
-----
```

Compiler Version Notes

```
=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 1750

meta brain NF5280G8 (Intel Xeon 6787P)

SPECrate®2017_fp_peak = 1820

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

Compiler Version Notes (Continued)

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 1750

meta brain NF5280G8 (Intel Xeon 6787P)

SPECrate®2017_fp_peak = 1820

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 1750

meta brain NF5280G8 (Intel Xeon 6787P)

SPECrate®2017_fp_peak = 1820

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 1750

meta brain NF5280G8 (Intel Xeon 6787P)

SPECrate®2017_fp_peak = 1820

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1) -fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 1750

meta brain NF5280G8 (Intel Xeon 6787P)

SPECrate®2017_fp_peak = 1820

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

511.povray_r (continued):

```
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-intel-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-intel-V1.2.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-04-01 05:56:52-0400.

Report generated on 2025-05-08 10:03:53 by CPU2017 PDF formatter v6716.

Originally published on 2025-05-06.