



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECspeed®2017_fp_base = 108

SPECspeed®2017_fp_peak = 108

CPU2017 License: 6523


Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

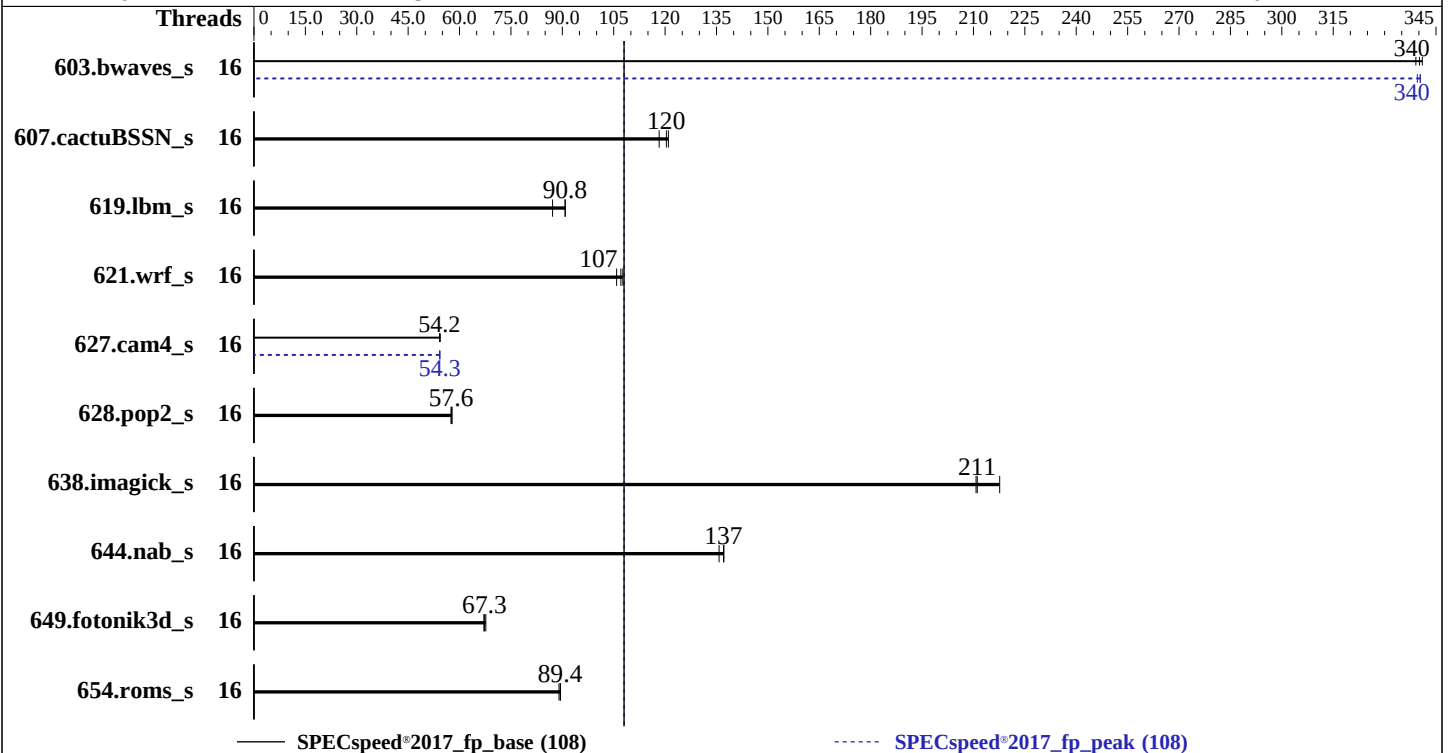

Hardware

CPU Name: Intel Xeon Silver 4309Y
Max MHz: 3600
Nominal: 2800
Enabled: 16 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1.25 MB I+D on chip per core
L3: 12 MB I+D on chip per chip
Other: None
Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200AA-R, running at 2666)
Storage: 125 GB on tmpfs
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
6.4.0-150600.21-default
Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
Parallel: Yes
Firmware: Version P1.00 released Aug-2022
File System: tmpfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECspeed®2017_fp_base = 108

SPECspeed®2017_fp_peak = 108

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	16	173	340	173	341	174	339	16	173	340	173	340	174	340
607.cactuBSSN_s	16	138	121	141	118	138	120	16	138	121	141	118	138	120
619.lbm_s	16	57.6	90.9	57.7	90.8	60.1	87.2	16	57.6	90.9	57.7	90.8	60.1	87.2
621.wrf_s	16	123	108	125	106	124	107	16	123	108	125	106	124	107
627.cam4_s	16	164	54.2	163	54.4	164	54.2	16	163	54.3	163	54.3	164	54.2
628.pop2_s	16	205	57.8	206	57.6	206	57.6	16	205	57.8	206	57.6	206	57.6
638.imagick_s	16	66.3	218	68.4	211	68.3	211	16	66.3	218	68.4	211	68.3	211
644.nab_s	16	127	137	129	136	127	137	16	127	137	129	136	127	137
649.fotonik3d_s	16	136	67.1	135	67.3	135	67.7	16	136	67.1	135	67.3	135	67.7
654.roms_s	16	176	89.5	177	89.0	176	89.4	16	176	89.5	177	89.0	176	89.4

SPECspeed®2017_fp_base = 108

SPECspeed®2017_fp_peak = 108

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu17/lib/intel64:/mnt/ramdisk/cpu17/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECspeed®2017_fp_base = 108

SPECspeed®2017_fp_peak = 108

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

Platform Notes

BIOS settings: Default

Sysinfo program /mnt/ramdisk/cpu17/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Apr 11 09:32:30 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

2. w
09:32:30 up 4:28, 1 user, load average: 5.61, 6.65, 3.95
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 05:13 4:16m 1.10s 0.00s sh
reportable-ic2023.2.3-lin-core-avx512-speed-smt-on-20231121.sh

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 8253805
max locked memory (kbytes, -l) 8192

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECspeed®2017_fp_base = 108

SPECspeed®2017_fp_peak = 108

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

Platform Notes (Continued)

max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 8253805
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
login -- root
-bash
sh reportable-ic2023.2.3-lin-core-avx512-speed-smt-on-20231121.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.2.3-lin-core-avx512-speed-20231121.cfg --define cores=16 --tune base,peak -o all --define smt-on
  --define drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.2.3-lin-core-avx512-speed-20231121.cfg --define cores=16 --tune base,peak --output_format all
  --define smt-on --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed
  --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.002/temlogs/preenv.fpspeed.002.0.log --lognum 002.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu17
-----
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Silver 4309Y CPU @ 2.80GHz
vendor_id       : GenuineIntel
cpu family      : 6
model           : 106
stepping        : 6
microcode       : 0xd0003d1
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs mmio_stale_data eibrs_pbrsb gds bhi
cpu cores       : 8
siblings        : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0:  core ids 0-7
physical id 1:  core ids 0-7
physical id 0:  apicids 0-15
physical id 1:  apicids 64-79
-----
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	46 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	32
On-line CPU(s) list:	0-31
Vendor ID:	GenuineIntel
BIOS Vendor ID:	Intel(R) Corporation

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECspeed®2017_fp_base = 108

SPECspeed®2017_fp_peak = 108

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

Platform Notes (Continued)

Model name: Intel(R) Xeon(R) Silver 4309Y CPU @ 2.80GHz
BIOS Model name: Intel(R) Xeon(R) Silver 4309Y CPU @ 2.80GHz CPU @ 2.8GHz
BIOS CPU family: 179
CPU family: 6
Model: 106
Thread(s) per core: 2
Core(s) per socket: 8
Socket(s): 2
Stepping: 6
CPU(s) scaling MHz: 47%
CPU max MHz: 3600.0000
CPU min MHz: 800.0000
BogoMIPS: 5600.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid fsrm md_clear pconfig flush_l1d arch_capabilities
Virtualization: VT-x
L1d cache: 768 KiB (16 instances)
L1i cache: 512 KiB (16 instances)
L2 cache: 20 MiB (16 instances)
L3 cache: 24 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-7,16-23
NUMA node1 CPU(s): 8-15,24-31
Vulnerability Gather data sampling: Mitigation; Microcode
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Mitigation; Clear CPU buffers; SMT vulnerable
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS SW sequence; BHI SW loop, KVM SW loop
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	1.3M	20M	20	Unified	2	1024	1	64
L3	12M	24M	12	Unified	3	16384	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECspeed®2017_fp_base = 108

SPECspeed®2017_fp_peak = 108

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-7,16-23
node 0 size: 1031705 MB
node 0 free: 1028199 MB
node 1 cpus: 8-15,24-31
node 1 size: 1031771 MB
node 1 free: 1021308 MB
node distances:
node    0    1
 0:   10   20
 1:   20   10
```

9. /proc/meminfo

MemTotal: 2113000260 kB

10. who -r

run-level 3 Apr 11 05:04

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled apparmor auditd cron firewalld getty@ irqbalance issue-generator kbdsettings kdump
kdump-early kdump-notify nvme-fc-boot-connections nvme-fc-autoconnect postfix purge-kernels
rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
wickedd-nanny
enabled-runtime systemd-remount-fs
disabled boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebttables fsid
grub2-once haveged issue-add-ssh-keys kexec-load lunmask nfs nfs-blkmap rpcbind
rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect systemd-userdbd wickedd
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=49309a94-677e-49bd-9d6a-63d4d0c75f08
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=365M,high
crashkernel=72M,low
```

14. cpupower frequency-info

analyzing CPU 22:
current policy: frequency should be within 800 MHz and 3.60 GHz.
The governor "performance" may decide which speed to use within this range.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECspeed®2017_fp_base = 108

SPECspeed®2017_fp_peak = 108

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

Platform Notes (Continued)

boost state support:

Supported: yes

Active: yes

15. sysctl

```
kernel.numa_balancing      1
kernel.randomize_va_space  2
vm.compaction_proactiveness 20
vm.dirty_background_bytes   0
vm.dirty_background_ratio   10
vm.dirty_bytes              0
vm.dirty_expire_centisecs   3000
vm.dirty_ratio              20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold        500
vm.min_unmapped_ratio       1
vm.nr_hugepages             0
vm.nr_hugepages_mempolicy   0
vm.nr_overcommit_hugepages  0
vm.swappiness               60
vm.watermark_boost_factor   15000
vm.watermark_scale_factor   10
vm.zone_reclaim_mode        0
```

16. /sys/kernel/mm/transparent_hugepage

```
defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000
```

18. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
```

19. Disk information

SPEC is set to: /mnt/ramdisk/cpu17

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	125G	11G	115G	9%	/mnt/ramdisk

20. /sys/devices/virtual/dmi/id

Product: HDR-RM2386212I

21. dmidecode

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECspeed®2017_fp_base = 108

SPECspeed®2017_fp_peak = 108

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

Platform Notes (Continued)

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Hynix TLR4128G32Q422 128 GB 4 rank 3200, configured at 2666

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.

BIOS Version: P1.00

BIOS Date: 08/23/2022

BIOS Revision: 5.22

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icx

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECspeed®2017_fp_base = 108

SPECspeed®2017_fp_peak = 108

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

619.lbm_s: -DSPEC_LP64

621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG

628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

-assume byterecl

638.imagick_s: -DSPEC_LP64

644.nab_s: -DSPEC_LP64

649.fotonik3d_s: -DSPEC_LP64

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp

-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib

-ljemalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs

-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECspeed®2017_fp_base = 108

SPECspeed®2017_fp_peak = 108

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECspeed®2017_fp_base = 108

SPECspeed®2017_fp_peak = 108

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

Fortran benchmarks:

603.bwaves_s: -w -m64 -wl, -z, muldefs -DSPEC_OPENMP -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -w -m64 -std=c11 -wl, -z, muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Hexadata-Platform-Flags-Intel-ICX.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Hexadata-Platform-Flags-Intel-ICX.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-04-11 00:02:30-0400.

Report generated on 2025-05-20 15:58:53 by CPU2017 PDF formatter v6716.

Originally published on 2025-05-20.