



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECrate®2017_fp_base = 145

SPECrate®2017_fp_peak = 146

CPU2017 License: 6523


Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

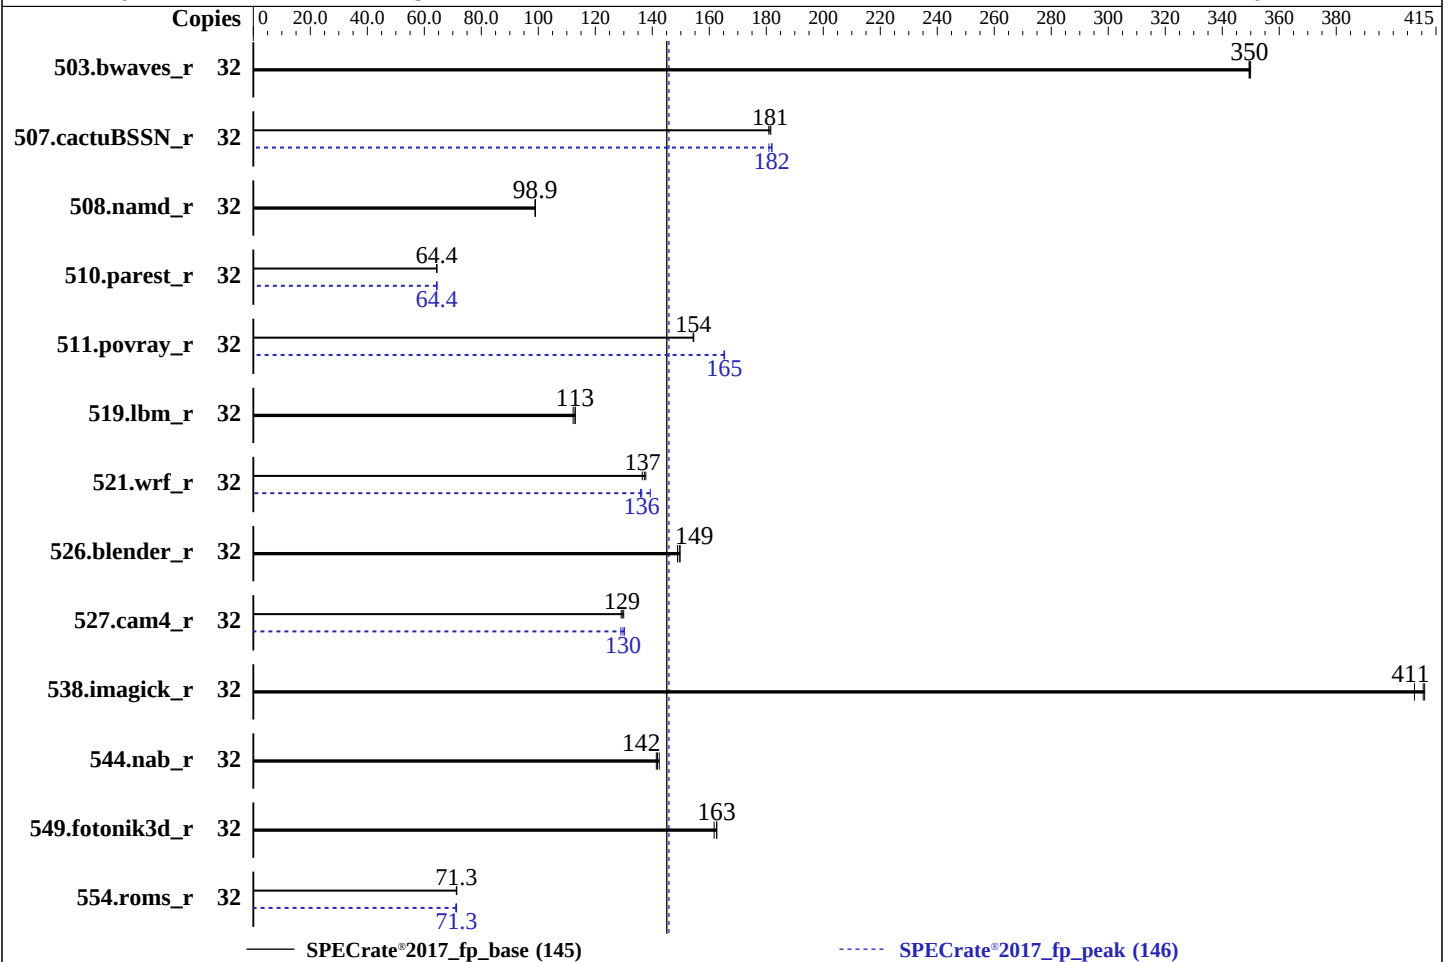

Hardware

CPU Name: Intel Xeon Silver 4309Y
Max MHz: 3600
Nominal: 2800
Enabled: 16 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1.25 MB I+D on chip per core
L3: 12 MB I+D on chip per chip
Other: None
Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200AA-R, running at 2666)
Storage: 125 GB on tmpfs
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6 6.4.0-150600.21-default
Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version P1.00 released Aug-2022
File System: tmpfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECrate®2017_fp_base = 145

SPECrate®2017_fp_peak = 146

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	<u>918</u>	<u>350</u>	918	349	917	350	32	<u>918</u>	<u>350</u>	918	349	917	350
507.cactuBSSN_r	32	223	182	224	181	<u>223</u>	<u>181</u>	32	<u>223</u>	<u>182</u>	223	182	224	181
508.namd_r	32	<u>307</u>	<u>98.9</u>	307	98.9	307	99.0	32	<u>307</u>	<u>98.9</u>	307	98.9	307	99.0
510.parest_r	32	<u>1300</u>	<u>64.4</u>	1302	64.3	1300	64.4	32	<u>1300</u>	<u>64.4</u>	<u>1300</u>	<u>64.4</u>	1300	64.4
511.povray_r	32	484	154	484	155	<u>484</u>	<u>154</u>	32	<u>452</u>	<u>165</u>	452	165	452	165
519.lbm_r	32	299	113	301	112	<u>299</u>	<u>113</u>	32	299	113	301	112	<u>299</u>	<u>113</u>
521.wrf_r	32	525	136	520	138	<u>522</u>	<u>137</u>	32	528	136	515	139	<u>526</u>	<u>136</u>
526.blender_r	32	<u>326</u>	<u>149</u>	327	149	325	150	32	<u>326</u>	<u>149</u>	327	149	325	150
527.cam4_r	32	<u>432</u>	<u>129</u>	434	129	431	130	32	430	130	<u>431</u>	<u>130</u>	434	129
538.imagick_r	32	<u>194</u>	<u>411</u>	195	407	194	411	32	<u>194</u>	<u>411</u>	195	407	194	411
544.nab_r	32	381	141	378	142	<u>380</u>	<u>142</u>	32	381	141	378	142	<u>380</u>	<u>142</u>
549.fotonik3d_r	32	771	162	767	163	<u>767</u>	<u>163</u>	32	771	162	767	163	<u>767</u>	<u>163</u>
554.roms_r	32	713	71.4	714	71.2	<u>713</u>	<u>71.3</u>	32	<u>713</u>	<u>71.3</u>	716	71.0	713	71.3

SPECrate®2017_fp_base = 145

SPECrate®2017_fp_peak = 146

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu17/lib/intel64:/mnt/ramdisk/cpu17/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECrate®2017_fp_base = 145

SPECrate®2017_fp_peak = 146

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings: Default

Sysinfo program /mnt/ramdisk/cpu17/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sat Apr 12 00:11:27 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

2. w
00:11:27 up 19:07, 1 user, load average: 25.28, 30.35, 31.21
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - Fri05 6:36m 1.15s 0.01s sh
reportable-ic2023.2.3-lin-core-avx512-rate-smt-on-20231121.sh

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECrate®2017_fp_base = 145

SPECrate®2017_fp_peak = 146

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 8253805
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 8253805
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
login -- root
-bash
sh reportable-ic2023.2.3-lin-core-avx512-rate-smt-on-20231121.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 -c
ic2023.2.3-lin-core-avx512-rate-20231121.cfg --define smt-on --define cores=16 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 --configfile
ic2023.2.3-lin-core-avx512-rate-20231121.cfg --define smt-on --define cores=16 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.004/templogs/preenv.fprate.004.0.log --lognum 004.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu17
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Silver 4309Y CPU @ 2.80GHz
vendor_id      : GenuineIntel
cpu family     : 6
model          : 106
stepping       : 6
microcode      : 0xd0003d1
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs mmio_stale_data eibrs_pbrsb gds bhi
cpu cores      : 8
siblings       : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-7
physical id 1: core ids 0-7
physical id 0: apicids 0-15
physical id 1: apicids 64-79
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECrate®2017_fp_base = 145

SPECrate®2017_fp_peak = 146

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	46 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	32
On-line CPU(s) list:	0-31
Vendor ID:	GenuineIntel
BIOS Vendor ID:	Intel(R) Corporation
Model name:	Intel(R) Xeon(R) Silver 4309Y CPU @ 2.80GHz
BIOS Model name:	Intel(R) Xeon(R) Silver 4309Y CPU @ 2.80GHz CPU @ 2.8GHz
BIOS CPU family:	179
CPU family:	6
Model:	106
Thread(s) per core:	2
Core(s) per socket:	8
Socket(s):	2
Stepping:	6
CPU(s) scaling MHz:	40%
CPU max MHz:	3600.0000
CPU min MHz:	800.0000
BogoMIPS:	5600.00
Flags:	fpv vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid fsrm md_clear pconfig flush_l1d arch_capabilities
Virtualization:	VT-x
L1d cache:	768 KiB (16 instances)
L1i cache:	512 KiB (16 instances)
L2 cache:	20 MiB (16 instances)
L3 cache:	24 MiB (2 instances)
NUMA node(s):	2
NUMA node0 CPU(s):	0-7,16-23
NUMA node1 CPU(s):	8-15,24-31
Vulnerability Gather data sampling:	Mitigation; Microcode
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Mitigation; Clear CPU buffers; SMT vulnerable
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

SPECrate®2017_fp_base = 145

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECrate®2017_fp_peak = 146

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

Platform Notes (Continued)

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS SW sequence; BHI SW loop, KVM SW loop
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	1.3M	20M	20	Unified	2	1024	1	64
L3	12M	24M	12	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-7,16-23

node 0 size: 1031705 MB

node 0 free: 1012136 MB

node 1 cpus: 8-15,24-31

node 1 size: 1031771 MB

node 1 free: 1012930 MB

node distances:

node 0 1

0: 10 20

1: 20 10

9. /proc/meminfo

MemTotal: 2113000260 kB

10. who -r

run-level 3 Apr 11 05:04

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled apparmor auditd cron firewalld getty@ irqbalance issue-generator kbdsettings kdump
kdump-early kdump-notify nvme-fc-boot-connections nvme-fc-autoconnect postfix purge-kernels
rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
wickedd-nanny

enabled-runtime systemd-remount-fs

disabled boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebttables fsid
grub2-once haveged issue-add-ssh-keys kexec-load lunmask nfs nfs-blkmap rpcbind
rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd

indirect systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default

root=UUID=49309a94-677e-49bd-9d6a-63d4d0c75f08

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECrate®2017_fp_base = 145

SPECrate®2017_fp_peak = 146

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

Platform Notes (Continued)

```
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=365M,high
crashkernel=72M,low
```

14. cpupower frequency-info

analyzing CPU 22:

current policy: frequency should be within 800 MHz and 3.60 GHz.
The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

15. sysctl

```
kernel.numa_balancing      1
kernel.randomize_va_space  2
vm.compaction_proactiveness 20
vm.dirty_background_bytes   0
vm.dirty_background_ratio   10
vm.dirty_bytes              0
vm.dirty_expire_centisecs   3000
vm.dirty_ratio              20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold        500
vm.min_unmapped_ratio       1
vm.nr_hugepages              0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages   0
vm.swappiness                60
vm.watermark_boost_factor    15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode         0
```

16. /sys/kernel/mm/transparent_hugepage

```
defrag      always defer defer+madvise [madvise] never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

18. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECrate®2017_fp_base = 145

SPECrate®2017_fp_peak = 146

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

Platform Notes (Continued)

19. Disk information

SPEC is set to: /mnt/ramdisk/cpu17

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	125G	34G	92G	27%	/mnt/ramdisk

20. /sys/devices/virtual/dmi/id

Product: HDR-RM2386212I

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Hynix TLR4128G32Q422 128 GB 4 rank 3200, configured at 2666

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor:	American Megatrends International, LLC.
BIOS Version:	P1.00
BIOS Date:	08/23/2022
BIOS Revision:	5.22

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECrate®2017_fp_base = 145

SPECrate®2017_fp_peak = 146

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECrate®2017_fp_base = 145

SPECrate®2017_fp_peak = 146

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

Base Portability Flags (Continued)

510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECrate®2017_fp_base = 145

SPECrate®2017_fp_peak = 146

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECrate®2017_fp_base = 145

SPECrate®2017_fp_peak = 146

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

508.namd_r: basepeak = yes

```
510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Hexadata-Platform-Flags-Intel-ICX.html>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS3000 Ver: ILX-002
(Intel Xeon Silver 4309Y, 2.80 GHz)

SPECrate®2017_fp_base = 145

SPECrate®2017_fp_peak = 146

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: May-2021

Software Availability: Jun-2024

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Hexadata-Platform-Flags-Intel-ICX.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-04-11 14:41:26-0400.

Report generated on 2025-05-20 15:59:12 by CPU2017 PDF formatter v6716.

Originally published on 2025-05-20.