



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6426Y, 2.50 GHz)

SPECrate®2017_fp_base = 221

SPECrate®2017_fp_peak = 221

CPU2017 License: 6523


Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2023

Software Availability: Jun-2024

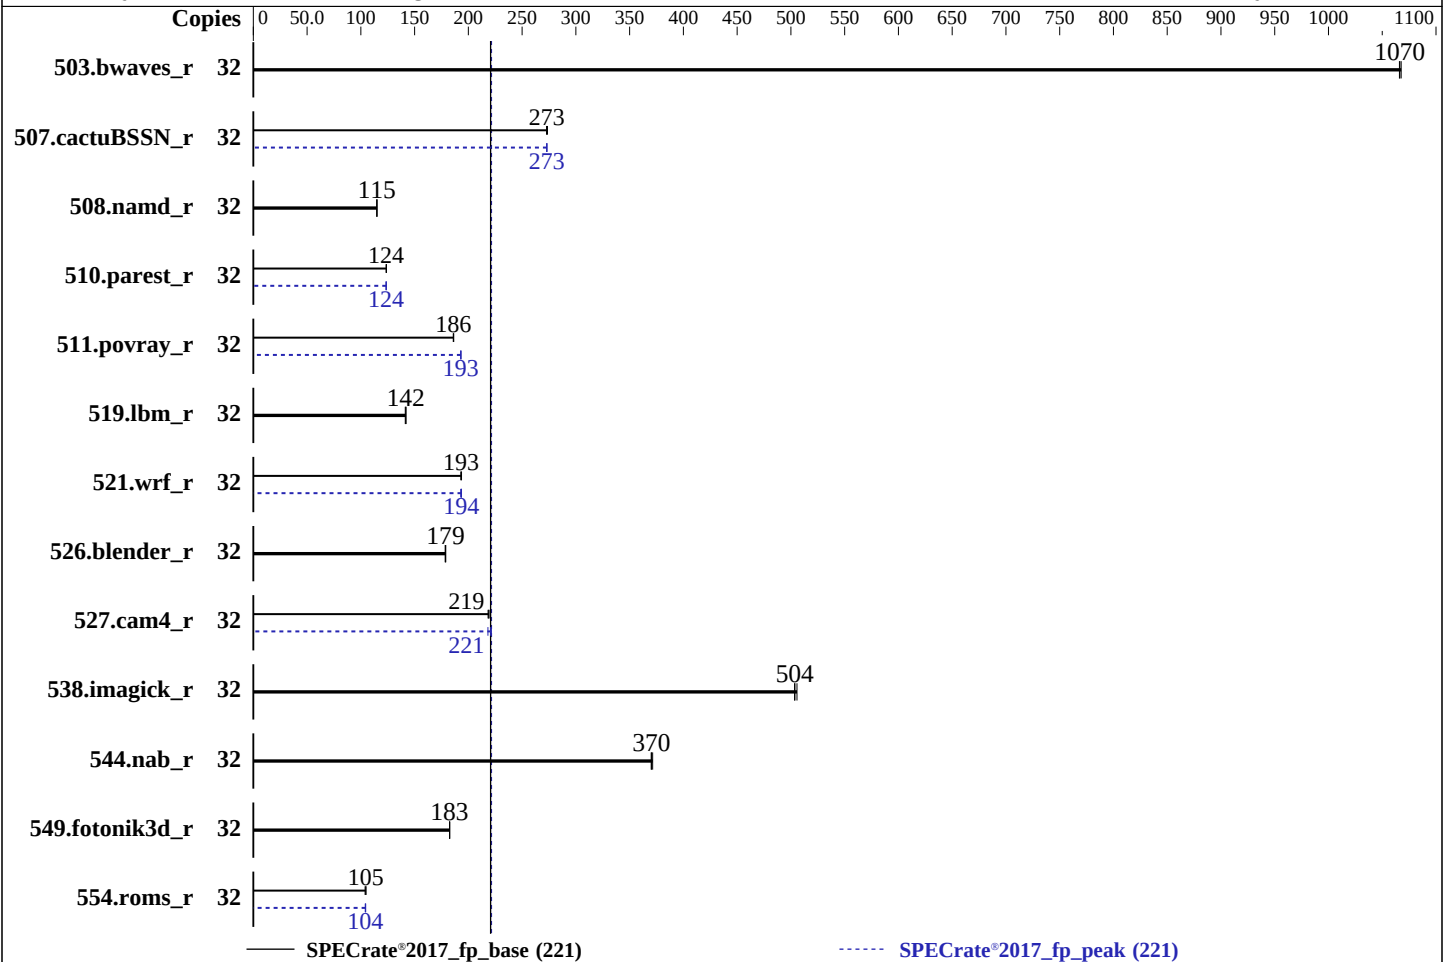

Hardware

CPU Name: Intel Xeon Gold 6426Y
Max MHz: 4100
Nominal: 2500
Enabled: 16 cores, 1 chip, 2 threads/core
Orderable: 1 Chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 37.5 MB I+D on chip per chip
Other: None
Memory: 256 GB (8 x 32 GB 1Rx4 PC5-5600B-R, running at 4800)
Storage: 125 GB on tmpfs
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6 6.4.0-150600.21-default
Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 1.26 released Apr-2023
File System: tmpfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6426Y, 2.50 GHz)

SPECrate®2017_fp_base = 221

SPECrate®2017_fp_peak = 221

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2023

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	301	1070	<u>301</u>	<u>1070</u>	301	1070	32	301	1070	<u>301</u>	<u>1070</u>	301	1070
507.cactuBSSN_r	32	148	274	149	273	<u>148</u>	<u>273</u>	32	148	273	148	273	<u>148</u>	<u>273</u>
508.namd_r	32	<u>264</u>	<u>115</u>	264	115	265	115	32	<u>264</u>	<u>115</u>	264	115	265	115
510.parest_r	32	<u>677</u>	<u>124</u>	676	124	677	124	32	678	124	677	124	<u>678</u>	<u>124</u>
511.povray_r	32	<u>401</u>	<u>186</u>	401	186	402	186	32	387	193	<u>387</u>	<u>193</u>	387	193
519.lbm_r	32	239	141	<u>238</u>	<u>142</u>	238	142	32	239	141	<u>238</u>	<u>142</u>	238	142
521.wrf_r	32	<u>371</u>	<u>193</u>	370	194	371	193	32	370	194	372	193	<u>370</u>	<u>194</u>
526.blender_r	32	<u>272</u>	<u>179</u>	273	178	272	179	32	<u>272</u>	<u>179</u>	273	178	272	179
527.cam4_r	32	255	219	256	218	<u>256</u>	<u>219</u>	32	253	221	256	218	<u>254</u>	<u>221</u>
538.imagick_r	32	157	506	<u>158</u>	<u>504</u>	158	503	32	157	506	<u>158</u>	<u>504</u>	158	503
544.nab_r	32	146	370	<u>145</u>	<u>370</u>	145	371	32	146	370	<u>145</u>	<u>370</u>	145	371
549.fotonik3d_r	32	683	182	<u>683</u>	<u>183</u>	682	183	32	683	182	<u>683</u>	<u>183</u>	682	183
554.roms_r	32	485	105	<u>486</u>	<u>105</u>	489	104	32	<u>487</u>	<u>104</u>	487	104	488	104

SPECrate®2017_fp_base = 221

SPECrate®2017_fp_peak = 221

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu17/lib/intel64:/mnt/ramdisk/cpu17/je5.0.1-64"
MALLOCONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6426Y, 2.50 GHz)

SPECrate®2017_fp_base = 221

SPECrate®2017_fp_peak = 221

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2023

Software Availability: Jun-2024

General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings: Default

Sysinfo program /mnt/ramdisk/cpu17/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed Apr 30 04:41:36 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
04:41:36 up 5:38, 1 user, load average: 23.12, 29.80, 31.05
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1      -             23:08    5:23m  0.80s  0.01s sh
reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6426Y, 2.50 GHz)

SPECrate®2017_fp_base = 221

SPECrate®2017_fp_peak = 221

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2023

Software Availability: Jun-2024

Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 1027773
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 1027773
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
login -- root
-bash
sh reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=16 --define physicalfirst
--define no-numa --tune base,peak -o all --define drop_caches fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=16 --define physicalfirst
--define no-numa --tune base,peak --output_format all --define drop_caches --nopower --runmode rate --tune
base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu17
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 6426Y
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b000590
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores      : 16
siblings       : 32
1 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-15
physical id 0: apicids 0-31
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6426Y, 2.50 GHz)

SPECrate®2017_fp_base = 221

SPECrate®2017_fp_peak = 221

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2023

Software Availability: Jun-2024

Platform Notes (Continued)

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	32
On-line CPU(s) list:	0-31
Vendor ID:	GenuineIntel
BIOS Vendor ID:	Intel(R) Corporation
Model name:	Intel(R) Xeon(R) Gold 6426Y
BIOS Model name:	Intel(R) Xeon(R) Gold 6426Y CPU @ 2.5GHz
BIOS CPU family:	179
CPU family:	6
Model:	143
Thread(s) per core:	2
Core(s) per socket:	16
Socket(s):	1
Stepping:	8
CPU(s) scaling MHz:	45%
CPU max MHz:	4100.0000
CPU min MHz:	800.0000
BogoMIPS:	5000.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdc_m pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512v1 xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req hfi vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization:	VT-x
L1d cache:	768 KiB (16 instances)
L1i cache:	512 KiB (16 instances)
L2 cache:	32 MiB (16 instances)
L3 cache:	37.5 MiB (1 instance)
NUMA node(s):	1
NUMA node0 CPU(s):	0-31
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6426Y, 2.50 GHz)

SPECrate®2017_fp_base = 221

SPECrate®2017_fp_peak = 221

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2023

Software Availability: Jun-2024

Platform Notes (Continued)

Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	2M	32M	16	Unified	2	2048	1	64
L3	37.5M	37.5M	15	Unified	3	40960	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0-31
node 0 size: 256969 MB
node 0 free: 231010 MB
node distances:
node 0
0: 10
```

9. /proc/meminfo

MemTotal: 263136984 kB

10. who -r

run-level 3 Apr 29 23:03

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	apparmor auditd cron firewalld getty@ irqbalance issue-generator kbdsettings kdump kdump-early kdump-notify nvme-fc-boot-connections nvme-fc-autoconnect postfix purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebtables fsidd grub2-once haveged issue-add-ssh-keys kexec-load lunmask nfs nfs-blkmap rpcbind rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect	systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=e40d4a6f-b67a-430a-86f1-3d3ea26a7eb1
splash=silent
resume=/dev/disk/by-uuid/767864c6-130c-4bba-bf53-bf715ee2aa3c
mitigations=auto
quiet
security=apparmor
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6426Y, 2.50 GHz)

SPECrate®2017_fp_base = 221

SPECrate®2017_fp_peak = 221

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2023

Software Availability: Jun-2024

Platform Notes (Continued)

crashkernel=355M,high
crashkernel=72M,low

14. cpupower frequency-info

analyzing CPU 24:

current policy: frequency should be within 800 MHz and 4.10 GHz.

The governor "performance" may decide which speed to use
within this range.

boost state support:

Supported: yes

Active: yes

15. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

16. /sys/kernel/mm/transparent_hugepage

defrag	always	defer	defer+madvise	[madvise]	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

18. OS release

From /etc/*-release /etc/*-version

os-release SUSE Linux Enterprise Server 15 SP6

19. Disk information

SPEC is set to: /mnt/ramdisk/cpu17

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6426Y, 2.50 GHz)

SPECrate®2017_fp_base = 221

SPECrate®2017_fp_peak = 221

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2023

Software Availability: Jun-2024

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	125G	21G	105G	17%	/mnt/ramdisk

20. /sys/devices/virtual/dmi/id
Vendor: HEXADATA
Product: HD-RS4100

21. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
8x Hynix TR532G56S446 32 GB 1 rank 5600, configured at 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 1.26
BIOS Date: 04/17/2023
BIOS Revision: 5.29

Compiler Version Notes

=====

C		519.lbm_r(base, peak)	538.imagick_r(base, peak)	544.nab_r(base, peak)
---	--	-----------------------	---------------------------	-----------------------

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C++		508.namd_r(base, peak)	510.parest_r(base, peak)
-----	--	------------------------	--------------------------

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C++, C		511.povray_r(base, peak)	526.blender_r(base, peak)
--------	--	--------------------------	---------------------------

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C++, C, Fortran		507.cactuBSSN_r(base, peak)
-----------------	--	-----------------------------

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6426Y, 2.50 GHz)

SPECrate®2017_fp_base = 221

SPECrate®2017_fp_peak = 221

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2023

Software Availability: Jun-2024

Compiler Version Notes (Continued)

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6426Y, 2.50 GHz)

SPECrate®2017_fp_base = 221

SPECrate®2017_fp_peak = 221

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2023

Software Availability: Jun-2024

Base Portability Flags (Continued)

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6426Y, 2.50 GHz)

SPECrate®2017_fp_base = 221

SPECrate®2017_fp_peak = 221

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2023

Software Availability: Jun-2024

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6426Y, 2.50 GHz)

SPECrate®2017_fp_base = 221

SPECrate®2017_fp_peak = 221

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2023

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

508.namd_r: basepeak = yes

```
510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6426Y, 2.50 GHz)

SPECrate®2017_fp_base = 221

SPECrate®2017_fp_peak = 221

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Apr-2025

Hardware Availability: Apr-2023

Software Availability: Jun-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Hexadata-Platform-Flags-Intel-rev1.7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Hexadata-Platform-Flags-Intel-rev1.7.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-04-29 19:11:36-0400.

Report generated on 2025-05-20 16:00:49 by CPU2017 PDF formatter v6716.

Originally published on 2025-05-20.