



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2190V3 (AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1260

SPECrate®2017\_fp\_peak = 1390

CPU2017 License: 6865


Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

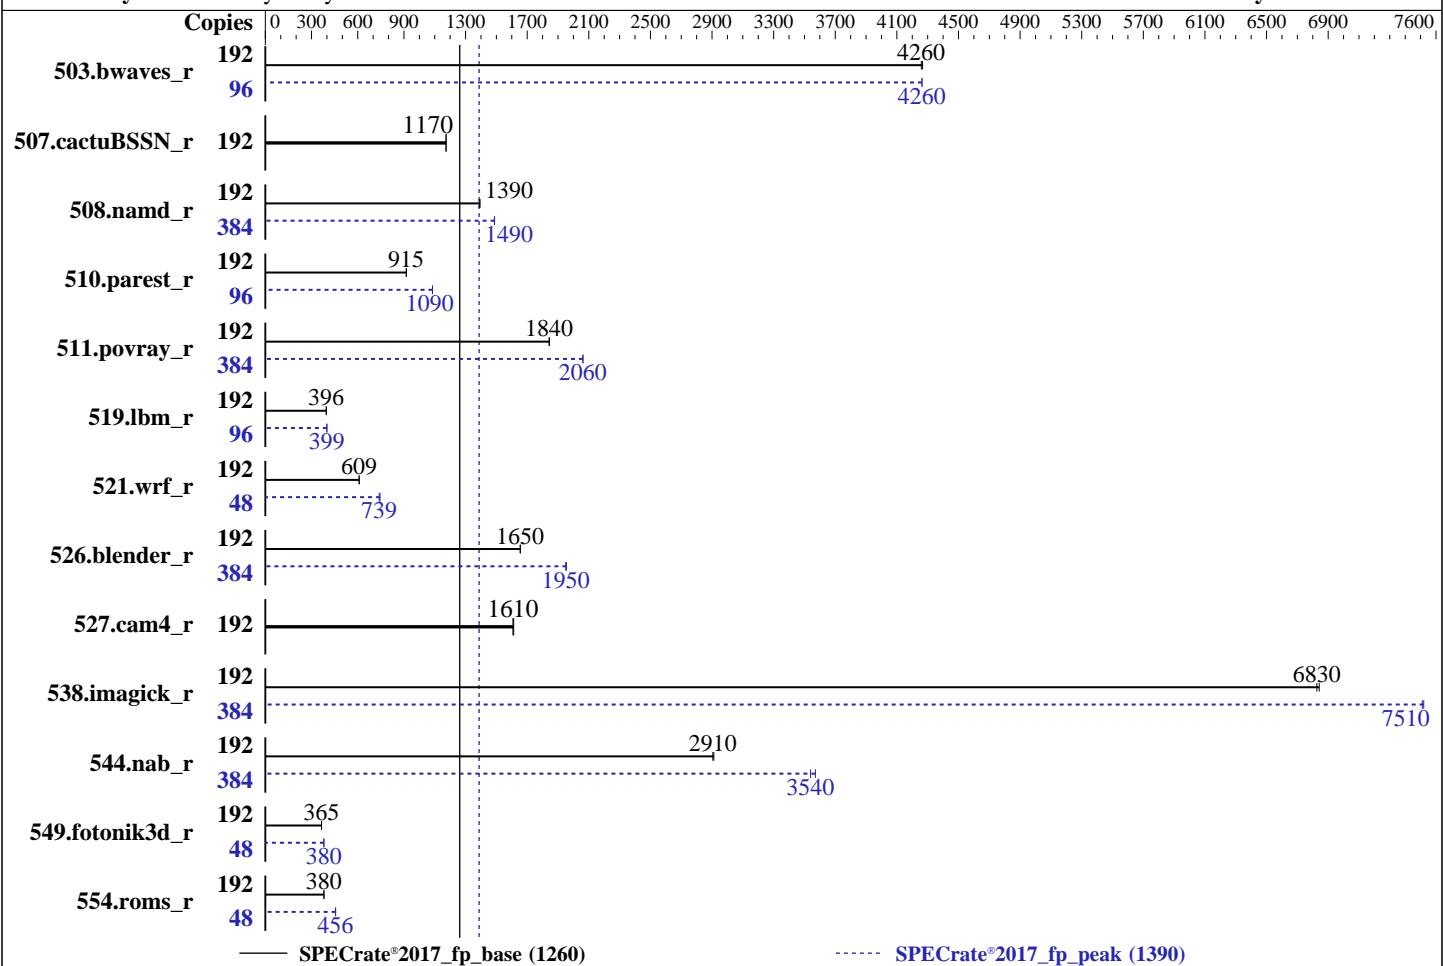

— SPECrate®2017\_fp\_base (1260)

····· SPECrate®2017\_fp\_peak (1390)

## Hardware

CPU Name: AMD EPYC 9965  
 Max MHz: 3700  
 Nominal: 2250  
 Enabled: 192 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 384 MB I+D on chip per chip, 32 MB shared / 16 cores  
 Other: None  
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R)  
 Storage: 1 x 960 GB NVME SSD  
 Other: CPU Cooling: Air

## Software

OS: SUSE Linux Enterprise Server 15 SP6  
 6.4.0-150600.21-default  
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
 Parallel: No  
 Firmware: Version 1.09.0 released Mar-2025  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2190V3 (AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1260

SPECrate®2017\_fp\_peak = 1390

CPU2017 License: 6865

Test Date: Apr-2025

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2025

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Oct-2024

## Results Table

| Benchmark       | Base   |             |             |             |             |         |       | Peak   |            |             |            |             |         |       |
|-----------------|--------|-------------|-------------|-------------|-------------|---------|-------|--------|------------|-------------|------------|-------------|---------|-------|
|                 | Copies | Seconds     | Ratio       | Seconds     | Ratio       | Seconds | Ratio | Copies | Seconds    | Ratio       | Seconds    | Ratio       | Seconds | Ratio |
| 503.bwaves_r    | 192    | <b>452</b>  | <b>4260</b> | 451         | 4270        |         |       | 96     | <b>226</b> | <b>4260</b> | 226        | 4260        |         |       |
| 507.cactubSSN_r | 192    | 207         | 1170        | <b>207</b>  | <b>1170</b> |         |       | 192    | 207        | 1170        | <b>207</b> | <b>1170</b> |         |       |
| 508.namd_r      | 192    | 131         | 1390        | <b>131</b>  | <b>1390</b> |         |       | 384    | <b>245</b> | <b>1490</b> | 245        | 1490        |         |       |
| 510.parest_r    | 192    | <b>549</b>  | <b>915</b>  | 548         | 916         |         |       | 96     | <b>231</b> | <b>1090</b> | 231        | 1090        |         |       |
| 511.povray_r    | 192    | 243         | 1840        | <b>243</b>  | <b>1840</b> |         |       | 384    | <b>435</b> | <b>2060</b> | 435        | 2060        |         |       |
| 519.lbm_r       | 192    | 511         | 396         | <b>512</b>  | <b>396</b>  |         |       | 96     | 253        | 400         | <b>253</b> | <b>399</b>  |         |       |
| 521.wrf_r       | 192    | <b>706</b>  | <b>609</b>  | 706         | 610         |         |       | 48     | 144        | 745         | <b>145</b> | <b>739</b>  |         |       |
| 526.blender_r   | 192    | 177         | 1660        | <b>177</b>  | <b>1650</b> |         |       | 384    | 299        | 1950        | <b>300</b> | <b>1950</b> |         |       |
| 527.cam4_r      | 192    | 208         | 1610        | <b>209</b>  | <b>1610</b> |         |       | 192    | 208        | 1610        | <b>209</b> | <b>1610</b> |         |       |
| 538.imagick_r   | 192    | 69.8        | 6840        | <b>69.9</b> | <b>6830</b> |         |       | 384    | <b>127</b> | <b>7510</b> | 127        | 7520        |         |       |
| 544.nab_r       | 192    | 111         | 2910        | <b>111</b>  | <b>2910</b> |         |       | 384    | 181        | 3570        | <b>183</b> | <b>3540</b> |         |       |
| 549.fotonik3d_r | 192    | <b>2052</b> | <b>365</b>  | 2049        | 365         |         |       | 48     | 492        | 380         | <b>492</b> | <b>380</b>  |         |       |
| 554.roms_r      | 192    | <b>802</b>  | <b>380</b>  | 802         | 380         |         |       | 48     | <b>167</b> | <b>456</b>  | 167        | 456         |         |       |

SPECrate®2017\_fp\_base = 1260

SPECrate®2017\_fp\_peak = 1390

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
 To free node-local memory and avoid remote memory usage,  
 'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
 To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
 To disable address space layout randomization (ASLR) to reduce run-to-run  
 variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2190V3 (AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1260

SPECrate®2017\_fp\_peak = 1390

CPU2017 License: 6865

Test Date: Apr-2025

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2025

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Oct-2024

## Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/CPU2017/amd_rate_aocc500_znver5_A_lib/lib:/home/CPU2017/amd_rate_aocc500_znver5_A_lib/lib32:  
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

SVM Mode = disable

DRAM Scrub time = disable

NUMA nodes per socket = NPS4

Determinism Slider = Power

cTDP = 500

Package Power Limit = 500

```
Sysinfo program /home/CPU2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Mon Apr 21 00:54:34 2025
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2190V3 (AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1260

SPECrate®2017\_fp\_peak = 1390

CPU2017 License: 6865

Test Date: Apr-2025

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2025

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Oct-2024

## Platform Notes (Continued)

```
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
```

---

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

---

```
2. w
00:54:34 up 3 days, 4:27, 1 user, load average: 203.08, 334.71, 342.52
USER      TTY      FROM           LOGIN@     IDLE    JCPU    PCPU WHAT
root      tty2      -          20:48      4:02m   1.23s   0.24s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

---

```
3. Username
From environment variable $USER: root
```

---

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority       (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 3091324
max locked memory        (kbytes, -l) 2097152
max memory size          (kbytes, -m) unlimited
open files               (-n) 65535
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority        (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 3091324
virtual memory            (kbytes, -v) unlimited
file locks               (-x) unlimited
```

---

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
login -- root
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2190V3 (AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1260

SPECrate®2017\_fp\_peak = 1390

CPU2017 License: 6865

Test Date: Apr-2025

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2025

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Oct-2024

## Platform Notes (Continued)

-----  
6. /proc/cpuinfo  
model name : AMD EPYC 9965 192-Core Processor  
vendor\_id : AuthenticAMD  
cpu family : 26  
model : 17  
stepping : 0  
microcode : 0xb101028  
bugs : sysret\_ss\_attrs spectre\_v1 spectre\_v2 spec\_store\_bypass  
TLB size : 192 4K pages  
cpu cores : 192  
siblings : 384  
1 physical ids (chips)  
384 processors (hardware threads)  
physical id 0: core ids 0-191  
physical id 0: apicids 0-383  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.39.3:

|                      |   |
|----------------------|---|
| Architecture:        | x86_64  |
| CPU op-mode(s):      | 32-bit, 64-bit  |
| Address sizes:       | 52 bits physical, 57 bits virtual   |
| Byte Order:          | Little Endian   |
| CPU(s):              | 384   |
| On-line CPU(s) list: | 0-383   |
| Vendor ID:           | AuthenticAMD  |
| BIOS Vendor ID:      | Advanced Micro Devices, Inc.  |
| Model name:          | AMD EPYC 9965 192-Core Processor  |
| BIOS Model name:     | AMD EPYC 9965 192-Core Processor  |
| BIOS CPU family:     | Unknown CPU @ 2.2GHz  |
| CPU family:          | 107   |
| Model:               | 26  |
| Thread(s) per core:  | 17  |
| Core(s) per socket:  | 2   |
| Socket(s):           | 192   |
| Stepping:            | 1   |
| Frequency boost:     | 0   |
| CPU(s) scaling MHz:  | enabled   |
| CPU max MHz:         | 61%   |
| CPU min MHz:         | 3700.1951   |
| BogoMIPS:            | 1500.0000   |
| Flags:               | 4492.98   |
|                      | fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat<br>pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb<br>rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid<br>extd_apicid aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid<br>sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm<br>cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch<br>osw ibs skininit wdt tce topoext perfctr_core perfctr_nb bpext<br>perfctr_llc mwaitx cpb cat_13 cdp_13 hw_pstate ssbd mba perfmon_v2<br>ibrs ibpb stibp ibrs_enhanced vmmcall fsqsbbase tsc_adjust bmil avx2<br>smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap<br>avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt<br>xsavevc xgetbv1 xsaves cqmq_llc cqmq_occult_llc cqmq_mbm_total<br>cqmq_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf<br>xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock<br>nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter |

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Kaytus Systems Pte. Ltd.**

**KR2190V3 (AMD EPYC 9965)**

**SPECrate®2017\_fp\_base = 1260**

**SPECrate®2017\_fp\_peak = 1390**

**CPU2017 License:** 6865

**Test Date:** Apr-2025

**Test Sponsor:** Kaytus Systems Pte. Ltd.

**Hardware Availability:** Feb-2025

**Tested by:** Kaytus Systems Pte. Ltd.

**Software Availability:** Oct-2024

## Platform Notes (Continued)

```
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpocntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_lld debug_swap
```

Virtualization:

AMD-V

L1d cache:

9 MiB (192 instances)

L1i cache:

6 MiB (192 instances)

L2 cache:

192 MiB (192 instances)

L3 cache:

384 MiB (12 instances)

NUMA node(s):

4

NUMA node0 CPU(s):

0-47,192-239

NUMA node1 CPU(s):

48-95,240-287

NUMA node2 CPU(s):

96-143,288-335

NUMA node3 CPU(s):

144-191,336-383

Vulnerability Gather data sampling:

Not affected

Vulnerability Itlb multihit:

Not affected

Vulnerability Llft:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Mmio stale data:

Not affected

Vulnerability Reg file data sampling:

Not affected

Vulnerability Retbleed:

Not affected

Vulnerability Spec rstack overflow:

Not affected

Vulnerability Spec store bypass:

Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1:

Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization

Vulnerability Spectre v2:

Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS  | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d  | 48K      | 9M       | 12   | Data        | 1     | 64    | 1        | 64             |
| L1i  | 32K      | 6M       | 8    | Instruction | 1     | 64    | 1        | 64             |
| L2   | 1M       | 192M     | 16   | Unified     | 2     | 1024  | 1        | 64             |
| L3   | 32M      | 384M     | 16   | Unified     | 3     | 32768 | 1        | 64             |

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-47,192-239

node 0 size: 192891 MB

node 0 free: 191979 MB

node 1 cpus: 48-95,240-287

node 1 size: 193510 MB

node 1 free: 192623 MB

node 2 cpus: 96-143,288-335

node 2 size: 193472 MB

node 2 free: 192661 MB

node 3 cpus: 144-191,336-383

node 3 size: 192980 MB

node 3 free: 192173 MB

node distances:

node 0 1 2 3

0: 10 12 12 12

1: 12 10 12 12

2: 12 12 10 12

3: 12 12 12 10

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2190V3 (AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1260

SPECrate®2017\_fp\_peak = 1390

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

## Platform Notes (Continued)

9. /proc/meminfo  
MemTotal: 791404356 kB

10. who -r  
run-level 3 Apr 17 20:26

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)  
Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled apparmor audited cron firewalld getty@ irqbalance issue-generator kbdsettings kdump  
kdump-early kdump-notify nvmefc-boot-connections nvmf-autoconnect postfix purge-kernels  
rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6  
wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebttables  
exchange-bmc-os-info fsidd grub2-once haveged hwloc-dump-hwdata ipmievfd issue-add-ssh-keys  
kexec-load nfs nfs-blkmap rpcbind rpmconfigcheck serial-getty@  
systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext  
systemd-time-wait-sync systemd-timesyncd tuned  
generated jexec  
indirect systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default  
root=UUID=57526b2a-7733-4c34-8e82-bd01bcfc67e9  
splash=silent  
mitigations=auto  
quiet  
security=apparmor  
crashkernel=383M,high  
crashkernel=72M,low

14. cpupower frequency-info  
analyzing CPU 256:  
current policy: frequency should be within 1.50 GHz and 2.25 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes

15. tuned-adm active  
It seems that tuned daemon is not running, preset profile is not activated.  
Preset profile: throughput-performance

16. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 0

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2190V3 (AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1260

SPECrate®2017\_fp\_peak = 1390

CPU2017 License: 6865

Test Date: Apr-2025

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2025

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Oct-2024

## Platform Notes (Continued)

```
vm.compaction_proactiveness          20
vm.dirty_background_bytes            0
vm.dirty_background_ratio           10
vm.dirty_bytes                      0
vm.dirty_expire_centisecs          3000
vm.dirty_ratio                      8
vm.dirty_writeback_centisecs       500
vm.dirtytime_expire_seconds        43200
vm.extfrag_threshold                500
vm.min_unmapped_ratio              1
vm.nr_hugepages                     0
vm.nr_hugepages_mempolicy          0
vm.nr_overcommit_hugepages         0
vm.swappiness                        1
vm.watermark_boost_factor          15000
vm.watermark_scale_factor          10
vm.zone_reclaim_mode               1

-----
17. /sys/kernel/mm/transparent_hugepage
    defrag      [always] defer defer+madvise madvise never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs   60000
    defrag                  1
    max_ptes_none           511
    max_ptes_shared          256
    max_ptes_swap             64
    pages_to_scan            4096
    scan_sleep_millisecs    10000

-----
19. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP6

-----
20. Disk information
    SPEC is set to: /home/CPU2017
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/nvme0n1p3  xfs   854G  67G  787G  8%  /home

-----
21. /sys/devices/virtual/dmi/id
    Vendor:      KAYTUS
    Product:     KR2190-E3-A0-R0-00
    Product Family: Not specified
    Serial:      0123456789

-----
22. dmidecode
    Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2190V3 (AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1260

SPECrate®2017\_fp\_peak = 1390

CPU2017 License: 6865

Test Date: Apr-2025

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2025

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Oct-2024

## Platform Notes (Continued)

12x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400

-----  
23. BIOS

(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 01.09.00  
BIOS Date: 03/13/2025

## Compiler Version Notes

=====

C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

=====

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

=====

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

=====

C++, C, Fortran | 507.cactusBSSN\_r(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2190V3 (AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1260

SPECrate®2017\_fp\_peak = 1390

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

## Compiler Version Notes (Continued)

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2190V3 (AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1260

SPECrate®2017\_fp\_peak = 1390

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

## Base Portability Flags (Continued)

```
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2190V3 (AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1260

SPECrate®2017\_fp\_peak = 1390

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017\_fp\_base = 1260

KR2190V3 (AMD EPYC 9965)

SPECrate®2017\_fp\_peak = 1390

CPU2017 License: 6865

Test Date: Apr-2025

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2025

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Oct-2024

## Base Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2190V3 (AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1260

SPECrate®2017\_fp\_peak = 1390

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

```
519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

538.imagick\_r: Same as 519.lbm\_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand  
-fenable-aggressive-gather -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++14  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

```
510.parest_r: -m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-Mrecursive -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm  
-lamdalloc -ldl -lflang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2190V3 (AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1260

SPECrate®2017\_fp\_peak = 1390

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

549.fotonik3d\_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-Mrecursive -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -fvector-transform  
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang

554.roms\_r: Same as 503.bwaves\_r

Benchmarks using both Fortran and C:

521.wrf\_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc  
-ldl -lflang

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

511.povray\_r: -m64 -std=c++14  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false  
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt  
-mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm  
-lamdalloc -ldl

526.blender\_r: -m64 -std=c++14  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2190V3 (AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1260

SPECrate®2017\_fp\_peak = 1390

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Apr-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

526.blender\_r (continued):

```
-mllvm -reduce-array-computations=3 -zopt  
-mllvm -unroll-threshold=100 -lamdlibm -lamdaloc -ldl
```

Benchmarks using Fortran, C, and C++:

```
507.cactuBSSN_r: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.html>

<http://www.spec.org/cpu2017/flags/Kaytus-Platform-Settings-amd-V1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.xml>

<http://www.spec.org/cpu2017/flags/Kaytus-Platform-Settings-amd-V1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-04-21 00:54:34-0400.

Report generated on 2025-06-17 18:12:01 by CPU2017 PDF formatter v6716.

Originally published on 2025-06-17.