



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(2.70 GHz, Intel Xeon 6353P)

SPECrate®2017\_fp\_base = 98.1

SPECrate®2017\_fp\_peak = 99.0

CPU2017 License: 9017


Test Date: May-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2025

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

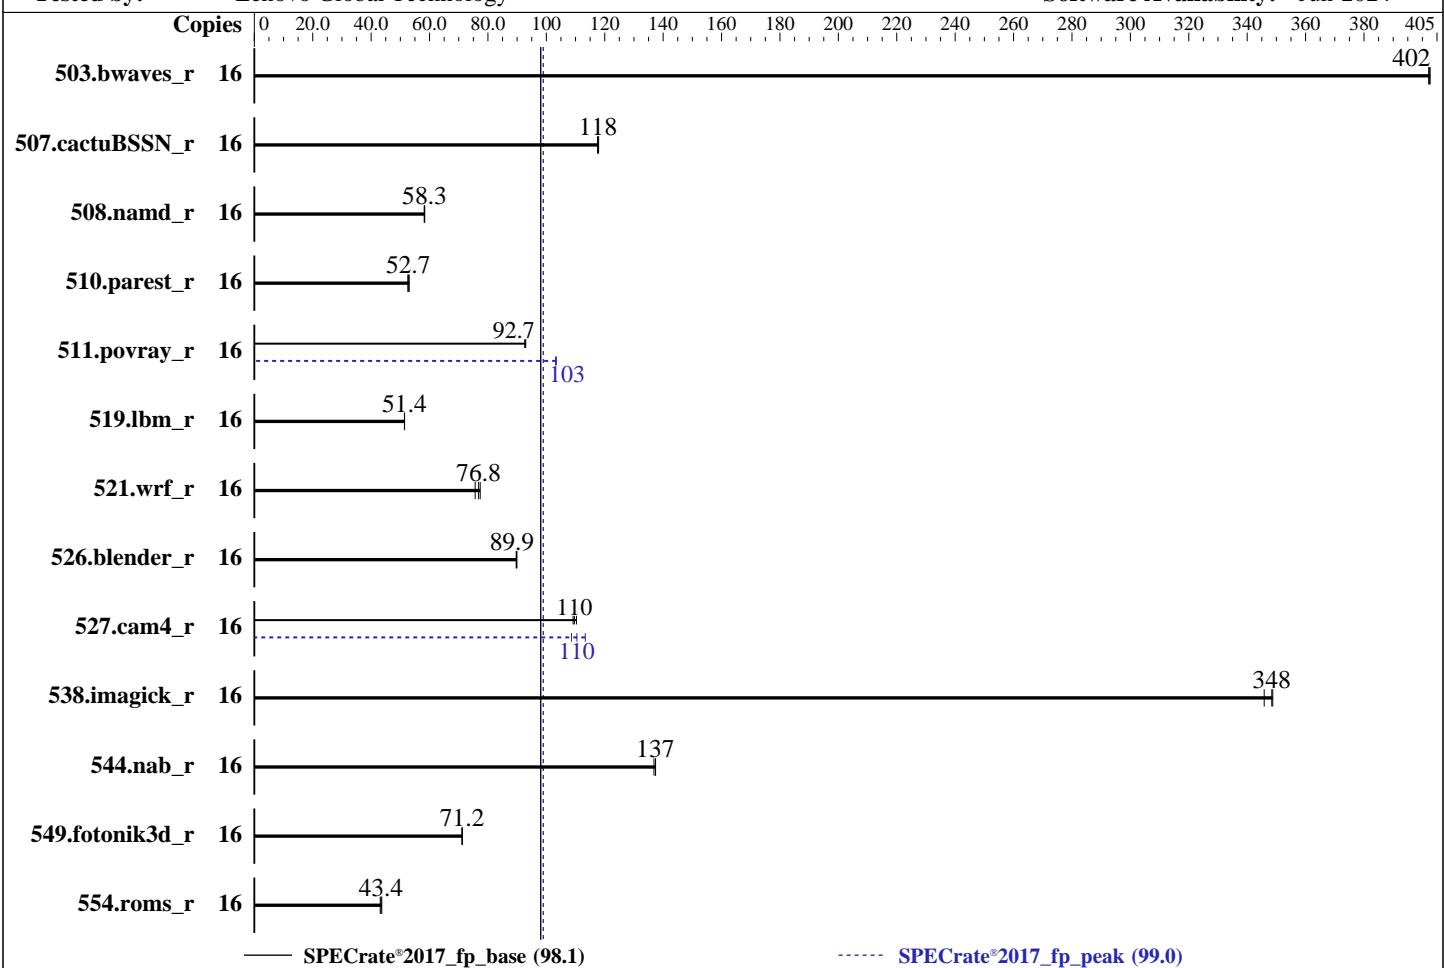

### Hardware

CPU Name: Intel Xeon 6353P  
 Max MHz: 5400  
 Nominal: 2700  
 Enabled: 8 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 24 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (2 x 32 GB 2Rx8 PC5-5600B-E, running at 4400)  
 Storage: 1 x 1.92 TB SATA SSD  
 Other: CPU Cooling: Air

OS:

SUSE Linux Enterprise Server 15 SP6

Compiler:

Kernel 6.4.0-150600.21-default

Parallel:

C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;

Firmware:

Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;

File System:

No

System State:

Lenovo BIOS Version CTE119B 7.10 released Feb-2025

Base Pointers:

xfs

Peak Pointers:

Run level 3 (multi-user)

Other:

64-bit

Power Management:

64-bit

### Software

jemalloc memory allocator V5.0.1

BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(2.70 GHz, Intel Xeon 6353P)

SPECrate®2017\_fp\_base = 98.1

SPECrate®2017\_fp\_peak = 99.0

CPU2017 License: 9017

Test Date: May-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2025

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	16	399	402	399	403	<b>399</b>	<b>402</b>	16	399	402	399	403	<b>399</b>	<b>402</b>
507.cactuBSSN_r	16	172	118	172	118	<b>172</b>	<b>118</b>	16	172	118	172	118	<b>172</b>	<b>118</b>
508.namd_r	16	261	58.2	<b>261</b>	<b>58.3</b>	261	58.3	16	261	58.2	<b>261</b>	<b>58.3</b>	261	58.3
510.parest_r	16	<b>794</b>	<b>52.7</b>	796	52.6	789	53.0	16	<b>794</b>	<b>52.7</b>	796	52.6	789	53.0
511.povray_r	16	402	92.9	403	92.6	<b>403</b>	<b>92.7</b>	16	<b>362</b>	<b>103</b>	362	103	361	103
519.lbm_r	16	328	51.4	328	51.5	<b>328</b>	<b>51.4</b>	16	328	51.4	328	51.5	<b>328</b>	<b>51.4</b>
521.wrf_r	16	463	77.4	474	75.6	<b>467</b>	<b>76.8</b>	16	463	77.4	474	75.6	<b>467</b>	<b>76.8</b>
526.blender_r	16	<b>271</b>	<b>89.9</b>	272	89.7	271	89.9	16	<b>271</b>	<b>89.9</b>	272	89.7	271	89.9
527.cam4_r	16	254	110	<b>255</b>	<b>110</b>	256	109	16	247	113	258	109	<b>253</b>	<b>110</b>
538.imagick_r	16	114	349	<b>114</b>	<b>348</b>	115	346	16	114	349	<b>114</b>	<b>348</b>	115	346
544.nab_r	16	196	137	<b>196</b>	<b>137</b>	197	137	16	196	137	<b>196</b>	<b>137</b>	197	137
549.fotonik3d_r	16	<b>876</b>	<b>71.2</b>	876	71.2	876	71.1	16	<b>876</b>	<b>71.2</b>	876	71.2	876	71.1
554.roms_r	16	590	43.1	583	43.6	<b>586</b>	<b>43.4</b>	16	590	43.1	583	43.6	<b>586</b>	<b>43.4</b>

SPECrate®2017\_fp\_base = 98.1

SPECrate®2017\_fp\_peak = 99.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor.  
For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.1.9-ic2024.1/lib/intel64:/home/cpu2017-1.1.9-ic2024.1/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(2.70 GHz, Intel Xeon 6353P)

SPECrate®2017\_fp\_base = 98.1

SPECrate®2017\_fp\_peak = 99.0

CPU2017 License: 9017

Test Date: May-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2025

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

### General Notes (Continued)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
CPU P-state Control set to Legacy

```
Sysinfo program /home/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu May 8 21:56:20 2025
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----

1. uname -a  
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT\_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)  
x86\_64 x86\_64 x86\_64 GNU/Linux

-----

2. w  
21:56:20 up 2 min, 1 user, load average: 0.00, 0.00, 0.00  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

-----

3. Username  
From environment variable \$USER: root

-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(2.70 GHz, Intel Xeon 6353P)

SPECrate®2017\_fp\_base = 98.1

SPECrate®2017\_fp\_peak = 99.0

CPU2017 License: 9017

Test Date: May-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2025

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

## Platform Notes (Continued)

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 256757
max locked memory        (kbytes, -l) 8192
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority        (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 256757
virtual memory             (kbytes, -v) unlimited
file locks               (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECcpu_1.02.sh
sh Run306-compliant-ic2024.1-lin-core-avx2-ratefp-smt-on-20240308.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=16 -c
  ic2024.1-lin-core-avx2-rate-20240308.cfg --define smt-on --define cores=8 --define physicallogical
  --define no-numa --tune base,peak -o all --define drop_caches fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=16 --configfile
  ic2024.1-lin-core-avx2-rate-20240308.cfg --define smt-on --define cores=8 --define physicallogical
  --define no-numa --tune base,peak --output_format all --define drop_caches --nopower --runmode rate --tune
  base:peak --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.145/templogs/preenv.fprate.145.0.log --lognum 145.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.1
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6353P
vendor_id       : GenuineIntel
cpu family      : 6
model          : 183
stepping        : 1
microcode       : 0x12c
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrp_bhi
cpu cores       : 8
siblings        : 16
1 physical ids (chips)
16 processors (hardware threads)
physical id 0: core ids 0-7
physical id 0: apicids 0-15
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
7. lscpu
```

From lscpu from util-linux 2.39.3:
Architecture: x86\_64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(2.70 GHz, Intel Xeon 6353P)

SPECrate®2017\_fp\_base = 98.1

SPECrate®2017\_fp\_peak = 99.0

CPU2017 License: 9017

Test Date: May-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2025

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

## Platform Notes (Continued)

CPU op-mode(s):	32-bit, 64-bit
Address sizes:	42 bits physical, 48 bits virtual
Byte Order:	Little Endian
CPU(s):	16
On-line CPU(s) list:	0-15
Vendor ID:	GenuineIntel
BIOS Vendor ID:	Intel(R) Corporation
Model name:	Intel(R) Xeon(R) 6353P
BIOS Model name:	Intel(R) Xeon(R) 6353P none CPU @ 4.6GHz
BIOS CPU family:	179
CPU family:	6
Model:	183
Thread(s) per core:	2
Core(s) per socket:	8
Socket(s):	1
Stepping:	1
Frequency boost:	enabled
CPU(s) scaling MHz:	42%
CPU max MHz:	2701.0000
CPU min MHz:	800.0000
BogoMIPS:	5376.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperf mperf tsc_known_freq pnpi pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbe fma cx16 xtpr pdcm sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb ssbd ibrs ibpb stibp ibrs Enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsave arch_capabilities
Virtualization:	VT-x
L1d cache:	384 KiB (8 instances)
L1i cache:	256 KiB (8 instances)
L2 cache:	16 MiB (8 instances)
L3 cache:	24 MiB (1 instance)
NUMA node(s):	1
NUMA node0 CPU(s):	0-15
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSB-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME ONE-SIZE ALL-SIZE WAYS TYPE

LEVEL SETS PHY-LINE COHERENCY-SIZE

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(2.70 GHz, Intel Xeon 6353P)

SPECrate®2017\_fp\_base = 98.1

SPECrate®2017\_fp\_peak = 99.0

CPU2017 License: 9017

Test Date: May-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2025

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

### Platform Notes (Continued)

L1d	48K	384K	12 Data	1	64	1	64
L1i	32K	256K	8 Instruction	1	64	1	64
L2	2M	16M	16 Unified	2	2048	1	64
L3	24M	24M	12 Unified	3	32768	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.  
available: 1 nodes (0)  
node 0 cpus: 0-15  
node 0 size: 64215 MB  
node 0 free: 63590 MB  
node distances:  
node 0  
0: 10

-----  
9. /proc/meminfo

MemTotal: 65756820 kB

-----  
10. who -r  
run-level 3 May 8 21:53

-----  
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status  
multi-user running

-----  
12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog sapconf smartd sshd sysctl-logger systemd-pstore wickedd wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronynd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd sysstat systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd vncserver@
generated	ntp_sync
indirect	systemd-userdbd uuidd wickedd

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default  
root=UUID=7e796fe7-28c4-4333-a373-9a601de44c3e  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

-----  
14. cpupower frequency-info

analyzing CPU 15:  
current policy: frequency should be within 800 MHz and 2.70 GHz.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(2.70 GHz, Intel Xeon 6353P)

SPECrate®2017\_fp\_base = 98.1

SPECrate®2017\_fp\_peak = 99.0

CPU2017 License: 9017

Test Date: May-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2025

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

## Platform Notes (Continued)

The governor "ondemand" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

-----  
15. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

-----  
16. /sys/kernel/mm/transparent\_hugepage

defrag	always defer defer+madvise [madvise] never
enabled	[always] madvise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

-----  
17. /sys/kernel/mm/transparent\_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

-----  
18. OS release

From /etc/*-release	/etc/*-version
os-release	SUSE Linux Enterprise Server 15 SP6

-----  
19. Disk information

SPEC is set to: /home/cpu2017-1.1.9-ic2024.1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb3	xfs	1.8T	65G	1.7T	4%	/

-----  
20. /sys/devices/virtual/dmi/id

Vendor	Lenovo
Product	ThinkSystem ST250 V3

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(2.70 GHz, Intel Xeon 6353P)

SPECrate®2017\_fp\_base = 98.1

SPECrate®2017\_fp\_peak = 99.0

CPU2017 License: 9017

Test Date: May-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2025

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

## Platform Notes (Continued)

Product Family: ThinkSystem  
Serial: 1234567890

-----  
21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x SK Hynix HMCG88AGBEA084N 32 GB 2 rank 5600, configured at 4400

-----  
22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo  
BIOS Version: CTE119B-7.10  
BIOS Date: 02/20/2025  
BIOS Revision: 7.10  
Firmware Revision: 6.10

## Compiler Version Notes

=====

C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactusBSSN\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(2.70 GHz, Intel Xeon 6353P)

SPECrate®2017\_fp\_base = 98.1

SPECrate®2017\_fp\_peak = 99.0

CPU2017 License: 9017

Test Date: May-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2025

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

## Compiler Version Notes (Continued)

Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(2.70 GHz, Intel Xeon 6353P)

SPECrate®2017\_fp\_base = 98.1

SPECrate®2017\_fp\_peak = 99.0

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## Base Portability Flags (Continued)

538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(2.70 GHz, Intel Xeon 6353P)

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECrate®2017\_fp\_base = 98.1

SPECrate®2017\_fp\_peak = 99.0

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: basepeak = yes

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(2.70 GHz, Intel Xeon 6353P)

SPECrate®2017\_fp\_base = 98.1

SPECrate®2017\_fp\_peak = 99.0

CPU2017 License: 9017

Test Date: May-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2025

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

## Peak Optimization Flags (Continued)

549.fotonik3d\_r: basepeak = yes

554.roms\_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int  
-nostandard-realloc-lhs -align array32byte -auto  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray\_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.propdata(pass 2) -xCORE-AVX2 -flto  
-Ofast -ffast-math -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Catlow-A.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Catlow-A.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-05-08 09:56:19-0400.

Report generated on 2025-06-03 15:45:25 by CPU2017 PDF formatter v6716.

Originally published on 2025-06-03.