



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9655)

SPECspeed®2017_fp_base = 413

SPECspeed®2017_fp_peak = 418

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: May-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

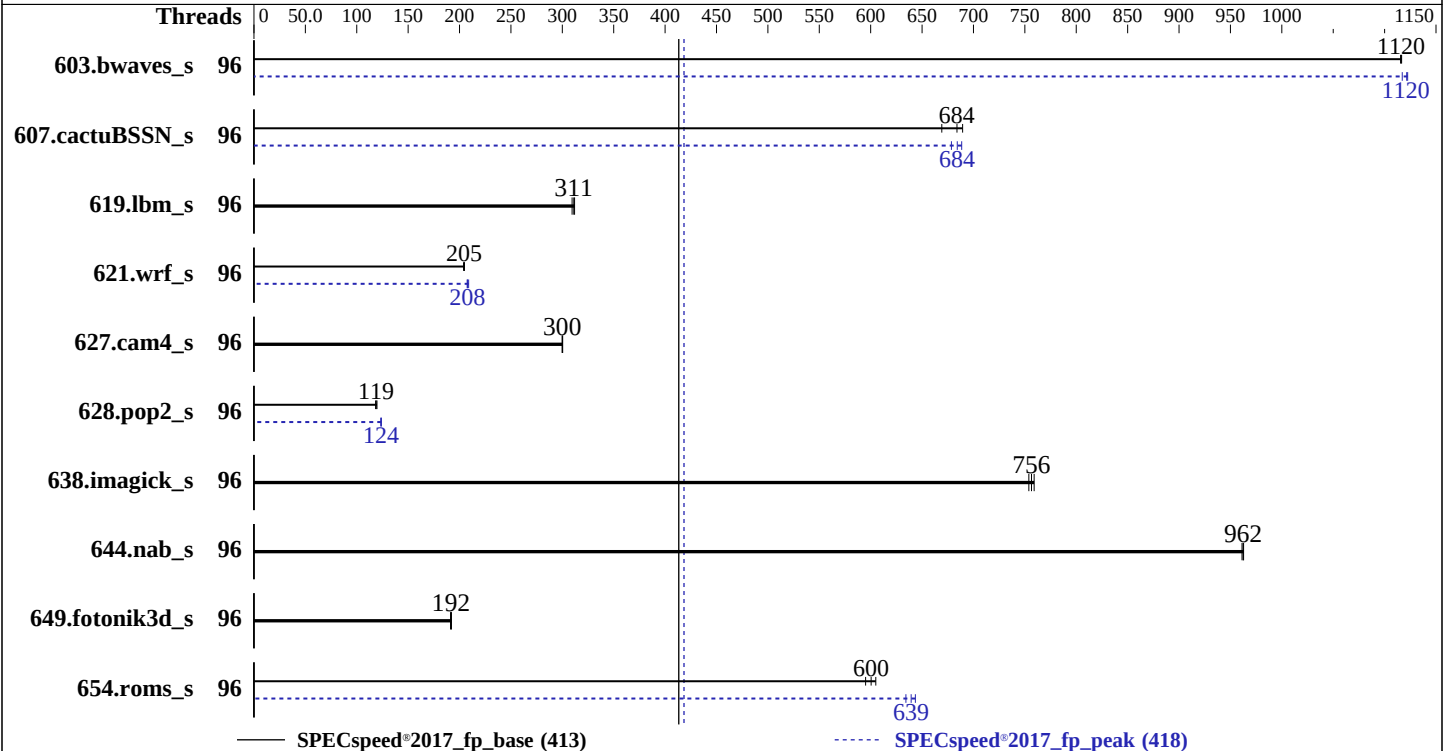

Hardware

CPU Name: AMD EPYC 9655
Max MHz: 4500
Nominal: 2600
Enabled: 96 cores, 1 chip
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other: None
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 1 x 1.6 TB PCIe NVMe SSD
Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04 LTS
6.8.0-38-generic
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: Version 00.13.01.05 released Feb-2025
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9655)

SPECspeed®2017_fp_base = 413

SPECspeed®2017_fp_peak = 418

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	96	<u>52.9</u>	<u>1120</u>	52.9	1120	52.8	1120	96	52.6	1120	52.8	1120	<u>52.6</u>	<u>1120</u>
607.cactuBSSN_s	96	<u>24.4</u>	<u>684</u>	24.2	689	24.9	669	96	<u>24.4</u>	<u>684</u>	24.6	679	24.2	689
619.lbm_s	96	<u>16.8</u>	<u>311</u>	16.9	310	16.8	312	96	<u>16.8</u>	<u>311</u>	16.9	310	16.8	312
621.wrf_s	96	64.6	205	<u>64.6</u>	<u>205</u>	64.9	204	96	63.3	209	63.7	207	<u>63.7</u>	<u>208</u>
627.cam4_s	96	29.6	300	<u>29.5</u>	<u>300</u>	29.5	300	96	29.6	300	<u>29.5</u>	<u>300</u>	29.5	300
628.pop2_s	96	99.2	120	100	118	<u>99.8</u>	<u>119</u>	96	95.9	124	<u>96.0</u>	<u>124</u>	96.2	123
638.imagick_s	96	<u>19.1</u>	<u>756</u>	19.1	754	19.0	759	96	<u>19.1</u>	<u>756</u>	19.1	754	19.0	759
644.nab_s	96	18.1	963	<u>18.2</u>	<u>962</u>	18.2	961	96	18.1	963	<u>18.2</u>	<u>962</u>	18.2	961
649.fotonik3d_s	96	<u>47.5</u>	<u>192</u>	47.5	192	47.7	191	96	<u>47.5</u>	<u>192</u>	47.5	192	47.7	191
654.roms_s	96	<u>26.2</u>	<u>600</u>	26.0	605	26.5	595	96	24.5	643	<u>24.6</u>	<u>639</u>	24.8	634

SPECspeed®2017_fp_base = 413

SPECspeed®2017_fp_peak = 418

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
The kernel stops sending timer ticks to CPUs by using "nohz_full=1-95"
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9655)

SPECspeed®2017_fp_base = 413

SPECspeed®2017_fp_peak = 418

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: May-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-95"

LD_LIBRARY_PATH =

"/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "96"

Environment variables set by runcpu during the 603.bwaves_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 621.wrf_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 628.pop2_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 654.roms_s peak run:

GOMP_CPU_AFFINITY = "0-95"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

Determinism Control = Manual

Determinism Enable = Power

TDP Control = Manual

TDP = 500

PPT Control = Manual

PPT = 500

NUMA Nodes Per Socket = NPS2

SMT = Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on 2158hv8 Wed May 7 22:26:24 2025

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9655)

SPECspeed®2017_fp_base = 413

SPECspeed®2017_fp_peak = 418

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: May-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.1)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux 2158hv8 6.8.0-38-generic #38-Ubuntu SMP PREEMPT_DYNAMIC Fri Jun  7 15:25:01 UTC 2024 x86_64 x86_64
x86_64 GNU/Linux
```

```
2. w
22:26:24 up  2:35,  1 user,  load average: 6.57, 5.43, 3.28
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
```

```
3. Username
From environment variable $USER:  root
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            3093889
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
```

```
5. sysinfo process ancestry
/sbin/init
python3 ./run_amd_speed_aocc500_znver5_A1.py
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9655)

SPECspeed®2017_fp_base = 413

SPECspeed®2017_fp_peak = 418

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Platform Notes (Continued)

```
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.030/temlogs/preenv.fpspeed.030.0.log --lognum 030.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9655 96-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb00211e
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 192 4K pages
cpu cores      : 96
siblings       : 96
1 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	96
On-line CPU(s) list:	0-95
Vendor ID:	AuthenticAMD
BIOS Vendor ID:	Advanced Micro Devices, Inc.
Model name:	AMD EPYC 9655 96-Core Processor
BIOS Model name:	AMD EPYC 9655 96-Core Processor Unknown CPU @ 2.6GHz
BIOS CPU family:	107
CPU family:	26
Model:	2
Thread(s) per core:	1
Core(s) per socket:	96
Socket(s):	1
Stepping:	1
Frequency boost:	enabled
CPU(s) scaling MHz:	58%
CPU max MHz:	4509.3750
CPU min MHz:	1500.0000
BogoMIPS:	5192.35
Flags:	fpu_vme_de_pse_tsc_msr_pae_mce_cx8_apic_sep_mtrr_pge_mca_cmov_pat pse36_clflush_mmx_fxsr_sse_sse2_ht_syscall_nx_mmxext_fxsr_opt_pdpe1gb rdtscp_lm_constant_tsc_rep_good_amd_lbr_v2_nopl_nonstop_tsc_cpuid extd_apicid_aperfmpperf_rapl_pni_pclmuldq_monitor_ssse3_fma_cx16_pcid sse4_1_sse4_2_x2apic_movbe_popcnt_aes_xsave_avx_f16c_rdrand_lahf_lm cmp_legacy_extapic_cr8_legacy_abm_sse4a_misalignsse_3dnowprefetch osvw_ibs_skinit_wdt_tce_topoext_perfctr_core_perfctr_nb_bpext

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9655)

SPECspeed®2017_fp_base = 413

SPECspeed®2017_fp_peak = 418

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: May-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_l1d debug_swap

L1d cache: 4.5 MiB (96 instances)
L1i cache: 3 MiB (96 instances)
L2 cache: 96 MiB (96 instances)
L3 cache: 384 MiB (12 instances)

NUMA node(s): 2
NUMA node0 CPU(s): 0-47
NUMA node1 CPU(s): 48-95

Vulnerability Gather data sampling: Not affected

Vulnerability Itlb multihit: Not affected

Vulnerability L1tf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Mmio stale data: Not affected

Vulnerability Reg file data sampling: Not affected

Vulnerability Retbleed: Not affected

Vulnerability Spec rstack overflow: Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization

Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	1M	96M	16	Unified	2	1024	1	64
L3	32M	384M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-47

node 0 size: 386548 MB

node 0 free: 385433 MB

node 1 cpus: 48-95

node 1 size: 386994 MB

node 1 free: 378090 MB

node distances:

node 0 1

0: 10 12

1: 12 10

9. /proc/meminfo

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9655)

SPECspeed®2017_fp_base = 413

SPECspeed®2017_fp_peak = 418

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Platform Notes (Continued)

MemTotal: 792108228 kB

10. who -r
run-level 5 May 7 19:53

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.1)
Default Target Status
graphical degraded

12. Failed units, from systemctl list-units --state=failed
UNIT LOAD ACTIVE SUB DESCRIPTION
* fwupd-refresh.service loaded failed failed Refresh fwupd metadata and update motd
* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured
Legend: LOAD -> Reflects whether the unit definition was properly loaded.
ACTIVE -> The high-level unit activation state, i.e. generalization of SUB.
SUB -> The low-level unit activation state, values depend on unit type.
2 loaded units listed.

13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online apparmor
apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup
cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback
keyboard-setup lvm2-monitor multipathd networkd-dispatcher networking open-iscsi
open-vm-tools pollinate rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd
systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald
ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth wpa_supplicant
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell ifupdown-wait-online iscsid nftables rsync serial-getty@ ssh
systemd-boot-check-no-failures systemd-confext systemd-network-generator
systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysex
systemd-time-wait-sync upower wpa_supplicant-nl80211@ wpa_supplicant-wired@
wpa_supplicant@
indirect systemd-sysupdate systemd-sysupdate-reboot uuid
masked cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/vmlinuz-6.8.0-38-generic
root=/dev/mapper/ubuntu--vg-ubuntu--lv
ro
nohz_full=1-95

15. cpupower frequency-info
analyzing CPU 55:
current policy: frequency should be within 1.50 GHz and 2.60 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9655)

SPECspeed®2017_fp_base = 413

SPECspeed®2017_fp_peak = 418

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Platform Notes (Continued)

Pstate-P0: 800MHZ

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

17. /sys/kernel/mm/transparent_hugepage

defrag	[always]	defer	defer+madvise	madvise	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

19. OS release

From /etc/*-release /etc/*-version
os-release Ubuntu 24.04 LTS

20. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv	ext4	196G	17G	170G	9%	/

21. /sys/devices/virtual/dmi/id

Product: 2158H V8
Product Family: Turin

22. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9655)

SPECspeed®2017_fp_base = 413

SPECspeed®2017_fp_peak = 418

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Platform Notes (Continued)

The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x SK Hynix HMC94AHBRA485N 64 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 00.13.01.05
BIOS Date: 02/10/2025
BIOS Revision: 1.5

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9655)

SPECspeed®2017_fp_base = 413

SPECspeed®2017_fp_peak = 418

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Compiler Version Notes (Continued)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9655)

SPECspeed®2017_fp_base = 413

SPECspeed®2017_fp_peak = 418

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Base Optimization Flags (Continued)

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=2000000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9655)

SPECspeed®2017_fp_base = 413

SPECspeed®2017_fp_peak = 418

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: May-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP

-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math

-fopenmp -fscalar-transform -fvector-transform

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9655)

SPECspeed®2017_fp_base = 413

SPECspeed®2017_fp_peak = 418

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: May-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

603.bwaves_s (continued):

-mllvm -reduce-array-computations=3 -Mrecursive
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

649.fotonik3d_s: basepeak = yes

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

627.cam4_s: basepeak = yes

628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fscalar-transform
-fvector-transform -Mrecursive -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP
-fremap-arrays -fstrip-mining -fstruct-layout=9
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9655)

SPECspeed®2017_fp_base = 413

SPECspeed®2017_fp_peak = 418

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.5.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.5.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-05-07 18:26:23-0400.

Report generated on 2025-06-03 15:46:06 by CPU2017 PDF formatter v6716.

Originally published on 2025-06-03.