



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9575F
3.30 GHz Processor)

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = 1730

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

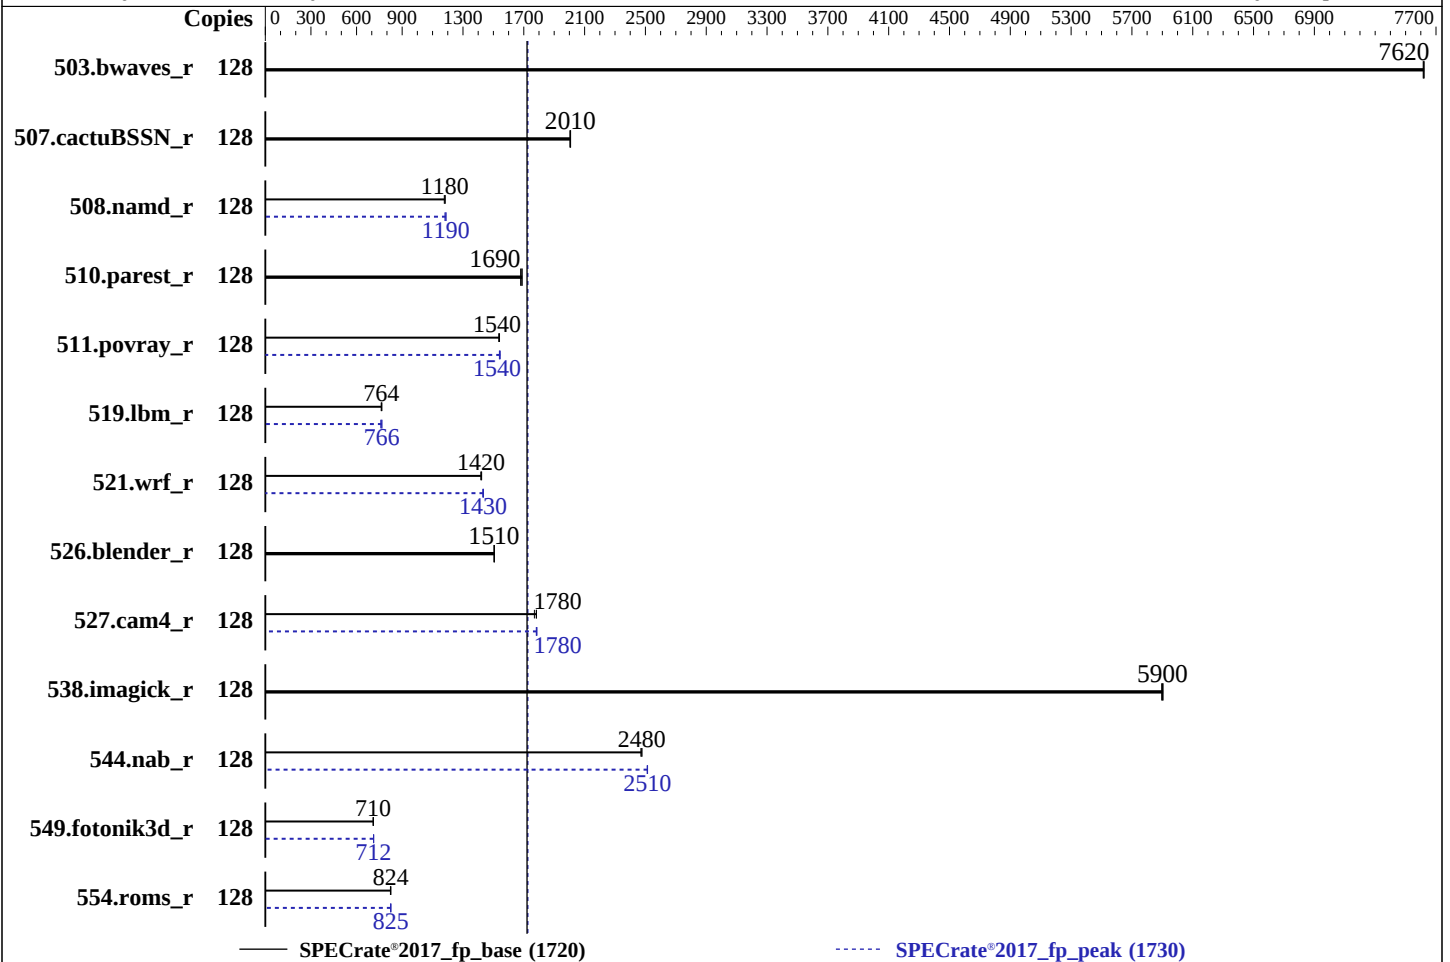

Hardware

CPU Name: AMD EPYC 9575F
Max MHz: 5000
Nominal: 3300
Enabled: 128 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores
Other: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R, running at 6000)
Storage: 1 x 960 GB SATA SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
kernel version 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Version 4.3.5c released Dec-2024
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9575F
3.30 GHz Processor)

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = 1730

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	168	7620	168	7620	169	7620	128	168	7620	168	7620	169	7620
507.cactuBSSN_r	128	80.8	2010	80.7	2010	80.9	2000	128	80.8	2010	80.7	2010	80.9	2000
508.namd_r	128	103	1180	103	1180	103	1180	128	102	1190	103	1180	102	1190
510.parest_r	128	199	1690	199	1680	198	1690	128	199	1690	199	1680	198	1690
511.povray_r	128	194	1540	195	1540	194	1540	128	193	1550	194	1540	194	1540
519.lbm_r	128	177	762	176	767	177	764	128	176	766	176	767	178	759
521.wrf_r	128	202	1420	202	1420	202	1420	128	200	1430	200	1430	200	1430
526.blender_r	128	129	1510	130	1510	130	1500	128	129	1510	130	1510	130	1500
527.cam4_r	128	126	1780	126	1780	127	1770	128	126	1780	125	1780	125	1790
538.imagick_r	128	53.9	5900	53.9	5910	54.0	5900	128	53.9	5900	53.9	5910	54.0	5900
544.nab_r	128	87.0	2480	87.0	2480	87.2	2470	128	85.8	2510	85.7	2510	85.7	2510
549.fotonik3d_r	128	703	710	702	711	703	710	128	700	712	701	712	700	712
554.roms_r	128	247	823	246	826	247	824	128	247	824	246	826	246	825

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = 1730

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9575F
3.30 GHz Processor)

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = 1730

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

NUMA nodes per socket set to NPS4

Determinism Slider set to Power

DF C-States set to Disabled

Enhanced CPU performance set to Auto

SMT Mode set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Tue May 6 17:07:25 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9575F
3.30 GHz Processor)

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = 1730

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Platform Notes (Continued)

```
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
17:07:25 up 7 min, 4 users, load average: 1.59, 7.58, 4.30
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1      -               17:00    21.00s 0.80s  0.08s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 6190686
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 6190686
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py -b fprate
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9575F
3.30 GHz Processor)

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = 1730

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Platform Notes (Continued)

```
6. /proc/cpuinfo
model name      : AMD EPYC 9575F 64-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping        : 1
microcode       : 0xb00211a
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 64
siblings        : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 1: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 1: apicids 128-135,144-151,160-167,176-183,192-199,208-215,224-231,240-247
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Vendor ID:              AuthenticAMD
BIOS Vendor ID:        Advanced Micro Devices, Inc.
Model name:             AMD EPYC 9575F 64-Core Processor
BIOS Model name:        AMD EPYC 9575F 64-Core Processor
BIOS CPU family:        107
CPU family:             26
Model:                  2
Thread(s) per core:     1
Core(s) per socket:     64
Socket(s):              2
Stepping:               1
Frequency boost:        enabled
CPU(s) scaling MHz:     66%
CPU max MHz:            5008.0068
CPU min MHz:            1500.0000
BogoMIPS:               6589.96
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                        pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                        rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                        extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                        sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                        cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                        osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                        perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                        ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                        smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                        xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9575F
3.30 GHz Processor)

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = 1730

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Platform Notes (Continued)

nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_l1d debug_swap

AMD-V

Virtualization:

L1d cache:

L1i cache:

L2 cache:

L3 cache:

NUMA node(s):

NUMA node0 CPU(s):

NUMA node1 CPU(s):

NUMA node2 CPU(s):

NUMA node3 CPU(s):

NUMA node4 CPU(s):

NUMA node5 CPU(s):

NUMA node6 CPU(s):

NUMA node7 CPU(s):

Vulnerability Gather data sampling:

Vulnerability Itlb multihit:

Vulnerability L1tf:

Vulnerability Mds:

Vulnerability Meltdown:

Vulnerability Mmio stale data:

Vulnerability Reg file data sampling:

Vulnerability Retbleed:

Vulnerability Spec rstack overflow:

Vulnerability Spec store bypass:

Vulnerability Spectre v1:

Vulnerability Spectre v2:

6 MiB (128 instances)
4 MiB (128 instances)
128 MiB (128 instances)
512 MiB (16 instances)

8

0-15

16-31

32-47

48-63

64-79

80-95

96-111

112-127

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Mitigation; Speculative Store Bypass disabled via prctl

Mitigation; usercopy/swaps barriers and __user pointer sanitization

Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP

disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected

Not affected

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	16	Unified	2	1024	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-15

node 0 size: 193114 MB

node 0 free: 192398 MB

node 1 cpus: 16-31

node 1 size: 193531 MB

node 1 free: 192794 MB

node 2 cpus: 32-47

node 2 size: 193531 MB

node 2 free: 192588 MB

node 3 cpus: 48-63

node 3 size: 193531 MB

node 3 free: 192843 MB

node 4 cpus: 64-79

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9575F
3.30 GHz Processor)

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = 1730

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Platform Notes (Continued)

```
node 4 size: 193493 MB
node 4 free: 192785 MB
node 5 cpus: 80-95
node 5 size: 193531 MB
node 5 free: 192853 MB
node 6 cpus: 96-111
node 6 size: 193531 MB
node 6 free: 192842 MB
node 7 cpus: 112-127
node 7 size: 193432 MB
node 7 free: 192592 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10
```

```
9. /proc/meminfo
MemTotal:      1584842800 kB
```

```
10. who -r
run-level 3 May 6 16:59
```

```
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target   Status
multi-user       running
```

```
12. Services, from systemctl list-unit-files
STATE      UNIT FILES
enabled    YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance iscsi
           issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
           smartd sshd systemd-pstore virtqemud wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
           wickedd-nanny
enabled-runtime systemd-remount-fs
disabled   autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
           chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info
           firewallld fsidd gpm grub2-once haveged hv_fcopy_daemon hv_kvp_daemon hv_vss_daemon
           hwloc-dump-hwdata ipmi ipmievdt iscsi-init iscsid issue-add-ssh-keys kexec-load ksm
           kvm_stat libvirt-guests lunmask man-db-create multipathd nfs nfs-blkmap nfs-server
           nfsserver rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts
           snmpd snmptrapd strongswan strongswan-starter svnserve systemd-boot-check-no-failures
           systemd-confext systemd-network-generator systemd-nspawn@ systemd-sysext
           systemd-time-wait-sync systemd-timesyncd tcstd udisks2 virtinterfaced virtlockd virtlogd
           virtnetworkd virtnodedevd virtnwfilterd virtsecret d virtstoraged
indirect   pcsd systemd-userdbd tftp wickedd
```

```
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=c83597cb-e37b-43a6-bd1c-58cd7f1f9316
splash=silent
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9575F
3.30 GHz Processor)

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = 1730

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Platform Notes (Continued)

mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info

analyzing CPU 39:

current policy: frequency should be within 1.50 GHz and 3.30 GHz.

The governor "performance" may decide which speed to use
within this range.

boost state support:

Supported: yes

Active: yes

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

16. /sys/kernel/mm/transparent_hugepage

defrag	[always] defer defer+madvise madvise never
enabled	[always] madvise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

18. OS release

From /etc/*-release /etc/*-version

os-release SUSE Linux Enterprise Server 15 SP6

19. Disk information

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9575F
3.30 GHz Processor)

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = 1730

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Platform Notes (Continued)

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	224G	9.1G	211G	5%	/home

20. /sys/devices/virtual/dmi/id

Vendor: Cisco Systems Inc
Product: UCSC-C245-M8SX
Product Family: Cisco UCS Rack Server
Serial: WZP2750Z0CS

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

22x 0xCE00 M321R8GA0PB2-CCPEC 64 GB 2 rank 6400, configured at 6000
1x 0xCE00 M321R8GA0PB2-CCPKC 64 GB 2 rank 6400, configured at 6000
1x 0xCE00 M321R8GA0PB2-CCPPC 64 GB 2 rank 6400, configured at 6000

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Cisco Systems, Inc.
BIOS Version: C245M8.4.3.5c.0.1202241033
BIOS Date: 12/02/2024
BIOS Revision: 5.35

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9575F
3.30 GHz Processor)

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = 1730

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9575F
3.30 GHz Processor)

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = 1730

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9575F
3.30 GHz Processor)

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = 1730

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc  
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang  
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9575F
3.30 GHz Processor)

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = 1730

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9575F
3.30 GHz Processor)

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = 1730

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

538.imagick_r: basepeak = yes

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9575F
3.30 GHz Processor)

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = 1730

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Peak Optimization Flags (Continued)

508.namd_r (continued):

-lamdalloc -ldl

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang

554.roms_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -ldl -lflang

Benchmarks using both Fortran and C:

521.wrf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9575F
3.30 GHz Processor)

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = 1730

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

```
511.povray_r: -m64 -std=c++14
-Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false
-Wl, -mllvm -Wl, -extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=2000000 -lamdlibm
-lamdalloc -ldl
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9575F
3.30 GHz Processor)

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = 1730

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-Turin-v1.1-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-Turin-v1.1-revG.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-05-06 17:07:25-0400.

Report generated on 2025-06-03 15:47:31 by CPU2017 PDF formatter v6716.

Originally published on 2025-06-03.