



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9965

SPECspeed®2017_fp_base = 428

SPECspeed®2017_fp_peak = 433

CPU2017 License: 9066


Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

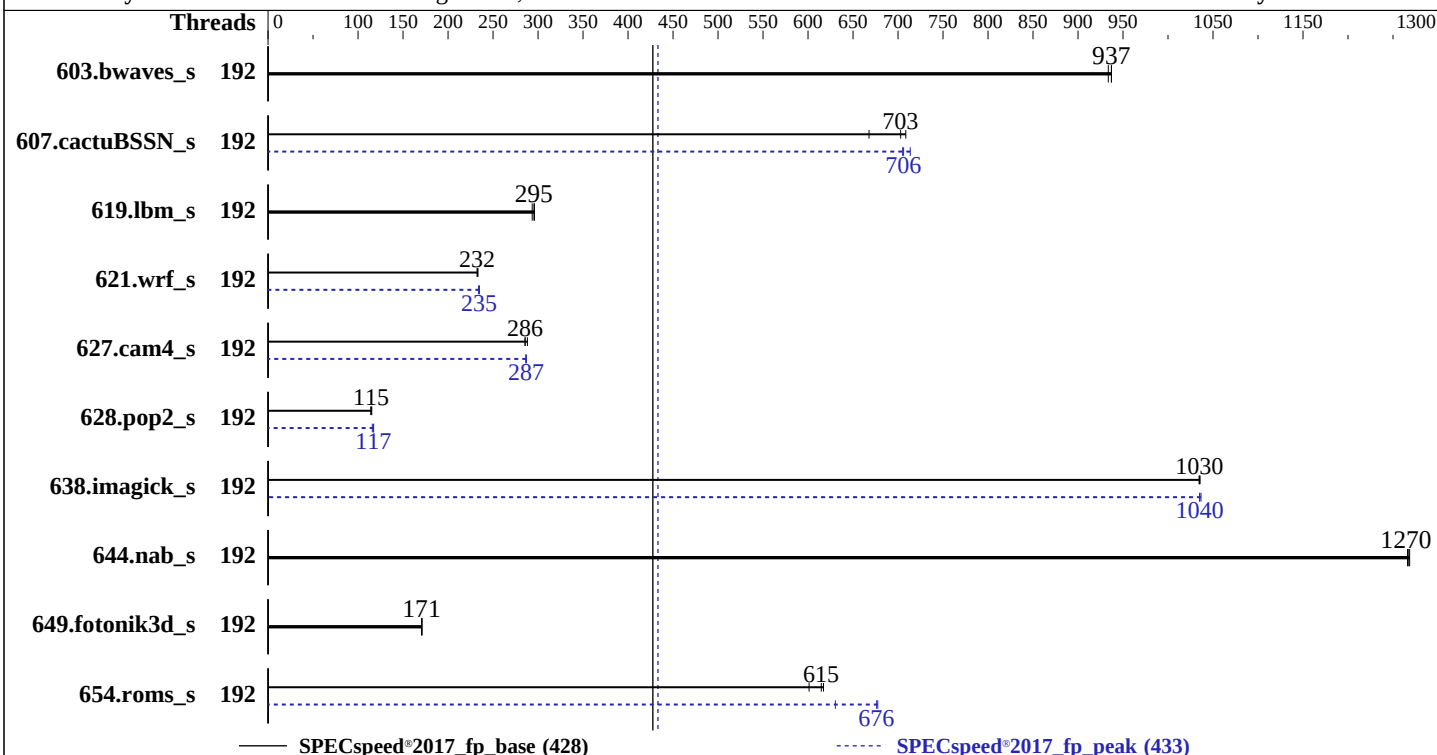

Hardware

CPU Name: AMD EPYC 9965
Max MHz: 3700
Nominal: 2250
Enabled: 192 cores, 1 chip
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 384 MB I+D on chip per chip, 32 MB shared / 16 cores
Other: None
Memory: 384 GB (12 x 32 GB 2Rx4 PC5-6400B-R)
Storage: 1 x 3.84Tb SSD
Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.1 LTS
kernel version 6.8.0-41-generic
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: Version 7.30.09 released Apr-2025
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9965

SPECspeed®2017_fp_base = 428

SPECspeed®2017_fp_peak = 433

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	192	<u>63.0</u>	<u>937</u>	63.2	934	63.0	937	192	<u>63.0</u>	<u>937</u>	63.2	934	63.0	937
607.cactuBSSN_s	192	<u>23.7</u>	<u>703</u>	25.0	668	23.5	709	192	23.6	705	23.4	714	<u>23.6</u>	<u>706</u>
619.lbm_s	192	<u>17.7</u>	<u>295</u>	17.7	296	17.8	294	192	<u>17.7</u>	<u>295</u>	17.7	296	17.8	294
621.wrf_s	192	<u>56.9</u>	<u>232</u>	56.7	233	56.9	232	192	<u>56.4</u>	<u>235</u>	56.5	234	56.3	235
627.cam4_s	192	<u>31.0</u>	<u>286</u>	30.8	288	31.0	285	192	30.9	287	<u>30.9</u>	<u>287</u>	30.9	287
628.pop2_s	192	<u>104</u>	<u>115</u>	103	115	104	114	192	101	117	<u>101</u>	<u>117</u>	103	116
638.imagick_s	192	13.9	1040	13.9	1030	<u>13.9</u>	<u>1030</u>	192	13.9	1040	<u>13.9</u>	<u>1040</u>	13.9	1040
644.nab_s	192	<u>13.8</u>	<u>1270</u>	13.8	1270	13.8	1270	192	<u>13.8</u>	<u>1270</u>	13.8	1270	13.8	1270
649.fotonik3d_s	192	<u>53.4</u>	<u>171</u>	53.3	171	53.4	171	192	<u>53.4</u>	<u>171</u>	53.3	171	53.4	171
654.roms_s	192	25.5	617	26.2	601	<u>25.6</u>	<u>615</u>	192	<u>23.3</u>	<u>676</u>	23.2	678	25.0	630

SPECspeed®2017_fp_base = 428

SPECspeed®2017_fp_peak = 433

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9965

SPECspeed®2017_fp_base = 428

SPECspeed®2017_fp_peak = 433

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-191"

LD_LIBRARY_PATH =

"/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:/usr/local/amd/aocc-compiler-5.0.0/lib:/usr/local/amd/aocc-compiler-5.0.0/lib32"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "192"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:

GOMP_CPU_AFFINITY = "0-191"

Environment variables set by runcpu during the 621.wrf_s peak run:

GOMP_CPU_AFFINITY = "0-191"

Environment variables set by runcpu during the 627.cam4_s peak run:

GOMP_CPU_AFFINITY = "0-191"

Environment variables set by runcpu during the 628.pop2_s peak run:

GOMP_CPU_AFFINITY = "0-191"

Environment variables set by runcpu during the 638.imagick_s peak run:

GOMP_CPU_AFFINITY = "0-191"

Environment variables set by runcpu during the 654.roms_s peak run:

GOMP_CPU_AFFINITY = "0-191"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

SMT Control set to Disabled

SVM Mode set to Disabled

Power Profile Selection set to High Performance Mode

Determinism Slider set to Power

cTDP set to 500

PPT set to 500

NUMA nodes per socket set to NPS 2

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on h3cserver Tue Jul 29 21:55:28 2025

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9965

SPECspeed®2017_fp_base = 428

SPECspeed®2017_fp_peak = 433

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.4)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux h3cserver 6.8.0-41-generic #41-Ubuntu SMP PREEMPT_DYNAMIC Fri Aug  2 20:41:06 UTC 2024 x86_64 x86_64
x86_64 GNU/Linux
```

```
2. w
21:55:28 up 1 min,  3 users,  load average: 3.77, 1.96, 0.74
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1      -               21:54   53.00s  0.07s   ?      -bash
root      -         172.17.21.35    21:55   1:07   0.00s   0.06s  sshd: root@pts/0
root      -         172.17.21.35    21:55   1:07   0.00s   0.06s  sshd: root@notty
```

```
3. Username
From environment variable $USER:  root
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            1545425
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9965

SPECspeed®2017_fp_base = 428

SPECspeed®2017_fp_peak = 433

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```
-----
5. sysinfo process ancestry
/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/0
-bash
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9965 192-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 17
stepping        : 0
microcode       : 0xb101047
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 192
siblings        : 192
1 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-191
physical id 0: apicids 0-191
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

-----
7. lscpu

From lscpu from util-linux 2.39.3:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                192
On-line CPU(s) list:   0-191
Vendor ID:             AuthenticAMD
BIOS Vendor ID:        Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9965 192-Core Processor
BIOS Model name:       AMD EPYC 9965 192-Core Processor
BIOS CPU family:       107
CPU family:            26
Model:                 17
Thread(s) per core:    1
Core(s) per socket:    192
Socket(s):             1
Stepping:              0
Frequency boost:       enabled
CPU(s) scaling MHz:    100%
CPU max MHz:           3700.0000
CPU min MHz:           1200.0000
BogoMIPS:              4493.36

Unknown CPU @ 2.2GHz
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9965

SPECspeed®2017_fp_base = 428

SPECspeed®2017_fp_peak = 433

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

Flags:

fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpeext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd cppc arat npt lbrv svm_lock nrip_save
tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca avx512_vp2intersect
flush_l1d debug_swap

L1d cache:
L1i cache:
L2 cache:
L3 cache:

NUMA node(s):
NUMA node0 CPU(s):
NUMA node1 CPU(s):

Vulnerability Gather data sampling:
Vulnerability Itlb multihit:
Vulnerability L1tf:
Vulnerability Mds:
Vulnerability Meltdown:
Vulnerability Mmio stale data:
Vulnerability Reg file data sampling:
Vulnerability Retbleed:
Vulnerability Spec rstack overflow:
Vulnerability Spec store bypass:
Vulnerability Spectre v1:
Vulnerability Spectre v2:

Vulnerability Srbds:
Vulnerability Tsx async abort:

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	9M	12	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	16	Unified	2	1024	1	64
L3	32M	384M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0-95
node 0 size: 193385 MB
node 0 free: 191962 MB
node 1 cpus: 96-191
node 1 size: 193041 MB
node 1 free: 192006 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9965

SPECspeed®2017_fp_base = 428

SPECspeed®2017_fp_peak = 433

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

node distances:

```
node    0    1
0:    10   12
1:    12   10
```

9. /proc/meminfo
MemTotal: 395701460 kB

10. who -r
run-level 5 Jul 29 21:54

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.4)
Default Target Status
graphical running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online apparmor apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth wpa_supplicant
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell ipmievd iscsid nftables rsync serial-getty@ ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext systemd-time-wait-sync upower wpa_supplicant-nl80211@ wpa_supplicant-wired@
generated	wpa_supplicant@ openipmi
indirect	systemd-sysupdate systemd-sysupdate-reboot uuid
masked	cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/vmlinuz-6.8.0-41-generic
root=/dev/mapper/ubuntu--vg-ubuntu--lv
ro
iommu=pt
amd_pstate=passive

14. cpupower frequency-info
analyzing CPU 77:
current policy: frequency should be within 1.20 GHz and 3.70 GHz.
The governor "performance" may decide which speed to use within this range.
boost state support:
Supported: yes
Active: yes

15. sysctl

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9965

SPECspeed®2017_fp_base = 428

SPECspeed®2017_fp_peak = 433

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```
kernel.numa_balancing      1
kernel.randomize_va_space  0
vm.compaction_proactiveness 20
vm.dirty_background_bytes   0
vm.dirty_background_ratio   10
vm.dirty_bytes              0
vm.dirty_expire_centisecs   3000
vm.dirty_ratio              8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold        500
vm.min_unmapped_ratio       1
vm.nr_hugepages              0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages   0
vm.swappiness                1
vm.watermark_boost_factor    15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode         1
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.1 LTS
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem                                Type  Size  Used Avail Use% Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv ext4  877G   23G   818G   3% /
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:      New H3c Technologies Co., Ltd.
Product:     H3C UniServer R3950 G7
Product Family: Rack
Serial:      210235A56XH255000006
```

```
-----
21. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9965

SPECspeed®2017_fp_base = 428

SPECspeed®2017_fp_peak = 433

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

"DMTF SMBIOS" standard.

Memory:

6x Samsung M321R4GA3EB2-CCPKC 32 GB 2 rank 6400
6x Samsung M321R4GA3PB2-CCPKC 32 GB 2 rank 6400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 7.30.09
BIOS Date: 04/18/2025
BIOS Revision: 5.35
Firmware Revision: 2.2

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9965

SPECspeed®2017_fp_base = 428

SPECspeed®2017_fp_peak = 433

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Compiler Version Notes (Continued)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9965

SPECspeed®2017_fp_base = 428

SPECspeed®2017_fp_peak = 433

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Base Optimization Flags (Continued)

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flt0 -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flt0
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flt0
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=2000000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9965

SPECspeed®2017_fp_base = 428

SPECspeed®2017_fp_peak = 433

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

-march=znver5 -fveclib=AMDLIB -ffast-math -fopenmp

-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining

-fstruct-layout=9 -mllvm -inline-threshold=1000

-mllvm -reduce-array-computations=3

-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp

-lamdlibm -lamdalloc -lflang

644.nab_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9965

SPECspeed®2017_fp_base = 428

SPECspeed®2017_fp_peak = 433

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -fscalar-transform -fvector-transform
-mllvm -reduce-array-computations=3 -Mrecursive
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -Mrecursive
-mrecip=none -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fscalar-transform

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7
AMD EPYC 9965

SPECspeed®2017_fp_base = 428

SPECspeed®2017_fp_peak = 433

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

628.pop2_s (continued):

-fvector-transform -Mrecursive -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP
-fremap-arrays -fstrip-mining -fstruct-layout=9
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V2.0-Turin.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V2.0-Turin.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-07-29 17:55:28-0400.

Report generated on 2025-08-26 17:49:38 by CPU2017 PDF formatter v6716.

Originally published on 2025-08-26.