



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V4
(2.0 GHZ, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2810

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2025

Hardware Availability: Nov-2025

Software Availability: Jun-2025

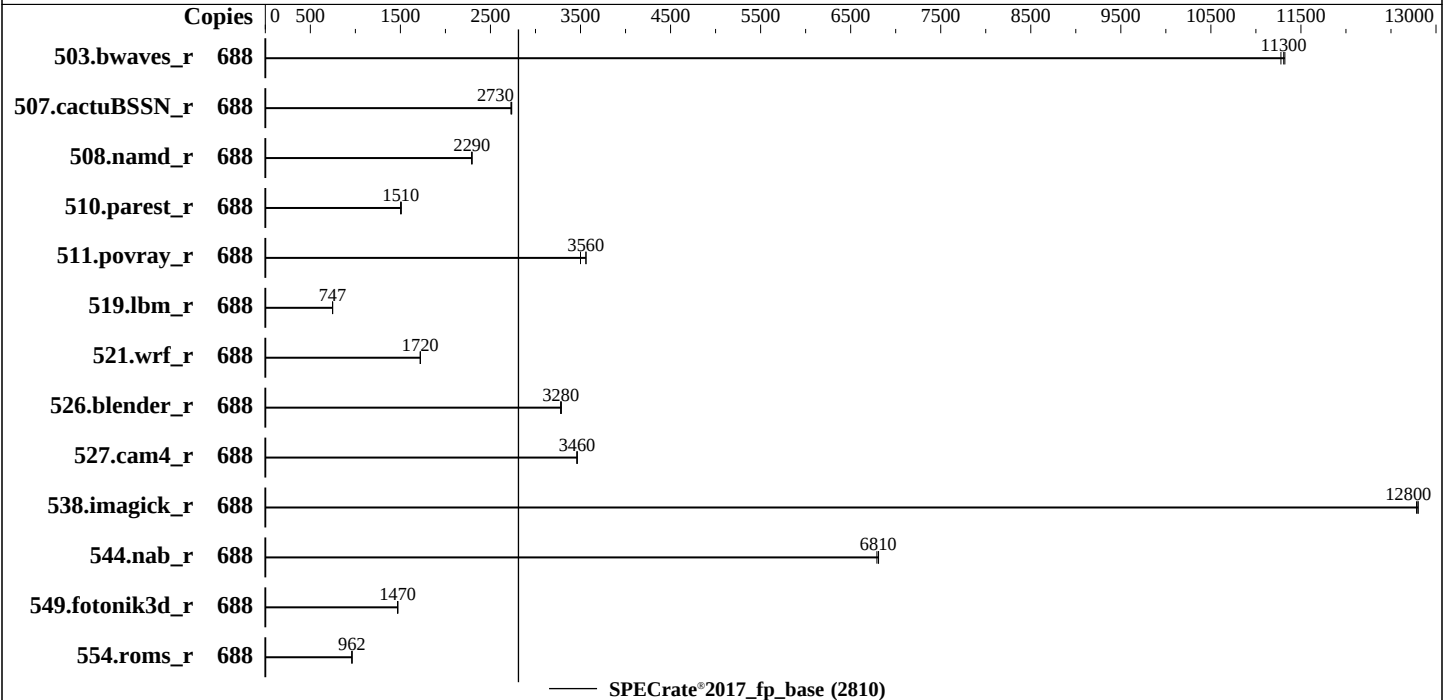

Hardware

CPU Name: Intel Xeon 6788P
Max MHz: 3800
Nominal: 2000
Enabled: 344 cores, 4 chips, 2 threads/core
Orderable: 2,4 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 336 MB I+D on chip per chip
Other: None
Memory: 2 TB (32 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 1 x 960 GB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP7
Kernel 6.4.0-150700.51-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: BIOS Version RVE103X 1.10 released Jul-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V4
(2.0 GHZ, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2810

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2025

Hardware Availability: Nov-2025

Software Availability: Jun-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	688	612	11300	609	11300	610	11300							
507.cactuBSSN_r	688	319	2730	318	2740	319	2730							
508.namd_r	688	285	2290	285	2300	285	2290							
510.parest_r	688	1195	1510	1192	1510	1198	1500							
511.povray_r	688	459	3500	451	3560	451	3560							
519.lbm_r	688	971	747	971	747	971	747							
521.wrf_r	688	895	1720	896	1720	895	1720							
526.blender_r	688	319	3280	319	3280	319	3290							
527.cam4_r	688	347	3460	348	3460	348	3460							
538.imagick_r	688	134	12800	134	12800	134	12800							
544.nab_r	688	170	6810	170	6810	170	6790							
549.fotonik3d_r	688	1827	1470	1823	1470	1822	1470							
554.roms_r	688	1136	962	1137	962	1137	962							

SPECrate®2017_fp_base = 2810

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2024.1/lib/intel64:/home/cpu2017-1.1.9-ic2024.1/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
tuned-adm profile desktop
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V4
(2.0 GHZ, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2810

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2025

Hardware Availability: Nov-2025

Software Availability: Jun-2025

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Workload Profile set to General Computing - Max Performance and then set it to Custom

SNC set to Enabled

UPI Link Disable set to Minimum Number Of Links Enabled

CPU P-state Control set to Cooperative With Legacy

BMC Configuration:

Fan Speed Boost set to High

Sysinfo program /home/cpu2017-1.1.9-ic2024.1/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Wed Aug 6 02:49:22 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

-
1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
-
1. uname -a
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)
x86_64 x86_64 x86_64 GNU/Linux
-

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V4
(2.0 GHZ, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2810

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2025

Hardware Availability: Nov-2025

Software Availability: Jun-2025

Platform Notes (Continued)

2. w

02:49:22 up 4 min, 1 user, load average: 2.50, 7.39, 3.85
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

3. Username

From environment variable \$USER: root

4. ulimit -a

core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 8253528
max locked memory (kbytes, -l) 8192
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 8253528
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECcpu_1.02.sh
sh Run503-compliant-ic2024.1-lin-sapphirerapids-ratefp-base-smt-on-20240308.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=688 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=344 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=688 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=344 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.274/temlogs/preenv.fprate.274.0.log --lognum 274.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.1
```

6. /proc/cpuinfo

model name : Intel(R) Xeon(R) 6788P
vendor_id : GenuineIntel
cpu family : 6
model : 173
stepping : 1
microcode : 0x10003d0
bugs : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores : 86
siblings : 172
4 physical ids (chips)
688 processors (hardware threads)
physical id 0: core ids 0-42,64-106

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V4
(2.0 GHZ, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2810

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2025

Hardware Availability: Nov-2025

Software Availability: Jun-2025

Platform Notes (Continued)

physical id 1: core ids 0-42,64-106
physical id 2: core ids 0-42,64-106
physical id 3: core ids 0-42,64-106
physical id 0: apicids 0-85,128-213
physical id 1: apicids 256-341,384-469
physical id 2: apicids 512-597,640-725
physical id 3: apicids 768-853,896-981

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.4:

```
Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      688
On-line CPU(s) list:        0-687
Vendor ID:                   GenuineIntel
Model name:                  Intel(R) Xeon(R) 6788P
CPU family:                  6
Model:                      173
Thread(s) per core:         2
Core(s) per socket:         86
Socket(s):                   4
Stepping:                    1
CPU(s) scaling MHz:         21%
CPU max MHz:                 3800.0000
CPU min MHz:                 800.0000
BogoMIPS:                   4000.00
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                             pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                             nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                             pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                             xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                             tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                             3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                             ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                             vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                             rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                             intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                             xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                             split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                             arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi
                             umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
                             avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                             cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk
                             pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                             arch_capabilities
Virtualization:              VT-x
L1d cache:                   16.1 MiB (344 instances)
L1i cache:                   21.5 MiB (344 instances)
L2 cache:                    688 MiB (344 instances)
L3 cache:                    1.3 GiB (4 instances)
NUMA node(s):                8
NUMA node0 CPU(s):          0-42,344-386
NUMA node1 CPU(s):          43-85,387-429
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V4
(2.0 GHZ, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2810

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2025

Hardware Availability: Nov-2025

Software Availability: Jun-2025

Platform Notes (Continued)

NUMA node2 CPU(s): 86-128,430-472
NUMA node3 CPU(s): 129-171,473-515
NUMA node4 CPU(s): 172-214,516-558
NUMA node5 CPU(s): 215-257,559-601
NUMA node6 CPU(s): 258-300,602-644
NUMA node7 CPU(s): 301-343,645-687
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRB-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	16.1M	12	Data	1	64	1	64
L1i	64K	21.5M	16	Instruction	1	64	1	64
L2	2M	688M	16	Unified	2	2048	1	64
L3	336M	1.3G	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-42,344-386
node 0 size: 257431 MB
node 0 free: 256236 MB
node 1 cpus: 43-85,387-429
node 1 size: 258025 MB
node 1 free: 257068 MB
node 2 cpus: 86-128,430-472
node 2 size: 257986 MB
node 2 free: 257123 MB
node 3 cpus: 129-171,473-515
node 3 size: 258025 MB
node 3 free: 257169 MB
node 4 cpus: 172-214,516-558
node 4 size: 258025 MB
node 4 free: 257225 MB
node 5 cpus: 215-257,559-601
node 5 size: 258025 MB
node 5 free: 257286 MB
node 6 cpus: 258-300,602-644
node 6 size: 258025 MB
node 6 free: 257345 MB
node 7 cpus: 301-343,645-687
node 7 size: 257865 MB
node 7 free: 257104 MB
node distances:
node 0 1 2 3 4 5 6 7
0: 10 12 21 21 31 31 21 21

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V4
(2.0 GHZ, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2810

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2025

Hardware Availability: Nov-2025

Software Availability: Jun-2025

Platform Notes (Continued)

```
1: 12 10 21 21 31 31 21 21
2: 21 21 10 12 21 21 31 31
3: 21 21 12 10 21 21 31 31
4: 31 31 21 21 10 12 21 21
5: 31 31 21 21 12 10 21 21
6: 21 21 31 31 21 21 10 12
7: 21 21 31 31 21 21 12 10
```

```
-----
9. /proc/meminfo
MemTotal:      2112931232 kB
```

```
-----
10. who -r
run-level 3 Aug 6 02:46
```

```
-----
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
Default Target   Status
multi-user       running
```

```
-----
12. Services, from systemctl list-unit-files
STATE      UNIT FILES
enabled    YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
           kbdsettings klog lvm2-monitor nsd nvme-fc-boot-connections nvmmf-autoconnect postfix
           purge-kernels rollback rsyslog smartd sshd systemd-pstore tuned wicked wickedd-auto4
           wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime  systemd-remount-fs
disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                 chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                 firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
                 kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                 serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                 systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                 systemd-timesyncd
generated       ntp_sync
indirect        systemd-userdbd wickedd
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=046d33f2-f70b-4b84-99e2-9faaacc21c2a
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
-----
14. cpupower frequency-info
analyzing CPU 549:
  current policy: frequency should be within 800 MHz and 3.80 GHz.
                  The governor "powersave" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes
```

```
-----
15. tuned-adm active
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V4
(2.0 GHZ, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2810

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2025

Hardware Availability: Nov-2025

Software Availability: Jun-2025

Platform Notes (Continued)

Current active profile: desktop

16. sysctl

```
kernel.numa_balancing      1
kernel.randomize_va_space  2
vm.compaction_proactiveness 20
vm.dirty_background_bytes   0
vm.dirty_background_ratio   10
vm.dirty_bytes              0
vm.dirty_expire_centisecs   3000
vm.dirty_ratio              20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold        500
vm.min_unmapped_ratio       1
vm.nr_hugepages              0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages   0
vm.swappiness                60
vm.watermark_boost_factor    15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode         0
```

17. /sys/kernel/mm/transparent_hugepage

```
defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

19. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7
```

20. Disk information

```
SPEC is set to: /home/cpu2017-1.1.9-ic2024.1
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p3 xfs 893G 45G 849G 5% /
```

21. /sys/devices/virtual/dmi/id

```
Vendor:      Lenovo
Product:     ThinkSystem SR850 V4
Product Family: ThinkSystem
Serial:      9876543210
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V4
(2.0 GHZ, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2810

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2025

Hardware Availability: Nov-2025

Software Availability: Jun-2025

Platform Notes (Continued)

22. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

18x Samsung M321R8GA0PB1-CCPPC 64 GB 2 rank 6400
1x Samsung M321R8GA0PB1-CCPQC 64 GB 2 rank 6400
11x Samsung M321R8GA0PB1-CCPYC 64 GB 2 rank 6400
2x Samsung M321R8GA0PB2-CCPPC 64 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo
BIOS Version: RVE103X-1.10
BIOS Date: 07/17/2025
BIOS Revision: 1.10
Firmware Revision: 1.40

Compiler Version Notes

=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++ | 508.namd_r(base) 510.parest_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++, C | 511.povray_r(base) 526.blender_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V4
(2.0 GHZ, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2810

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2025

Hardware Availability: Nov-2025

Software Availability: Jun-2025

Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V4
(2.0 GHZ, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2810

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2025

Hardware Availability: Nov-2025

Software Availability: Jun-2025

Base Portability Flags (Continued)

538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V4
(2.0 GHZ, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2810

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2025

Hardware Availability: Nov-2025

Software Availability: Jun-2025

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-F.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-F.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-08-05 14:49:21-0400.

Report generated on 2025-08-26 17:50:20 by CPU2017 PDF formatter v6716.

Originally published on 2025-08-26.