SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12
(2.40 Ghz, Intel Xeon 6768P)

SPECspeed®2017_int_base = 14.0

SPECspeed®2017_int_peak = 14.2

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Sep-2025
Hardware Availability: Jul-2025
Software Availability: Jul-2025

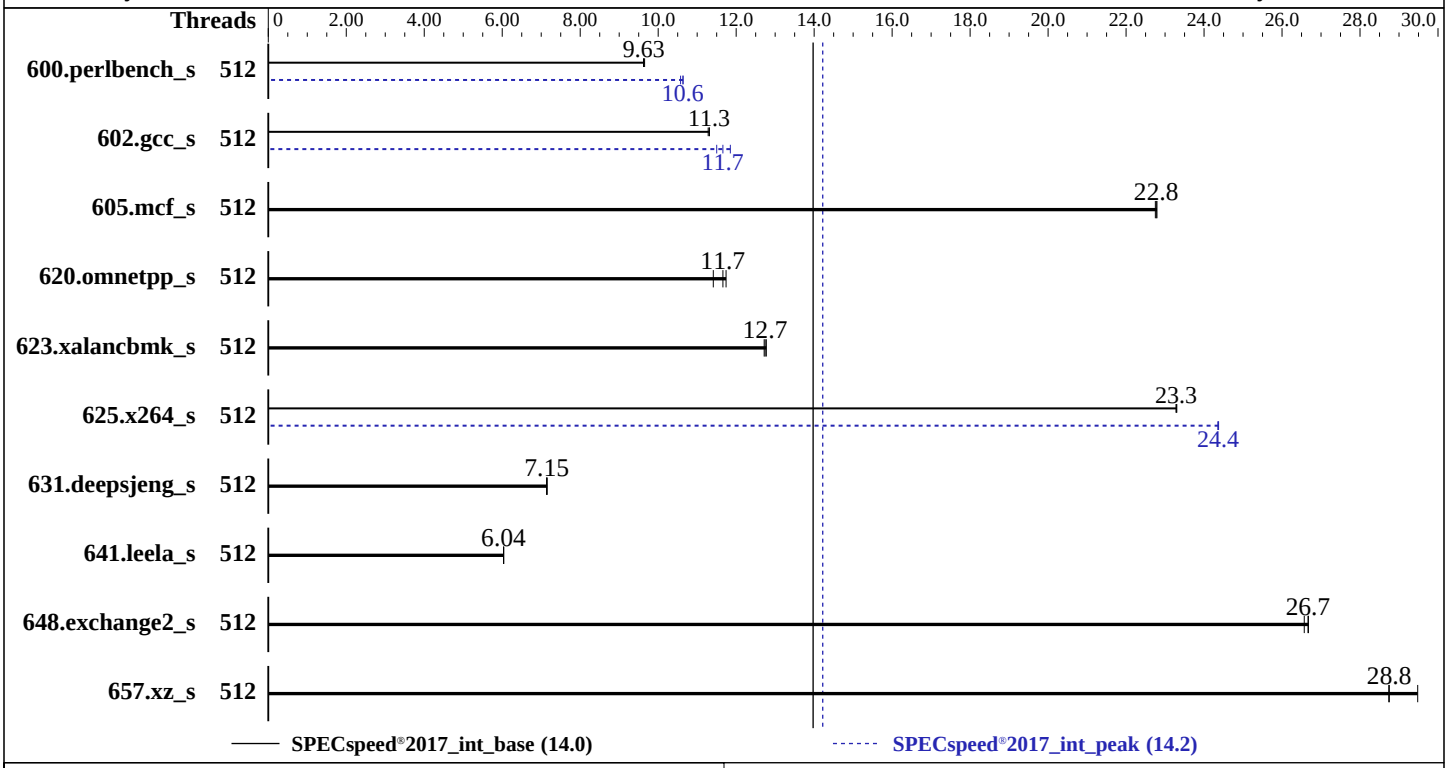

Hardware

CPU Name:	Intel Xeon 6768P
Max MHz:	3900
Nominal:	2400
Enabled:	256 cores, 4 chips, 2 threads/core
Orderable:	1,2,4 Chips
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	336 MB I+D on chip per chip
Other:	None
Memory:	2 TB (32 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 1.8 TB NVMe SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP6 Kernel 6.4.0-150600.23.60-default
Compiler:	C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	HPE BIOS Version v1.43 07/09/2025 released Jul-2025
File System:	btrfs
System State:	Run level 3 (multi-user graphical)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12
(2.40 Ghz, Intel Xeon 6768P)

SPECspeed®2017_int_base = 14.0

SPECspeed®2017_int_peak = 14.2

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Sep-2025
Hardware Availability: Jul-2025
Software Availability: Jul-2025

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	512	**184**	**9.63**	184	9.65	184	9.62	512	168	10.6	167	10.6	**167**	**10.6**
602.gcc_s	512	**352**	**11.3**	352	11.3	353	11.3	512	336	11.9	346	11.5	**342**	**11.7**
605.mcf_s	512	208	22.8	207	22.8	**207**	**22.8**	512	208	22.8	207	22.8	**207**	**22.8**
620.omnetpp_s	512	**140**	**11.7**	139	11.7	143	11.4	512	**140**	**11.7**	139	11.7	143	11.4
623.xalancbmk_s	512	**111**	**12.7**	111	12.7	111	12.8	512	**111**	**12.7**	111	12.7	111	12.8
625.x264_s	512	75.7	23.3	**75.8**	**23.3**	75.8	23.3	512	72.4	24.4	**72.4**	**24.4**	72.4	24.4
631.deepsjeng_s	512	**201**	**7.15**	200	7.15	201	7.14	512	**201**	**7.15**	200	7.15	201	7.14
641.leela_s	512	283	6.04	**283**	**6.04**	283	6.03	512	283	6.04	**283**	**6.04**	283	6.03
648.exchange2_s	512	**110**	**26.7**	111	26.6	110	26.7	512	**110**	**26.7**	111	26.6	110	26.7
657.xz_s	512	210	29.5	**215**	**28.8**	215	28.7	512	210	29.5	**215**	**28.8**	215	28.7

SPECspeed®2017_int_base = **14.0**

SPECspeed®2017_int_peak = **14.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was stopped using "systemctl stop tuned"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configurations : Parameters are selected in the order shown below
Workload Profile set to General Peak Frequency Compute
Enhanced Processor Performance Profile set to Aggressive
Thermal Configuration set to Maximum Cooling
Memory Patrol Scrubbing set to Disabled
Last Level Cache (LLC) Prefetch set to Enabled
XPT Prefetch set to Disabled
Intel UPI Prefetch set to Disabled
Workload Profile set to Custom
  Collaborative Power Control set to Enabled

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Tue Sep  2 09:27:32 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux localhost 6.4.0-150600.23.60-default #1 SMP PREEMPT_DYNAMIC Tue Jul  1 14:43:49 UTC 2025 (6f98261)
   x86_64 x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    09:27:32 up 7 min,  1 user,  load average: 1.36, 3.23, 2.21
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   benchmar pts/5    :pts/4:S.0       09:26    1:30   0.04s  0.00s SCREEN -S spec
   benchmar pts/6    :pts/4:S.0       09:26    1.00s  0.87s  0.00s sudo su

 ------------------------------------------------------------
 3. Username
   From environment variable $USER:  root
```

(Continued on next page)

Platform Notes (Continued)

```
   From the command 'logname':       benchmark

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) 0
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 8254212
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 8254212
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: benchmark [priv]
 sshd: benchmark@notty
 sh
 /home/benchmark/.vscode-server/code-488a1f239235055e34e673291fb8d8c810886f81 command-shell --cli-data-dir
   /home/benchmark/.vscode-server/cli --parent-process-id 8573 --on-host=127.0.0.1 --on-port
 sh
   /home/benchmark/.vscode-server/cli/servers/Stable-488a1f239235055e34e673291fb8d8c810886f81/server/bin/code
   -server --connection-token=remotessh --accept-server-license-terms --start-server
   --enable-remote-auto-shutdown --socket-path=/tmp/code-992a71a5-2757-46a5-8ab4-f078138ecf99
 /home/benchmark/.vscode-server/cli/servers/Stable-488a1f239235055e34e673291fb8d8c810886f81/server/node
   /home/benchmark/.vscode-server/cli/servers/Stable-488a1f239235055e34e673291fb8d8c810886f81/server/out/serv
   er-main.js --connection-token=remotessh --accept-server-license-terms --start-server
   --enable-remote-auto-shutdown --socket-path=/tmp/code-992a71a5-2757-46a5-8ab4-f078138ecf99
 /home/benchmark/.vscode-server/cli/servers/Stable-488a1f239235055e34e673291fb8d8c810886f81/server/node
   /home/benchmark/.vscode-server/cli/servers/Stable-488a1f239235055e34e673291fb8d8c810886f81/server/out/boot
   strap-fork --type=ptyHost --logsPath /home/benchmark/.vscode-server/data/logs/20250902T092550
 /bin/bash --init-file
   /home/benchmark/.vscode-server/cli/servers/Stable-488a1f239235055e34e673291fb8d8c810886f81/server/out/vs/w
   orkbench/contrib/terminal/common/scripts/shellIntegration-bash.sh
 screen -S spec
 SCREEN -S spec
 /bin/bash
 sudo su
 sudo su
 su
 bash
 bash
 runcpu --nobuild --action validate --define default-platform-flags -c 6768P-avx512-speed-20240308.cfg
   --define cores=256 --tune base,peak -o all --define intspeedaffinity --define smt-on --define drop_caches
   intspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   6768P-avx512-speed-20240308.cfg --define cores=256 --tune base,peak --output_format all --define
   intspeedaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base:peak --size
   refspeed intspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
```

(Continued on next page)

Platform Notes (Continued)

```
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6768P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x10003c2
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
    cpu cores       : 64
    siblings        : 128
    4 physical ids (chips)
    512 processors (hardware threads)
    physical id 0: core ids 0-31,64-95
    physical id 1: core ids 0-31,64-95
    physical id 2: core ids 0-31,64-95
    physical id 3: core ids 0-31,64-95
    physical id 0: apicids 0-63,128-191
    physical id 1: apicids 256-319,384-447
    physical id 2: apicids 512-575,640-703
    physical id 3: apicids 768-831,896-959
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        46 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               512
  On-line CPU(s) list:                  0-511
  Vendor ID:                            GenuineIntel
  Model name:                           Intel(R) Xeon(R) 6768P
  CPU family:                           6
  Model:                                173
  Thread(s) per core:                   2
  Core(s) per socket:                   64
  Socket(s):                            4
  Stepping:                             1
  BogoMIPS:                             4800.00
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                        nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                        pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma
                                        cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                        tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                        3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin
                                        cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep
                                        bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
                                        avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                                        cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni
```

(Continued on next page)

Platform Notes (Continued)

```
                                    avx512_bf16 wbnoinvd dtherm ida arat pln pts vnmi avx512vbmi umip
                                    pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
                                    avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                                    cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk
                                    pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8
                                    flush_l1d arch_capabilities
  Virtualization:                   VT-x
  L1d cache:                        12 MiB (256 instances)
  L1i cache:                        16 MiB (256 instances)
  L2 cache:                         512 MiB (256 instances)
  L3 cache:                         1.3 GiB (4 instances)
  NUMA node(s):                     8
  NUMA node0 CPU(s):                0-31,256-287
  NUMA node1 CPU(s):                32-63,288-319
  NUMA node2 CPU(s):                64-95,320-351
  NUMA node3 CPU(s):                96-127,352-383
  NUMA node4 CPU(s):                128-159,384-415
  NUMA node5 CPU(s):                160-191,416-447
  NUMA node6 CPU(s):                192-223,448-479
  NUMA node7 CPU(s):                224-255,480-511
  Vulnerability Gather data sampling:      Not affected
  Vulnerability Indirect target selection: Not affected
  Vulnerability Itlb multihit:             Not affected
  Vulnerability L1tf:                      Not affected
  Vulnerability Mds:                       Not affected
  Vulnerability Meltdown:                  Not affected
  Vulnerability Mmio stale data:           Not affected
  Vulnerability Reg file data sampling:    Not affected
  Vulnerability Retbleed:                  Not affected
  Vulnerability Spec rstack overflow:      Not affected
  Vulnerability Spec store bypass:         Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:                Mitigation; usercopy/swapgs barriers and __user pointer
                                    sanitization
  Vulnerability Spectre v2:                Mitigation; Enhanced / Automatic IBRS; IBPB conditional;
                                    PBRSB-eIBRS Not affected; BHI BHI_DIS_S
  Vulnerability Srbds:                     Not affected
  Vulnerability Tsx async abort:           Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K      12M   12 Data            1     64        1             64
     L1i       64K      16M   16 Instruction     1     64        1             64
     L2         2M     512M   16 Unified         2   2048        1             64
     L3       336M     1.3G   16 Unified         3 344064        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-31,256-287
  node 0 size: 257561 MB
  node 0 free: 256483 MB
  node 1 cpus: 32-63,288-319
  node 1 size: 258031 MB
  node 1 free: 257200 MB
  node 2 cpus: 64-95,320-351
  node 2 size: 258031 MB
  node 2 free: 255084 MB
  node 3 cpus: 96-127,352-383
  node 3 size: 258031 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 3 free: 256704 MB
  node 4 cpus: 128-159,384-415
  node 4 size: 258031 MB
  node 4 free: 257305 MB
  node 5 cpus: 160-191,416-447
  node 5 size: 257992 MB
  node 5 free: 256834 MB
  node 6 cpus: 192-223,448-479
  node 6 size: 258031 MB
  node 6 free: 256872 MB
  node 7 cpus: 224-255,480-511
  node 7 size: 257876 MB
  node 7 free: 257091 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  21  21  21  21  21  21
    1:  12  10  21  21  21  21  21  21
    2:  21  21  10  12  21  21  21  21
    3:  21  21  12  10  21  21  21  21
    4:  21  21  21  21  10  12  21  21
    5:  21  21  21  21  12  10  21  21
    6:  21  21  21  21  21  21  10  12
    7:  21  21  21  21  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       2113112132 kB

------------------------------------------------------------
10. who -r
  run-level 3 Sep 2 09:26 last=5

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
                   bluetooth chronyd cron display-manager getty@ irqbalance iscsi issue-generator kbdsettings
                   klog lvm2-monitor nscd nvmefc-boot-connections nvmf-autoconnect postfix purge-kernels
                   rollback rsyslog smartd sshd systemd-pstore virtqemud wicked wickedd-auto4 wickedd-dhcp4
                   wickedd-dhcp6 wickedd-nanny wpa_supplicant
  enabled-runtime  systemd-remount-fs
  disabled         NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
                   autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
                   chrony-wait console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq ebtables
                   exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd
                   iscsi-init iscsid issue-add-ssh-keys kexec-load ksm kvm_stat libvirt-guests lunmask
                   man-db-create multipathd nfs nfs-blkmap nfs-server nfsserver nmb openvpn@ ostree-remount
                   rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd
                   snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-confext
                   systemd-network-generator systemd-nspawn@ systemd-sysext systemd-time-wait-sync
                   systemd-timesyncd tcsd tuned udisks2 update-system-flatpaks upower virtinterfaced
                   virtlockd virtlogd virtnetworkd virtnodedevd virtnwfilterd virtsecretd virtstoraged
                   vncserver@ wpa_supplicant@
  indirect         pcscd saned@ systemd-userdbd tftp wickedd
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.23.60-default
  root=UUID=31ddc59e-f5ed-47da-8154-f16fa2fc98b8
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 363:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  It seems that tuned daemon is not running, preset profile is not activated.
  Preset profile: virtual-host

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              0
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         40
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000
```

(Continued on next page)

Platform Notes (Continued)

```
 ------------------------------------------------------------
 19. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP6

 ------------------------------------------------------------
 20. Disk information
 SPEC is set to: /home/cpu2017
   Filesystem     Type   Size  Used Avail Use% Mounted on
   /dev/nvme5n1p3 btrfs  1.8T  313G  1.5T  18% /home

 ------------------------------------------------------------
 21. /sys/devices/virtual/dmi/id
     Vendor:          HPE
     Product:         HPE ProLiant Compute DL580 Gen12
     Product Family: ProLiant
     Serial:          SANJACSCM

 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     4x Hynix HMCG94AHBRA480N 64 GB 2 rank 6400
     5x Micron MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400
     23x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       HPE
    BIOS Version:      1.43
    BIOS Date:         07/09/2025
    BIOS Revision:     1.43
    Firmware Revision: 1.17
```

Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
        | 657.xz_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
        | 641.leela_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Fortran | 648.exchange2_s(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

(Continued on next page)

Peak Optimization Flags (Continued)

605.mcf_s: `basepeak = yes`

625.x264_s: `-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

657.xz_s: `basepeak = yes`

C++ benchmarks:

620.omnetpp_s: `basepeak = yes`

623.xalancbmk_s: `basepeak = yes`

631.deepsjeng_s: `basepeak = yes`

641.leela_s: `basepeak = yes`

Fortran benchmarks:

648.exchange2_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.3.html
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.3.xml
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-09-02 10:27:32-0400.
Report generated on 2025-11-05 12:05:46 by CPU2017 PS formatter v6716.
Originally published on 2025-11-04.