SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.70 GHz, AMD EPYC 9755)

SPECspeed®2017_int_base = 17.7

SPECspeed®2017_int_peak = 18.0

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2025
Hardware Availability: Jul-2025
Software Availability: Oct-2024

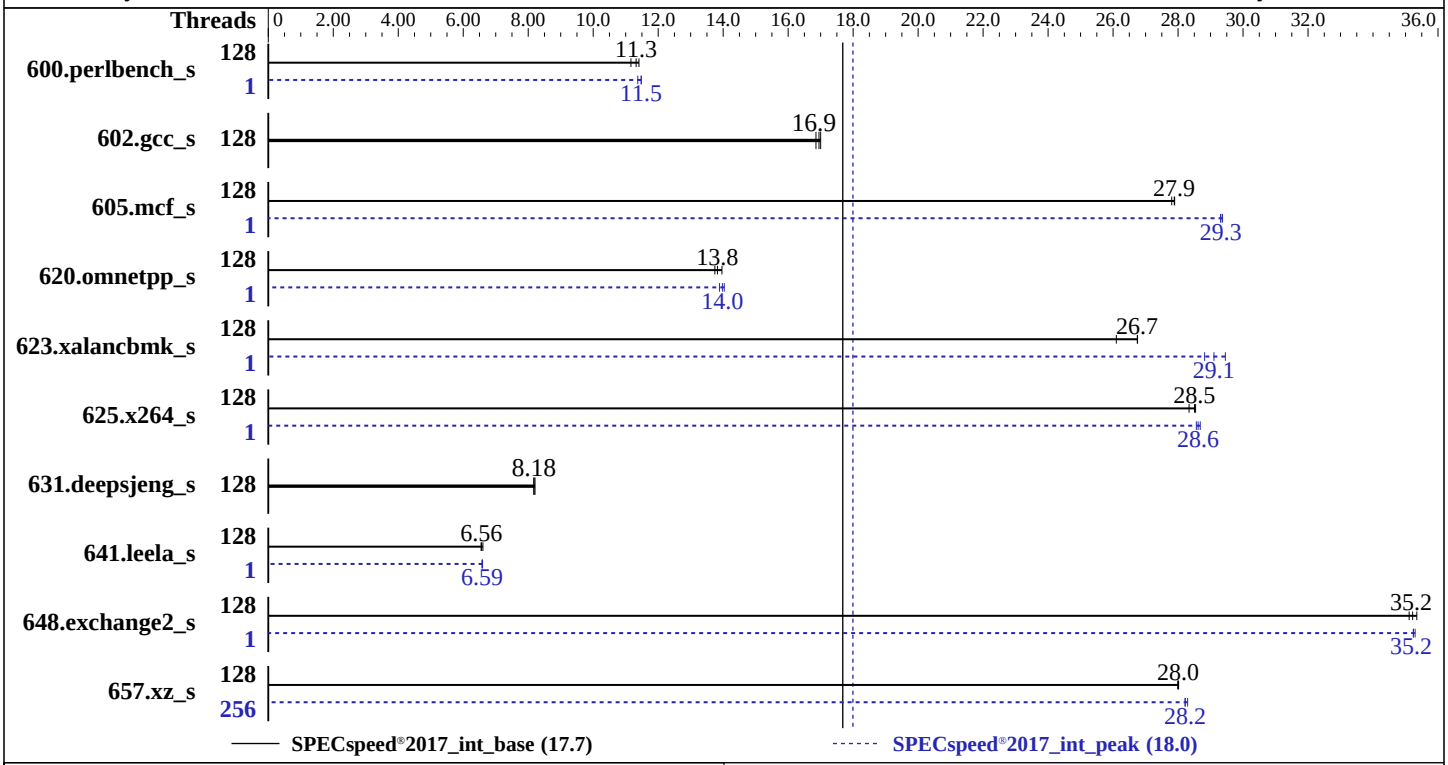

Hardware

CPU Name:	AMD EPYC 9755
Max MHz:	4100
Nominal:	2700
Enabled:	128 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	512 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
Storage:	1 x 1.8 TB NVMe SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP6 kernel 6.4.0-150600.21-default
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	Yes
Firmware:	HPE BIOS Version v1.20 07/11/2025 released Jul-2025
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant Compute DL325 Gen12
(2.70 GHz, AMD EPYC 9755)

SPECspeed®2017_int_base = 17.7

SPECspeed®2017_int_peak = 18.0

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2025
Hardware Availability: Jul-2025
Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	128	159	11.2	**157**	**11.3**	156	11.4	1	155	11.5	**155**	**11.5**	156	11.4
602.gcc_s	128	**235**	**16.9**	234	17.0	236	16.9	128	**235**	**16.9**	234	17.0	236	16.9
605.mcf_s	128	**169**	**27.9**	169	27.9	170	27.8	1	161	29.4	161	29.3	**161**	**29.3**
620.omnetpp_s	128	117	14.0	119	13.7	**118**	**13.8**	1	117	13.9	116	14.0	**117**	**14.0**
623.xalancbmk_s	128	53.0	26.8	**53.0**	**26.7**	54.3	26.1	1	**48.7**	**29.1**	49.2	28.8	48.1	29.5
625.x264_s	128	61.8	28.5	62.2	28.3	**61.9**	**28.5**	1	61.5	28.7	61.8	28.6	**61.6**	**28.6**
631.deepsjeng_s	128	175	8.17	175	8.21	**175**	**8.18**	128	175	8.17	175	8.21	**175**	**8.18**
641.leela_s	128	260	6.55	**260**	**6.56**	258	6.61	1	**259**	**6.59**	259	6.58	259	6.59
648.exchange2_s	128	83.7	35.1	**83.5**	**35.2**	83.2	35.3	1	83.4	35.2	83.3	35.3	**83.4**	**35.2**
657.xz_s	128	221	28.0	221	28.0	**221**	**28.0**	256	218	28.3	219	28.2	**219**	**28.2**

SPECspeed®2017_int_base = 17.7

SPECspeed®2017_int_peak = 18.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-255"
LD_LIBRARY_PATH =
     "/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "256"

Environment variables set by runcpu during the 600.perlbench_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 605.mcf_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 620.omnetpp_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 625.x264_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 641.leela_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 648.exchange2_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 657.xz_s peak run:
GOMP_CPU_AFFINITY = "0-255"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Configurations : Parameters are selected in the order shown below
Workload Profile set to General Peak Frequency Compute
Determinism Control set to Manual
Performance Determinism set to Power Deterministic
Memory Patrol Scrubbing set to Disabled
ACPI CST C2 Latency set to 18 microseconds
Last-Level Cache (LLC) as NUMA Node set to Enabled
NUMA memory domains per socket set to Four memory domains per socket
Thermal Configuration set to Enhanced CPU Cooling
```

(Continued on next page)

Platform Notes (Continued)

```
 Workload Profile set to Custom
  Power Regulator set to OS Control Mode

  Sysinfo program /home/cpu2017/bin/sysinfo
  Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
  running on localhost Sat Aug 30 21:54:11 2025

  SUT (System Under Test) info as seen by some common utilities.

  ------------------------------------------------------------
  Table of contents
  ------------------------------------------------------------
   1. uname -a
   2. w
   3. Username
   4. ulimit -a
   5. sysinfo process ancestry
   6. /proc/cpuinfo
   7. lscpu
   8. numactl --hardware
   9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. sysctl
  16. /sys/kernel/mm/transparent_hugepage
  17. /sys/kernel/mm/transparent_hugepage/khugepaged
  18. OS release
  19. Disk information
  20. /sys/devices/virtual/dmi/id
  21. dmidecode
  22. BIOS
  ------------------------------------------------------------

  ------------------------------------------------------------
  1. uname -a
    Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09/lp)
    x86_64 x86_64 x86_64 GNU/Linux

  ------------------------------------------------------------
  2. w
     21:54:11 up  1:36,  3 users,  load average: 0.18, 0.04, 0.01
    USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
    root     pts/1    10.79.30.182:S.0 21:53   11.00s  0.89s  0.10s /bin/bash ./amd_speed_aocc500_znver5_A1.sh

  ------------------------------------------------------------
  3. Username
    From environment variable $USER:  root

  ------------------------------------------------------------
  4. ulimit -a
    core file size          (blocks, -c) unlimited
    data seg size           (kbytes, -d) unlimited
    scheduling priority             (-e) 0
    file size               (blocks, -f) unlimited
    pending signals                 (-i) 3094218
    max locked memory       (kbytes, -l) 2097152
    max memory size         (kbytes, -m) unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
   open files                      (-n) 1024
   pipe size            (512 bytes, -p) 8
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 3094218
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@pts/0
 -bash
 screen -S cpu
 SCREEN -S cpu
 /bin/bash
 python3 ./run_intspeed.py
 /bin/bash ./amd_speed_aocc500_znver5_A1.sh
 runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeed
 runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.019/templogs/preenv.intspeed.019.0.log --lognum 019.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9755 128-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 2
    stepping        : 1
    microcode       : 0xb002151
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 192 4K pages
    cpu cores       : 128
    siblings        : 256
    1 physical ids (chips)
    256 processors (hardware threads)
    physical id 0: core ids 0-127
    physical id 0: apicids 0-255
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               256
  On-line CPU(s) list:                  0-255
  Vendor ID:                            AuthenticAMD
  BIOS Vendor ID:                       Advanced Micro Devices, Inc.
```

(Continued on next page)

Platform Notes (Continued)

```
  Model name:                      AMD EPYC 9755 128-Core Processor
  BIOS Model name:                 AMD EPYC 9755 128-Core Processor                CPU @ 2.7GHz
  BIOS CPU family:                 107
  CPU family:                      26
  Model:                           2
  Thread(s) per core:              2
  Core(s) per socket:              128
  Socket(s):                       1
  Stepping:                        1
  Frequency boost:                 enabled
  CPU(s) scaling MHz:              101%
  CPU max MHz:                     2700.0000
  CPU min MHz:                     1500.0000
  BogoMIPS:                        5392.00
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                   pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                   rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                   extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                   sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                   cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                   osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                   perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                   ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                   smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                   avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                   xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                   cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                   xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                                   nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                                   pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                                   avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                   avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                   movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                   flush_l1d debug_swap
  Virtualization:                  AMD-V
  L1d cache:                       6 MiB (128 instances)
  L1i cache:                       4 MiB (128 instances)
  L2 cache:                        128 MiB (128 instances)
  L3 cache:                        512 MiB (16 instances)
  NUMA node(s):                    16
  NUMA node0 CPU(s):               0-7,128-135
  NUMA node1 CPU(s):               8-15,136-143
  NUMA node2 CPU(s):               16-23,144-151
  NUMA node3 CPU(s):               24-31,152-159
  NUMA node4 CPU(s):               32-39,160-167
  NUMA node5 CPU(s):               40-47,168-175
  NUMA node6 CPU(s):               48-55,176-183
  NUMA node7 CPU(s):               56-63,184-191
  NUMA node8 CPU(s):               64-71,192-199
  NUMA node9 CPU(s):               72-79,200-207
  NUMA node10 CPU(s):              80-87,208-215
  NUMA node11 CPU(s):              88-95,216-223
  NUMA node12 CPU(s):              96-103,224-231
  NUMA node13 CPU(s):              104-111,232-239
  NUMA node14 CPU(s):              112-119,240-247
  NUMA node15 CPU(s):              120-127,248-255
  Vulnerability Gather data sampling:  Not affected
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
   Vulnerability Meltdown:                Not affected
   Vulnerability Mmio stale data:         Not affected
   Vulnerability Reg file data sampling: Not affected
   Vulnerability Retbleed:                Not affected
   Vulnerability Spec rstack overflow:    Not affected
   Vulnerability Spec store bypass:       Mitigation; Speculative Store Bypass disabled via prctl
   Vulnerability Spectre v1:              Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:              Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                          always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
   Vulnerability Srbds:                   Not affected
   Vulnerability Tsx async abort:         Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
      L1d       48K       6M   12 Data            1    64        1             64
      L1i       32K       4M    8 Instruction     1    64        1             64
      L2         1M     128M   16 Unified         2  1024        1             64
      L3        32M     512M   16 Unified         3 32768        1             64

 ------------------------------------------------------------
 8. numactl --hardware
 NOTE: a numactl 'node' might or might not correspond to a physical chip.
   available: 16 nodes (0-15)
   node 0 cpus: 0-7,128-135
   node 0 size: 48063 MB
   node 0 free: 47396 MB
   node 1 cpus: 8-15,136-143
   node 1 size: 48379 MB
   node 1 free: 48156 MB
   node 2 cpus: 16-23,144-151
   node 2 size: 48379 MB
   node 2 free: 48178 MB
   node 3 cpus: 24-31,152-159
   node 3 size: 48379 MB
   node 3 free: 48133 MB
   node 4 cpus: 32-39,160-167
   node 4 size: 48379 MB
   node 4 free: 48126 MB
   node 5 cpus: 40-47,168-175
   node 5 size: 48379 MB
   node 5 free: 48199 MB
   node 6 cpus: 48-55,176-183
   node 6 size: 48379 MB
   node 6 free: 48172 MB
   node 7 cpus: 56-63,184-191
   node 7 size: 48341 MB
   node 7 free: 48180 MB
   node 8 cpus: 64-71,192-199
   node 8 size: 48379 MB
   node 8 free: 48183 MB
   node 9 cpus: 72-79,200-207
   node 9 size: 48379 MB
   node 9 free: 48095 MB
   node 10 cpus: 80-87,208-215
   node 10 size: 48379 MB
   node 10 free: 48107 MB
   node 11 cpus: 88-95,216-223
   node 11 size: 48244 MB
   node 11 free: 48092 MB
   node 12 cpus: 96-103,224-231
```

(Continued on next page)

Platform Notes (Continued)

```
  node 12 size: 48379 MB
  node 12 free: 48212 MB
  node 13 cpus: 104-111,232-239
  node 13 size: 48379 MB
  node 13 free: 48240 MB
  node 14 cpus: 112-119,240-247
  node 14 size: 48379 MB
  node 14 free: 48055 MB
  node 15 cpus: 120-127,248-255
  node 15 size: 48379 MB
  node 15 free: 48061 MB
  node distances:
  node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
    0:  10  11  11  11  11  11  11  11  12  12  12  12  12  12  12  12
    1:  11  10  11  11  11  11  11  11  12  12  12  12  12  12  12  12
    2:  11  11  10  11  11  11  11  11  12  12  12  12  12  12  12  12
    3:  11  11  11  10  11  11  11  11  12  12  12  12  12  12  12  12
    4:  11  11  11  11  10  11  11  11  12  12  12  12  12  12  12  12
    5:  11  11  11  11  11  10  11  11  12  12  12  12  12  12  12  12
    6:  11  11  11  11  11  11  10  11  12  12  12  12  12  12  12  12
    7:  11  11  11  11  11  11  11  10  12  12  12  12  12  12  12  12
    8:  12  12  12  12  12  12  12  12  10  11  11  11  11  11  11  11
    9:  12  12  12  12  12  12  12  12  11  10  11  11  11  11  11  11
   10:  12  12  12  12  12  12  12  12  11  11  10  11  11  11  11  11
   11:  12  12  12  12  12  12  12  12  11  11  11  10  11  11  11  11
   12:  12  12  12  12  12  12  12  12  11  11  11  11  10  11  11  11
   13:  12  12  12  12  12  12  12  12  11  11  11  11  11  10  11  11
   14:  12  12  12  12  12  12  12  12  11  11  11  11  11  11  10  11
   15:  12  12  12  12  12  12  12  12  11  11  11  11  11  11  11  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       792151108 kB

------------------------------------------------------------
10. who -r
  run-level 5 Aug 30 20:18

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
                   bluetooth cron display-manager getty@ irqbalance iscsi issue-generator kbdsettings klog
                   lvm2-monitor nscd nvmefc-boot-connections nvmf-autoconnect oracle postfix purge-kernels
                   rollback rsyslog sapconf smartd sshd sysctl-logger systemd-pstore virtqemud virtxend
                   wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant xencommons
  enabled-runtime  systemd-fsck-root systemd-remount-fs
  disabled         NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon amavis
                   apache2 apache2@ autofs autoyast-initscripts bgpd blk-availability bluetooth-mesh
                   boot-sysctl booth-arbitrator booth@ ca-certificates certmonger chrony-wait chronyd
                   clamav-milter clamd console-getty corosync corosync-notifyd crm_mon ctdb cups cups-browsed
                   ddclient debug-shell dhcpd dhcpd6 dhcrelay dhcrelay6 dirsrv@ dlm dnsmasq drbd
                   drbd-lvchange@ drbd-wait-promotable@ ebtables exchange-bmc-os-info fetchmail firewalld
                   freshclam fsidd gpm grub2-once haveged hawk hwloc-dump-hwdata ipmi ipmievd ipvsadm
                   iscsi-init iscsid isisd issue-add-ssh-keys kexec-load ksm kvm_stat ldirectord
```

(Continued on next page)

Platform Notes (Continued)

```
                  libvirt-guests logd lunmask lvmlockd lvmlocks man-db-create mariadb mariadb@ multipathd
                  named nfs nfs-blkmap nfs-server nfsserver nmb openvpn@ ospf6d ospfd ostree-remount
                  pacemaker racoon racoon-setkey radvd rarpd@ ripd ripngd rpcbind rpmconfigcheck rsyncd
                  rtkit-daemon sanlock sbd sbd_remote serial-getty@ smartd_generate_opts smb snmpd snmptrapd
                  spamd spampd speech-dispatcherd squid srp_daemon srp_daemon_port@ strongswan
                  strongswan-starter svnserve sysstat systemd-boot-check-no-failures systemd-confext
                  systemd-network-generator systemd-nspawn@ systemd-sysext systemd-time-wait-sync
                  systemd-timesyncd tcsd udisks2 update-system-flatpaks upower virtinterfaced virtlockd
                  virtlogd virtnetworkd virtnodedevd virtnwfilterd virtsecretd virtstoraged vncserver@
                  vsftpd wdmd winbind wpa_supplicant@ xen-dom0-modules xen-init-dom0
                  xen-qemu-dom0-disk-backend xen-watchdog xenconsoled xendomains xenstored zebra
  indirect        pcscd saned@ systemd-userdbd tftp uuidd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=97def8eb-7bcd-4ed3-b3a2-8816e352f9b0
  splash=silent
  mitigations=auto
  quiet
  security=apparmor
  amd_pstate=active

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 240:
    current policy: frequency should be within 1.50 GHz and 2.70 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing                  0
  kernel.randomize_va_space              0
  vm.compaction_proactiveness           20
  vm.dirty_background_bytes       314572800
  vm.dirty_background_ratio              0
  vm.dirty_bytes                         0
  vm.dirty_expire_centisecs           3000
  vm.dirty_ratio                         8
  vm.dirty_writeback_centisecs         500
  vm.dirtytime_expire_seconds        43200
  vm.extfrag_threshold                 500
  vm.min_unmapped_ratio                  1
  vm.nr_hugepages                        0
  vm.nr_hugepages_mempolicy              0
  vm.nr_overcommit_hugepages             0
  vm.swappiness                          1
  vm.watermark_boost_factor          15000
  vm.watermark_scale_factor             10
  vm.zone_reclaim_mode                   1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
```

(Continued on next page)

Platform Notes (Continued)

```
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p3 ext4  1.8T   19G  1.7T   2% /

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:          HPE
    Product:         HPE ProLiant Compute DL325 Gen12
    Product Family: ProLiant
    Serial:          SANJACSCM

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    8x Hynix HMCG94AHBRA480N 64 GB 2 rank 6400, configured at 5200
    4x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400, configured at 5200


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       HPE
   BIOS Version:      1.20
   BIOS Date:         07/11/2025
   BIOS Revision:     1.20
   Firmware Revision: 1.16
```

Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
        | 657.xz_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)

Compiler Version Notes (Continued)

```
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
        | 641.leela_s(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 648.exchange2_s(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc
```

C++ benchmarks:
```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

Base Other Flags

C benchmarks:
```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:
```
-Wno-unused-command-line-argument
```

Fortran benchmarks:
```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

602.gcc_s: basepeak = yes

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

625.x264_s: Same as 600.perlbench_s

(Continued on next page)

Peak Optimization Flags (Continued)

657.xz_s: Same as 600.perlbench_s

C++ benchmarks:

620.omnetpp_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang

631.deepsjeng_s: basepeak = yes

641.leela_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:
`-Wno-return-type -Wno-unused-command-line-argument`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.7.html`
`http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.7.xml`
`http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-08-30 22:54:11-0400.
Report generated on 2025-11-05 12:07:54 by CPU2017 PS formatter v6716.
Originally published on 2025-11-04.