SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.10 GHz, AMD EPYC 9845)

SPECspeed®2017_fp_base = 354

SPECspeed®2017_fp_peak = 371

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Sep-2025
Hardware Availability: Jul-2025
Software Availability: Oct-2024

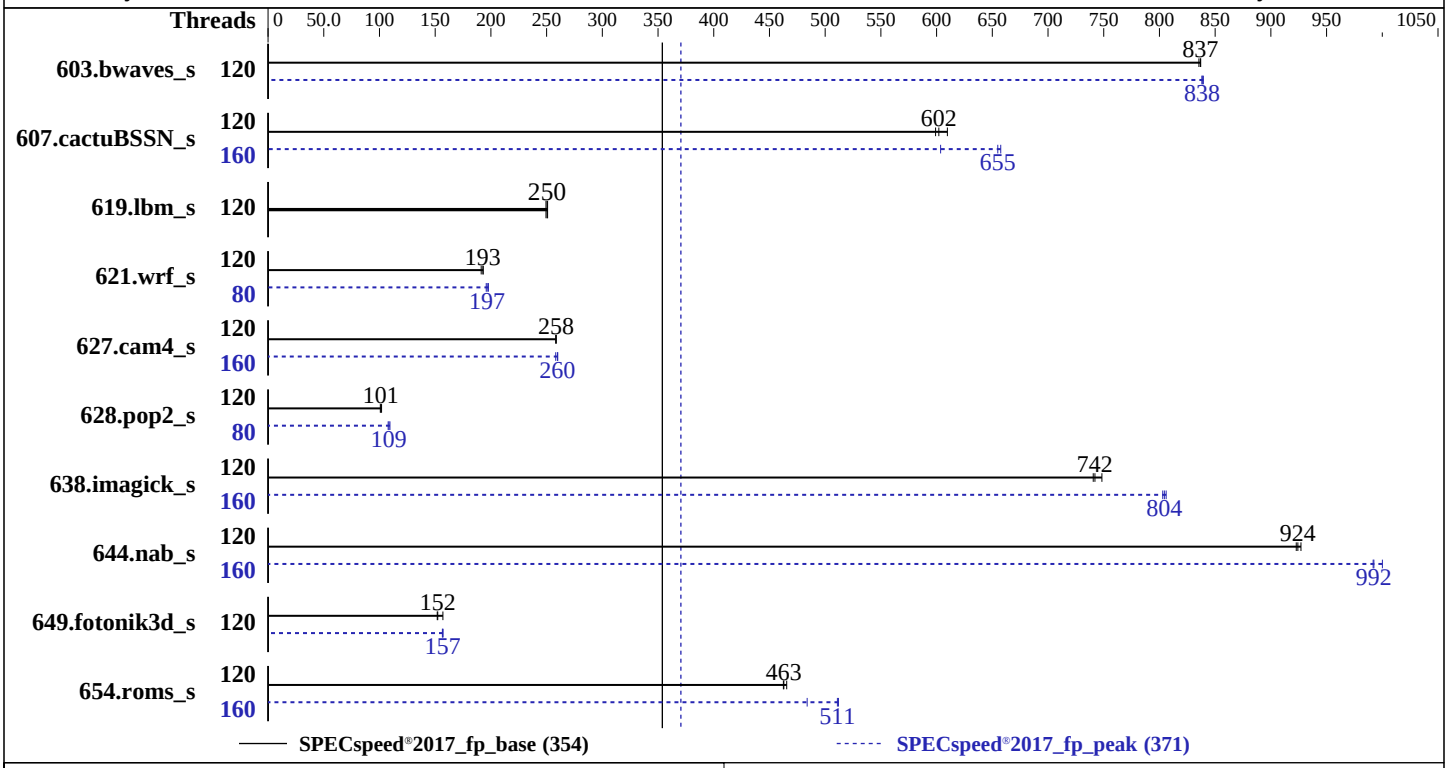

Hardware

CPU Name:	AMD EPYC 9845
Max MHz:	3700
Nominal:	2100
Enabled:	160 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	320 MB I+D on chip per chip, 32 MB shared / 16 cores
Other:	None
Memory:	768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
Storage:	1 x 3 TB NVMe SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP6 kernel 6.4.0-150600.21-default
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	Yes
Firmware:	HPE BIOS Version v1.20 07/11/2025 released Jul-2025
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	120	**70.5**	**837**	70.5	837	70.6	835	120	70.4	838	**70.4**	**838**	70.3	839
607.cactuBSSN_s	120	**27.7**	**602**	27.3	610	27.8	599	160	25.4	658	**25.5**	**655**	27.6	604
619.lbm_s	120	**20.9**	**250**	21.0	249	20.9	251	120	**20.9**	**250**	21.0	249	20.9	251
621.wrf_s	120	69.1	191	**68.6**	**193**	68.5	193	80	67.5	196	66.9	198	**67.2**	**197**
627.cam4_s	120	34.3	259	34.3	258	**34.3**	**258**	160	34.3	258	**34.1**	**260**	34.1	260
628.pop2_s	120	**117**	**101**	117	102	118	101	80	110	108	**109**	**109**	109	109
638.imagick_s	120	**19.4**	**742**	19.5	741	19.3	748	160	**17.9**	**804**	17.9	806	18.0	803
644.nab_s	120	18.9	923	**18.9**	**924**	18.8	927	160	17.6	992	17.5	1000	**17.6**	**992**
649.fotonik3d_s	120	58.1	157	**59.9**	**152**	60.0	152	120	58.3	156	**58.1**	**157**	58.1	157
654.roms_s	120	34.0	462	**34.0**	**463**	33.8	465	160	30.8	512	32.5	484	**30.8**	**511**

SPECspeed®2017_fp_base = 354

SPECspeed®2017_fp_peak = 371

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-319"
LD_LIBRARY_PATH =
      "/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "320"

Environment variables set by runcpu during the 603.bwaves_s peak run:
GOMP_CPU_AFFINITY = "0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:
GOMP_CPU_AFFINITY = "0-159"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY =
      "0,160,1,161,2,162,3,163,4,164,5,165,6,166,7,167,8,168,9,169,10,170,11,171,12,172,13,173,14,174,15,175
      ,16,176,17,177,18,178,19,179,20,180,21,181,22,182,23,183,24,184,25,185,26,186,27,187,28,188,29,189,30,
      190,31,191,32,192,33,193,34,194,35,195,36,196,37,197,38,198,39,199"

Environment variables set by runcpu during the 627.cam4_s peak run:
GOMP_CPU_AFFINITY = "0-159"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-79"

Environment variables set by runcpu during the 638.imagick_s peak run:
GOMP_CPU_AFFINITY = "0-159"

Environment variables set by runcpu during the 644.nab_s peak run:
GOMP_CPU_AFFINITY = "0-159"

Environment variables set by runcpu during the 649.fotonik3d_s peak run:
GOMP_CPU_AFFINITY = "0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0-159"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Configurations : Parameters are selected in the order shown below
Workload Profile set to General Peak Frequency Compute
Determinism Control set to Manual
```

(Continued on next page)

Platform Notes (Continued)

```
Performance Determinism set to Power Deterministic
Memory Patrol Scrubbing set to Disabled
ACPI CST C2 Latency set to 18 microseconds
Last-Level Cache (LLC) as NUMA Node set to Enabled
NUMA memory domains per socket set to Four memory domains per socket
Thermal Configuration set to Enhanced CPU Cooling
Workload Profile set to Custom
 Power Regulator set to OS Control Mode

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Fri Sep 19 01:45:10 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09/lp)
   x86_64 x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    01:45:10 up  3:05,  2 users,  load average: 6.46, 6.00, 3.74
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   root     console  :0               22:41    3:05m  0.00s  0.01s gdm-session-worker [pam/gdm-password]
   root              :0               22:41   ?xdm?   3:02   0.04s /usr/lib/gnome-session-binary

 ------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

 ------------------------------------------------------------
 4. ulimit -a
```

(Continued on next page)

Platform Notes (Continued)

```
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority             (-e) 0
   file size               (blocks, -f) unlimited
   pending signals                 (-i) 3093878
   max locked memory       (kbytes, -l) 2097152
   max memory size         (kbytes, -m) unlimited
   open files                      (-n) 1024
   pipe size            (512 bytes, -p) 8
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 3093878
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 SCREEN -S cpu
 /bin/bash
 python3 ./run_intspeed.py
 /bin/bash ./amd_speed_aocc500_znver5_A1.sh
 runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
 runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
    --runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
    $SPEC/tmp/CPU2017.051/templogs/preenv.fpspeed.051.0.log --lognum 051.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9845 160-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 17
    stepping        : 0
    microcode       : 0xb10104e
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 192 4K pages
    cpu cores       : 160
    siblings        : 320
    1 physical ids (chips)
    320 processors (hardware threads)
    physical id 0: core ids 0-159
    physical id 0: apicids 0-319
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               320
  On-line CPU(s) list:                  0-319
```

(Continued on next page)

Platform Notes (Continued)

```
Vendor ID:                          AuthenticAMD
Model name:                         AMD EPYC 9845 160-Core Processor
CPU family:                         26
Model:                              17
Thread(s) per core:                 2
Core(s) per socket:                 160
Socket(s):                          1
Stepping:                           0
Frequency boost:                    enabled
CPU(s) scaling MHz:                 102%
CPU max MHz:                        2100.0000
CPU min MHz:                        1500.0000
BogoMIPS:                           4199.87
Flags:                              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                    pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                    rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                    extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                    sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                    cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                    osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                    perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                    ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                    smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                    avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                    xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                    cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                    xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                                    nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                                    pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                                    avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                    avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                    movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                    flush_l1d debug_swap
Virtualization:                     AMD-V
L1d cache:                          7.5 MiB (160 instances)
L1i cache:                          5 MiB (160 instances)
L2 cache:                           160 MiB (160 instances)
L3 cache:                           320 MiB (10 instances)
NUMA node(s):                       10
NUMA node0 CPU(s):                  0-15,160-175
NUMA node1 CPU(s):                  16-31,176-191
NUMA node2 CPU(s):                  32-47,192-207
NUMA node3 CPU(s):                  48-63,208-223
NUMA node4 CPU(s):                  64-79,224-239
NUMA node5 CPU(s):                  80-95,240-255
NUMA node6 CPU(s):                  96-111,256-271
NUMA node7 CPU(s):                  112-127,272-287
NUMA node8 CPU(s):                  128-143,288-303
NUMA node9 CPU(s):                  144-159,304-319
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:        Not affected
Vulnerability L1tf:                 Not affected
Vulnerability Mds:                  Not affected
Vulnerability Meltdown:             Not affected
Vulnerability Mmio stale data:      Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:             Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:    Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:           Mitigation; usercopy/swapgs barriers and __user pointer sanitization
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                        always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     7.5M   12 Data            1    64        1             64
     L1i       32K       5M    8 Instruction     1    64        1             64
     L2         1M     160M   16 Unified         2  1024        1             64
     L3        32M     320M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 10 nodes (0-9)
  node 0 cpus: 0-15,160-175
  node 0 size: 77026 MB
  node 0 free: 69621 MB
  node 1 cpus: 16-31,176-191
  node 1 size: 77405 MB
  node 1 free: 76989 MB
  node 2 cpus: 32-47,192-207
  node 2 size: 77403 MB
  node 2 free: 77177 MB
  node 3 cpus: 48-63,208-223
  node 3 size: 77407 MB
  node 3 free: 77109 MB
  node 4 cpus: 64-79,224-239
  node 4 size: 77407 MB
  node 4 free: 77151 MB
  node 5 cpus: 80-95,240-255
  node 5 size: 77407 MB
  node 5 free: 73010 MB
  node 6 cpus: 96-111,256-271
  node 6 size: 77407 MB
  node 6 free: 77153 MB
  node 7 cpus: 112-127,272-287
  node 7 size: 77405 MB
  node 7 free: 76917 MB
  node 8 cpus: 128-143,288-303
  node 8 size: 77367 MB
  node 8 free: 77103 MB
  node 9 cpus: 144-159,304-319
  node 9 size: 77262 MB
  node 9 free: 76834 MB
  node distances:
  node   0   1   2   3   4   5   6   7   8   9
    0:  10  11  11  11  11  12  12  12  12  12
    1:  11  10  11  11  11  12  12  12  12  12
    2:  11  11  10  11  11  12  12  12  12  12
    3:  11  11  11  10  11  12  12  12  12  12
    4:  11  11  11  11  10  12  12  12  12  12
    5:  12  12  12  12  12  10  11  11  11  11
    6:  12  12  12  12  12  11  10  11  11  11
    7:  12  12  12  12  12  11  11  10  11  11
    8:  12  12  12  12  12  11  11  11  10  11
    9:  12  12  12  12  12  11  11  11  11  10

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 9. /proc/meminfo
    MemTotal:       792064228 kB

 ------------------------------------------------------------
 10. who -r
   run-level 5 Sep 18 22:40

 ------------------------------------------------------------
 11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
   Default Target  Status
   graphical       running

 ------------------------------------------------------------
 12. Services, from systemctl list-unit-files
   STATE            UNIT FILES
   enabled          ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
                    bluetooth cron display-manager getty@ irqbalance iscsi issue-generator kbdsettings klog
                    lvm2-monitor nscd nvmefc-boot-connections nvmf-autoconnect oracle postfix purge-kernels
                    rollback rsyslog sapconf smartd sshd sysctl-logger systemd-pstore virtqemud virtxend
                    wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant xencommons
   enabled-runtime  systemd-fsck-root systemd-remount-fs
   disabled         NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon amavis
                    apache2 apache2@ autofs autoyast-initscripts bgpd blk-availability bluetooth-mesh
                    boot-sysctl booth-arbitrator booth@ ca-certificates certmonger chrony-wait chronyd
                    clamav-milter clamd clamonacc console-getty corosync corosync-notifyd crm_mon ctdb cups
                    cups-browsed ddclient debug-shell dhcpd dhcpd6 dhcrelay dhcrelay6 dirsrv@ dlm dnsmasq drbd
                    drbd-lvchange@ drbd-wait-promotable@ ebtables exchange-bmc-os-info fetchmail firewalld
                    fsidd gpm grub2-once haveged hawk hwloc-dump-hwdata ipmi ipmievd ipvsadm iscsi-init iscsid
                    isisd issue-add-ssh-keys kexec-load ksm kvm_stat ldirectord libvirt-guests logd lunmask
                    lvmlockd lvmlocks man-db-create mariadb mariadb@ multipathd named nfs nfs-blkmap
                    nfs-server nfsserver nmb openvpn@ ospf6d ospfd ostree-remount pacemaker racoon
                    racoon-setkey radvd rarpd@ ripd ripngd rpcbind rpmconfigcheck rsyncd rtkit-daemon sanlock
                    sbd sbd_remote serial-getty@ smartd_generate_opts smb snmpd snmptrapd spamd spampd
                    speech-dispatcherd squid srp_daemon srp_daemon_port@ strongswan strongswan-starter sysstat
                    systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-nspawn@
                    systemd-sysext systemd-time-wait-sync systemd-timesyncd tcsd udisks2
                    update-system-flatpaks upower virtinterfaced virtlockd virtlogd virtnetworkd virtnodedevd
                    virtnwfilterd virtsecretd virtstoraged vncserver@ vsftpd wdmd winbind wpa_supplicant@
                    xen-dom0-modules xen-init-dom0 xen-qemu-dom0-disk-backend xen-watchdog xenconsoled
                    xendomains xenstored zebra
   indirect         pcscd saned@ systemd-userdbd tftp uuidd wickedd

 ------------------------------------------------------------
 13. Linux kernel boot-time arguments, from /proc/cmdline
   BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
   root=UUID=31eb4e3c-f432-4a30-b618-dd595ca988cb
   splash=silent
   mitigations=auto
   quiet
   security=apparmor

 ------------------------------------------------------------
 14. cpupower frequency-info
   analyzing CPU 189:
     current policy: frequency should be within 1.50 GHz and 2.10 GHz.
                     The governor "performance" may decide which speed to use
                     within this range.
     boost state support:
       Supported: yes
       Active: yes
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
15. sysctl
  kernel.numa_balancing                  0
  kernel.randomize_va_space              0
  vm.compaction_proactiveness           20
  vm.dirty_background_bytes       314572800
  vm.dirty_background_ratio              0
  vm.dirty_bytes                         0
  vm.dirty_expire_centisecs           3000
  vm.dirty_ratio                         8
  vm.dirty_writeback_centisecs         500
  vm.dirtytime_expire_seconds        43200
  vm.extfrag_threshold                 500
  vm.min_unmapped_ratio                  1
  vm.nr_hugepages                        0
  vm.nr_hugepages_mempolicy              0
  vm.nr_overcommit_hugepages             0
  vm.swappiness                          1
  vm.watermark_boost_factor          15000
  vm.watermark_scale_factor             10
  vm.zone_reclaim_mode                   1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme5n1p3 ext4  2.9T   20G  2.7T   1% /

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        HPE ProLiant Compute DL325 Gen12
    Product Family: ProLiant
    Serial:         SANJACSCM

------------------------------------------------------------
21. dmidecode
```

(Continued on next page)

Platform Notes (Continued)

```
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    6x Micron MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400, configured at 5200
    6x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400, configured at 5200


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       HPE
    BIOS Version:      1.20
    BIOS Date:         07/11/2025
    BIOS Revision:     1.20
    Firmware Revision: 1.16
```

Compiler Version Notes

```
==============================================================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Benchmarks using both Fortran and C:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=200000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

(Continued on next page)

Base Other Flags (Continued)

Benchmarks using both Fortran and C:
`-Wno-return-type -Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-return-type -Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:
`clang`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

619.lbm_s: `basepeak = yes`

638.imagick_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining -fstruct-layout=9 -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

(Continued on next page)

Peak Optimization Flags (Continued)

644.nab_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -fscalar-transform -fvector-transform
-mllvm -reduce-array-computations=3 -Mrecursive
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm
-lamdalloc -lflang

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)

Peak Optimization Flags (Continued)

627.cam4_s (continued):
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -Mrecursive
-mrecip=none -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fscalar-transform
-fvector-transform -Mrecursive -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP
-fremap-arrays -fstrip-mining -fstruct-layout=9
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.7.html
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.7.xml
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-09-19 02:45:10-0400.
Report generated on 2025-11-05 12:07:54 by CPU2017 PS formatter v6716.
Originally published on 2025-11-04.