SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9655P)

SPECrate®2017_fp_base = 903

SPECrate®2017_fp_peak = 948

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2025
Hardware Availability: Oct-2024
Software Availability: Sep-2025

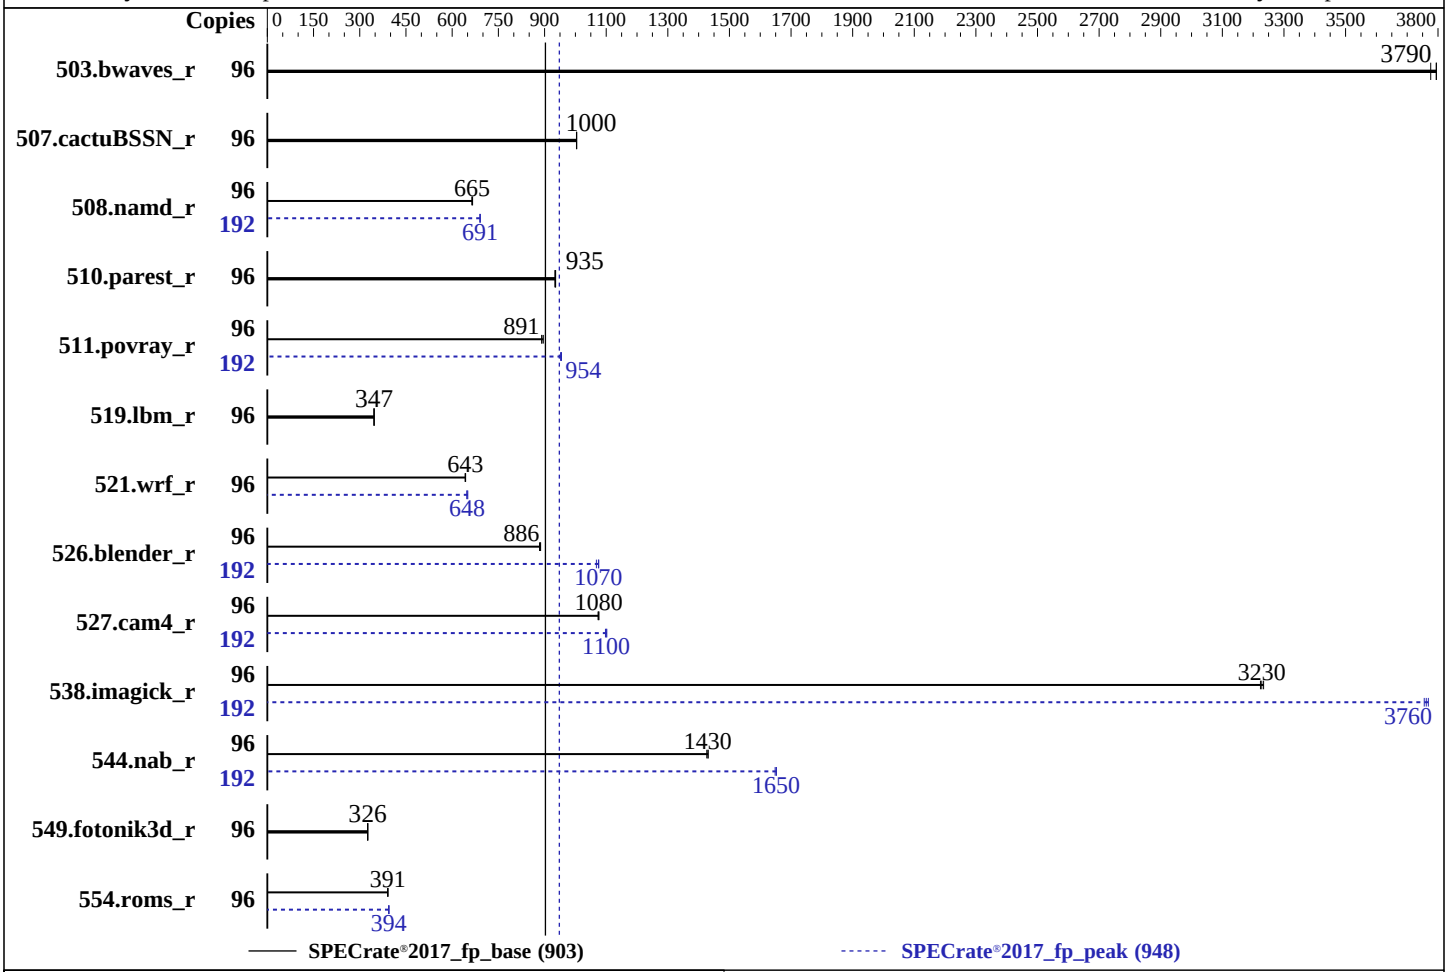

Hardware

CPU Name:	AMD EPYC 9655P
Max MHz:	4500
Nominal:	2600
Enabled:	96 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	768 GB (12 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 5.8 TB NVMe SSD
Other:	CPU Cooling: Air

Software

OS:	Ubuntu 24.04.3 LTS Kernel 6.8.0-85-generic
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	No
Firmware:	Version 1.5a released Aug-2025
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	255	3780	254	3790	**254**	**3790**	96	255	3780	254	3790	**254**	**3790**
507.cactuBSSN_r	96	**121**	**1000**	121	1000	121	1000	96	**121**	**1000**	121	1000	121	1000
508.namd_r	96	137	664	**137**	**665**	137	666	192	**264**	**691**	264	691	264	690
510.parest_r	96	269	933	**268**	**935**	268	936	96	269	933	**268**	**935**	268	936
511.povray_r	96	252	891	**252**	**891**	250	896	192	471	952	470	955	**470**	**954**
519.lbm_r	96	293	346	292	347	**292**	**347**	96	293	346	292	347	**292**	**347**
521.wrf_r	96	334	644	**334**	**643**	335	642	96	332	648	**332**	**648**	330	651
526.blender_r	96	165	884	**165**	**886**	165	887	192	**272**	**1070**	272	1080	274	1070
527.cam4_r	96	156	1070	**156**	**1080**	156	1080	192	306	1100	305	1100	**305**	**1100**
538.imagick_r	96	74.1	3220	**74.0**	**3230**	73.8	3230	192	**127**	**3760**	127	3770	127	3760
544.nab_r	96	113	1430	**113**	**1430**	113	1430	192	196	1650	196	1650	**196**	**1650**
549.fotonik3d_r	96	1149	326	**1148**	**326**	1147	326	96	1149	326	**1148**	**326**	1147	326
554.roms_r	96	390	392	**390**	**391**	391	391	96	386	395	387	394	**387**	**394**

SPECrate®2017_fp_base = 903

SPECrate®2017_fp_peak = 948

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
```

(Continued on next page)

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
      "/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Settings:
NUMA Nodes Per Socket = NPS4
Determinism Control = Manual
Determinism Enable = Performance
TDP Control = Manual
TDP = 400
Package Power Limit Control = Manual
Package Power Limit = 400
Memory Target Speed = DDR6400
Workload Profile = HPC

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on lab Thu Oct 16 09:18:42 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.11)
```

(Continued on next page)

Platform Notes (Continued)

```
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux lab 6.8.0-85-generic #85-Ubuntu SMP PREEMPT_DYNAMIC Thu Sep 18 15:26:59 UTC 2025 x86_64 x86_64 x86_64
  GNU/Linux

------------------------------------------------------------
2. w
   09:18:42 up  5:48,  1 user,  load average: 125.99, 175.58, 185.20
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU  WHAT
  lab      tty2     -                03:32   96days  0.00s   ?    /usr/libexec/gnome-session-binary
  --session=ubuntu

------------------------------------------------------------
3. Username
  From environment variable $USER:  root
  From the command 'logname':       lab

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              3093871
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 /usr/lib/systemd/systemd --user
 /usr/libexec/gnome-terminal-server
 bash
 sudo su -
 sudo su -
 su -
 -bash
 python3 ./run_amd_rate_aocc500_znver5_A1.py
 /bin/bash ./amd_rate_aocc500_znver5_A1.sh
 runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
 runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
```

(Continued on next page)

Platform Notes (Continued)

```
   --runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9655P 96-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 2
    stepping        : 1
    microcode       : 0xb002147
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 192 4K pages
    cpu cores       : 96
    siblings        : 192
    1 physical ids (chips)
    192 processors (hardware threads)
    physical id 0: core ids 0-95
    physical id 0: apicids 0-191
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               192
  On-line CPU(s) list:                  0-191
  Vendor ID:                            AuthenticAMD
  BIOS Vendor ID:                       Advanced Micro Devices, Inc.
  Model name:                           AMD EPYC 9655P 96-Core Processor
  BIOS Model name:                      AMD EPYC 9655P 96-Core Processor                Unknown CPU @ 2.6GHz
  BIOS CPU family:                      107
  CPU family:                           26
  Model:                                2
  Thread(s) per core:                   2
  Core(s) per socket:                   96
  Socket(s):                            1
  Stepping:                             1
  BogoMIPS:                             5200.18
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                        rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                        extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                        sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                        cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                        osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                        perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                        ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                        smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                        cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                        xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
```


(Continued on next page)

Platform Notes (Continued)

```
                                svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
                                vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                flush_l1d debug_swap
  Virtualization:               AMD-V
  L1d cache:                    4.5 MiB (96 instances)
  L1i cache:                    3 MiB (96 instances)
  L2 cache:                     96 MiB (96 instances)
  L3 cache:                     384 MiB (12 instances)
  NUMA node(s):                 4
  NUMA node0 CPU(s):            0-23,96-119
  NUMA node1 CPU(s):            24-47,120-143
  NUMA node2 CPU(s):            48-71,144-167
  NUMA node3 CPU(s):            72-95,168-191
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     4.5M   12 Data            1    64        1             64
     L1i       32K       3M    8 Instruction     1    64        1             64
     L2         1M      96M   16 Unified         2  1024        1             64
     L3        32M     384M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-23,96-119
  node 0 size: 193100 MB
  node 0 free: 191090 MB
  node 1 cpus: 24-47,120-143
  node 1 size: 193476 MB
  node 1 free: 191554 MB
  node 2 cpus: 48-71,144-167
  node 2 size: 193519 MB
  node 2 free: 191704 MB
  node 3 cpus: 72-95,168-191
  node 3 size: 193457 MB
  node 3 free: 191141 MB
  node distances:
  node   0   1   2   3
    0:  10  12  12  12
    1:  12  10  12  12
    2:  12  12  10  12
```

(Continued on next page)

Platform Notes (Continued)

```
     3:  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       792119432 kB

------------------------------------------------------------
10. who -r
  run-level 5 Oct 16 03:32

------------------------------------------------------------
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.11)
  Default Target  Status
  graphical       degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                                LOAD   ACTIVE SUB    DESCRIPTION
  * systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured
  Legend: LOAD   -> Reflects whether the unit definition was properly loaded.
          ACTIVE -> The high-level unit activation state, i.e. generalization of SUB.
          SUB    -> The low-level unit activation state, values depend on unit type.
  1 loaded units listed.

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                   accounts-daemon anacron apparmor apport avahi-daemon blk-availability bluetooth
                   cloud-config cloud-final cloud-init cloud-init-local console-setup cron cups cups-browsed
                   dmesg e2scrub_reap finalrd getty@ gnome-remote-desktop gpu-manager grub-common
                   grub-initrd-fallback kerneloops keyboard-setup lvm2-monitor multipathd networkd-dispatcher
                   open-iscsi open-vm-tools openvpn pollinate power-profiles-daemon rsyslog secureboot-db
                   setvtrgb snapd ssl-cert sssd switcheroo-control sysstat systemd-networkd
                   systemd-networkd-wait-online systemd-oomd systemd-pstore systemd-resolved
                   systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 unattended-upgrades
                   vgauth vsftpd wpa_supplicant
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         brltty console-getty debug-shell iscsid nftables openvpn-client@ openvpn-server@ openvpn@
                   rsync rtkit-daemon serial-getty@ speech-dispatcherd systemd-boot-check-no-failures
                   systemd-confext systemd-network-generator systemd-networkd-wait-online@
                   systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config
                   systemd-pcrlock-machine-id systemd-pcrlock-make-policy
                   systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
                   systemd-time-wait-sync ufw upower wpa_supplicant-nl80211@ wpa_supplicant-wired@
                   wpa_supplicant@
  generated        speech-dispatcher
  indirect         saned@ spice-vdagentd sssd-autofs sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
                   systemd-sysupdate systemd-sysupdate-reboot uuidd
  masked           alsa-utils cryptdisks cryptdisks-early hwclock multipath-tools-boot saned screen-cleanup
                   sudo x11-common

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.8.0-85-generic
  root=UUID=0263fb39-25a0-493b-8d80-c82422be8aef
  ro

------------------------------------------------------------
15. cpupower frequency-info
```

(Continued on next page)

Platform Notes (Continued)

```
  analyzing CPU 111:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  2600MHz

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          0
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                     8
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                      1
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 24.04.3 LTS

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p2 ext4  5.8T   24G  5.5T   1% /

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 21. /sys/devices/virtual/dmi/id
     Vendor:         Supermicro
     Product:        Super Server
     Product Family: SMC H14
     Serial:         0123456789

 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     6x Samsung M321R8GA0PB1-CCPQC 64 GB 2 rank 6400
     6x Samsung M321R8GA0PB1-CCPYC 64 GB 2 rank 6400


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      1.5a
    BIOS Date:         08/11/2025
    BIOS Revision:     5.35
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

(Continued on next page)

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

C++ benchmarks:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl

Benchmarks using both Fortran and C:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Benchmarks using both C and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl

Benchmarks using Fortran, C, and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Base Other Flags

C benchmarks:
`-Wno-unused-command-line-argument`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

519.lbm_r: `basepeak = yes`

538.imagick_r: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc -ldl`

544.nab_r: `-m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc -ldl`

C++ benchmarks:

508.namd_r: `-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc -ldl`

510.parest_r: `basepeak = yes`

Fortran benchmarks:

503.bwaves_r: `basepeak = yes`

549.fotonik3d_r: `basepeak = yes`

554.roms_r: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto -Mrecursive -mllvm -reduce-array-computations=3 -fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc -ldl -lflang`

(Continued on next page)

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

521.wrf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

Benchmarks using both C and C++:

511.povray_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc -ldl

526.blender_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50

(Continued on next page)

Peak Optimization Flags (Continued)

526.blender_r (continued):
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument

Benchmarks using both C and C++:
-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Turin-revE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Turin-revE.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-10-16 05:18:41-0400.
Report generated on 2025-11-05 12:09:19 by CPU2017 PS formatter v6716.
Originally published on 2025-11-04.