SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6900 G7 (Intel Xeon 6738P)

SPECspeed®2017_int_base = 15.3

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025
Hardware Availability: Dec-2025
Software Availability: Jun-2025

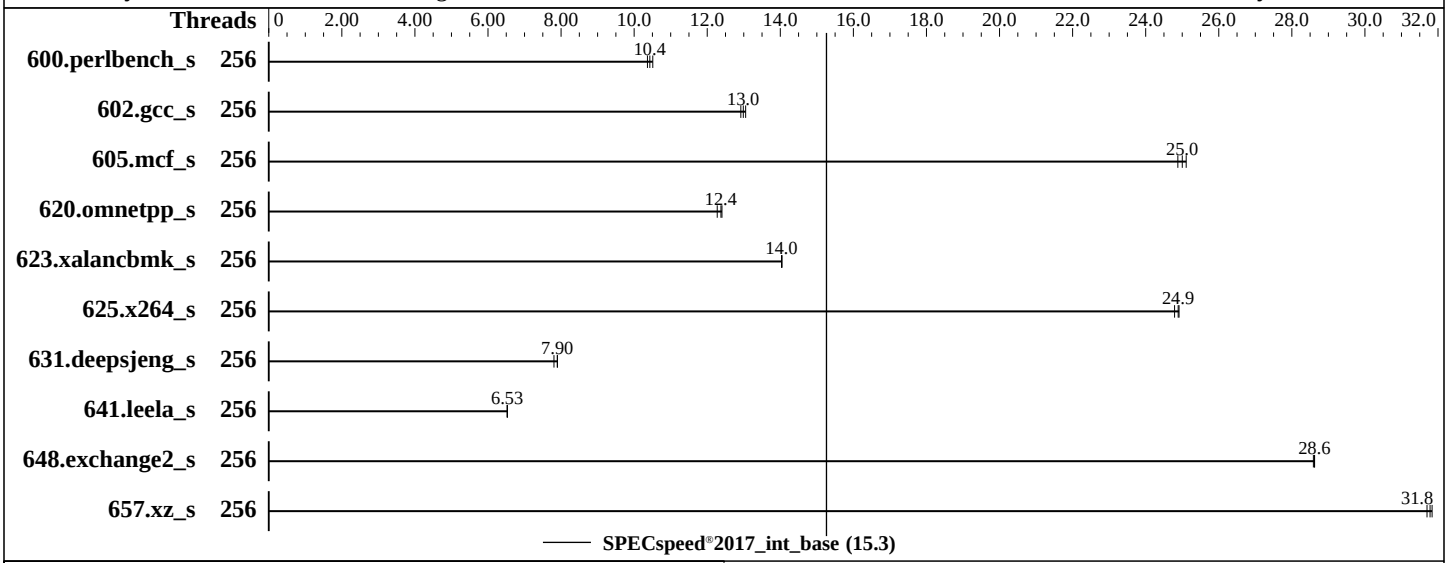

Hardware

CPU Name:	Intel Xeon 6738P
Max MHz:	4200
Nominal:	2900
Enabled:	128 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	144 MB I+D on chip per chip
Other:	None
Memory:	1 TB (32 x 32 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 960 GB SATA SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP7 6.4.0-150700.51-default
Compiler:	C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	Version 7.00.19 released Sep-2025 BIOS
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6900 G7 (Intel Xeon 6738P)

SPECspeed®2017_int_base = 15.3

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025
Hardware Availability: Dec-2025
Software Availability: Jun-2025

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	256	171	10.4	**170**	**10.4**	169	10.5							
602.gcc_s	256	308	12.9	305	13.1	**307**	**13.0**							
605.mcf_s	256	**189**	**25.0**	190	24.9	188	25.1							
620.omnetpp_s	256	133	12.3	**132**	**12.4**	131	12.4							
623.xalancbmk_s	256	**101**	**14.0**	101	14.0	101	14.0							
625.x264_s	256	70.8	24.9	71.2	24.8	**70.9**	**24.9**							
631.deepsjeng_s	256	**181**	**7.90**	184	7.81	181	7.90							
641.leela_s	256	**261**	**6.53**	261	6.53	261	6.53							
648.exchange2_s	256	103	28.6	**103**	**28.6**	103	28.6							
657.xz_s	256	194	31.8	195	31.7	**195**	**31.8**							

SPECspeed®2017_int_base = 15.3

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
 SNC = Enable
 LLC Prefetch = Enabled
 ACPI C6x Enumeration =  C6 as ACPI C2
BMC Settings:
 Fan mode = powerful mode

 Sysinfo program /home/speccpu/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Thu Oct 16 01:14:12 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611/lp)
   x86_64 x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    01:14:12 up  2:54,  1 user,  load average: 0.06, 0.05, 0.01
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   root     tty1     -                01:10   36.00s  0.83s  0.00s -bash

 ------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

 ------------------------------------------------------------
 4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority             (-e) 0
```

(Continued on next page)

Platform Notes (Continued)

```
   file size               (blocks, -f) unlimited
   pending signals                 (-i) 4125996
   max locked memory       (kbytes, -l) 8192
   max memory size         (kbytes, -m) unlimited
   open files                      (-n) 1024
   pipe size            (512 bytes, -p) 8
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 4125996
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 login -- root
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=128 --tune base -o all --define
   intspeedaffinity --define smt-on --define drop_caches intspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=128 --tune base --output_format all --define
   intspeedaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base --size
   refspeed intspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.013/templogs/preenv.intspeed.013.0.log --lognum 013.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6738P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x10003d0
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
    cpu cores       : 32
    siblings        : 64
    4 physical ids (chips)
    256 processors (hardware threads)
    physical id 0: core ids 0-31
    physical id 1: core ids 0-31
    physical id 2: core ids 0-31
    physical id 3: core ids 0-31
    physical id 0: apicids 0-63
    physical id 1: apicids 128-191
    physical id 2: apicids 256-319
    physical id 3: apicids 384-447
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.40.4:
  Architecture:                         x86_64
```

(Continued on next page)

Platform Notes (Continued)

```
CPU op-mode(s):                  32-bit, 64-bit
Address sizes:                   52 bits physical, 57 bits virtual
Byte Order:                      Little Endian
CPU(s):                          256
On-line CPU(s) list:             0-255
Vendor ID:                       GenuineIntel
Model name:                      Intel(R) Xeon(R) 6738P
CPU family:                      6
Model:                           173
Thread(s) per core:              2
Core(s) per socket:              32
Socket(s):                       4
Stepping:                        1
CPU(s) scaling MHz:              22%
CPU max MHz:                     4200.0000
CPU min MHz:                     800.0000
BogoMIPS:                        5800.00
Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                 pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                 pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                 nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                 pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                                 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                 tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                                 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                                 vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                                 rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                                 intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                                 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                 split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                 arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi
                                 umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
                                 avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                                 cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk
                                 pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                                 arch_capabilities
Virtualization:                  VT-x
L1d cache:                       6 MiB (128 instances)
L1i cache:                       8 MiB (128 instances)
L2 cache:                        256 MiB (128 instances)
L3 cache:                        576 MiB (4 instances)
NUMA node(s):                    4
NUMA node0 CPU(s):               0-31,128-159
NUMA node1 CPU(s):               32-63,160-191
NUMA node2 CPU(s):               64-95,192-223
NUMA node3 CPU(s):               96-127,224-255
Vulnerability Gather data sampling:   Not affected
Vulnerability Itlb multihit:          Not affected
Vulnerability L1tf:                   Not affected
Vulnerability Mds:                    Not affected
Vulnerability Meltdown:               Not affected
Vulnerability Mmio stale data:        Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:               Not affected
Vulnerability Spec rstack overflow:   Not affected
Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                 PBRSB-eIBRS Not affected; BHI BHI_DIS_S
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Srbds:                 Not affected
  Vulnerability Tsx async abort:       Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       6M   12 Data            1     64        1             64
     L1i       64K       8M   16 Instruction     1     64        1             64
     L2         2M     256M   16 Unified         2   2048        1             64
     L3       144M     576M   16 Unified         3 147456        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-31,128-159
  node 0 size: 257557 MB
  node 0 free: 256845 MB
  node 1 cpus: 32-63,160-191
  node 1 size: 257992 MB
  node 1 free: 256735 MB
  node 2 cpus: 64-95,192-223
  node 2 size: 258030 MB
  node 2 free: 257443 MB
  node 3 cpus: 96-127,224-255
  node 3 size: 257948 MB
  node 3 free: 257248 MB
  node distances:
  node   0   1   2   3
    0:  10  21  21  21
    1:  21  10  21  21
    2:  21  21  10  21
    3:  21  21  21  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056285740 kB

------------------------------------------------------------
10. who -r
  run-level 3 Oct 15 22:20

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
                   bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog
                   lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
                   wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
  enabled-runtime  systemd-remount-fs
  disabled         NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
                   autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
                   chrony-wait chronyd console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq
                   ebtables exchange-bmc-os-info firewalld fsidd gnome-remote-desktop gpm grub2-once haveged
                   ipmi ipmievd issue-add-ssh-keys kexec-load ksm kvm_stat lunmask man-db-create multipathd
                   nfs nfs-blkmap nmb openvpn@ ostree-remount ostree-state-overlay@ rpcbind rpmconfigcheck
```

(Continued on next page)

Platform Notes (Continued)

```
                  rsyncd rtkit-daemon samba-bgqd serial-getty@ smartd_generate_opts smb snmpd snmptrapd
                  speech-dispatcherd systemd-boot-check-no-failures systemd-confext
                  systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
                  update-system-flatpaks upower vncserver@ wpa_supplicant@
  indirect        pcscd saned@ systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
  root=UUID=caa76791-ac18-477b-958c-517956aed673
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 223:
    current policy: frequency should be within 800 MHz and 4.20 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
```

(Continued on next page)

Platform Notes (Continued)

```
  max_ptes_swap             64
  pages_to_scan           4096
  scan_sleep_millisecs   10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP7

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/speccpu
  Filesystem     Type   Size  Used Avail Use% Mounted on
  /dev/sda2      btrfs  892G  108G  784G  13% /home

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         New H3C Technologies Co., Ltd.
    Product:        H3C UniServer R6900 G7
    Product Family: Rack
    Serial:         210200A0DXH259000003

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    27x Hynix HMCG88AHBRA290N 32 GB 2 rank 6400
    5x Hynix HMCG88AHBRA478N 32 GB 2 rank 6400


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      7.00.19
   BIOS Date:         09/26/2025
   BIOS Revision:     5.35
   Firmware Revision: 2.10
```

Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base) 657.xz_s(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base) 641.leela_s(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Fortran | 648.exchange2_s(base)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html
http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-Intel-GNR-RevC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml
http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-Intel-GNR-RevC.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-10-15 13:14:12-0400.
Report generated on 2025-11-05 12:10:32 by CPU2017 PS formatter v6716.
Originally published on 2025-11-04.