



SPEC CPU®2017 Integer Rate Result


Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017_int_base = 35.1
SPECrate®2017_int_energy_base = 271
SPECrate®2017_int_peak = 36.2
SPECrate®2017_int_energy_peak = 280

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Feb-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

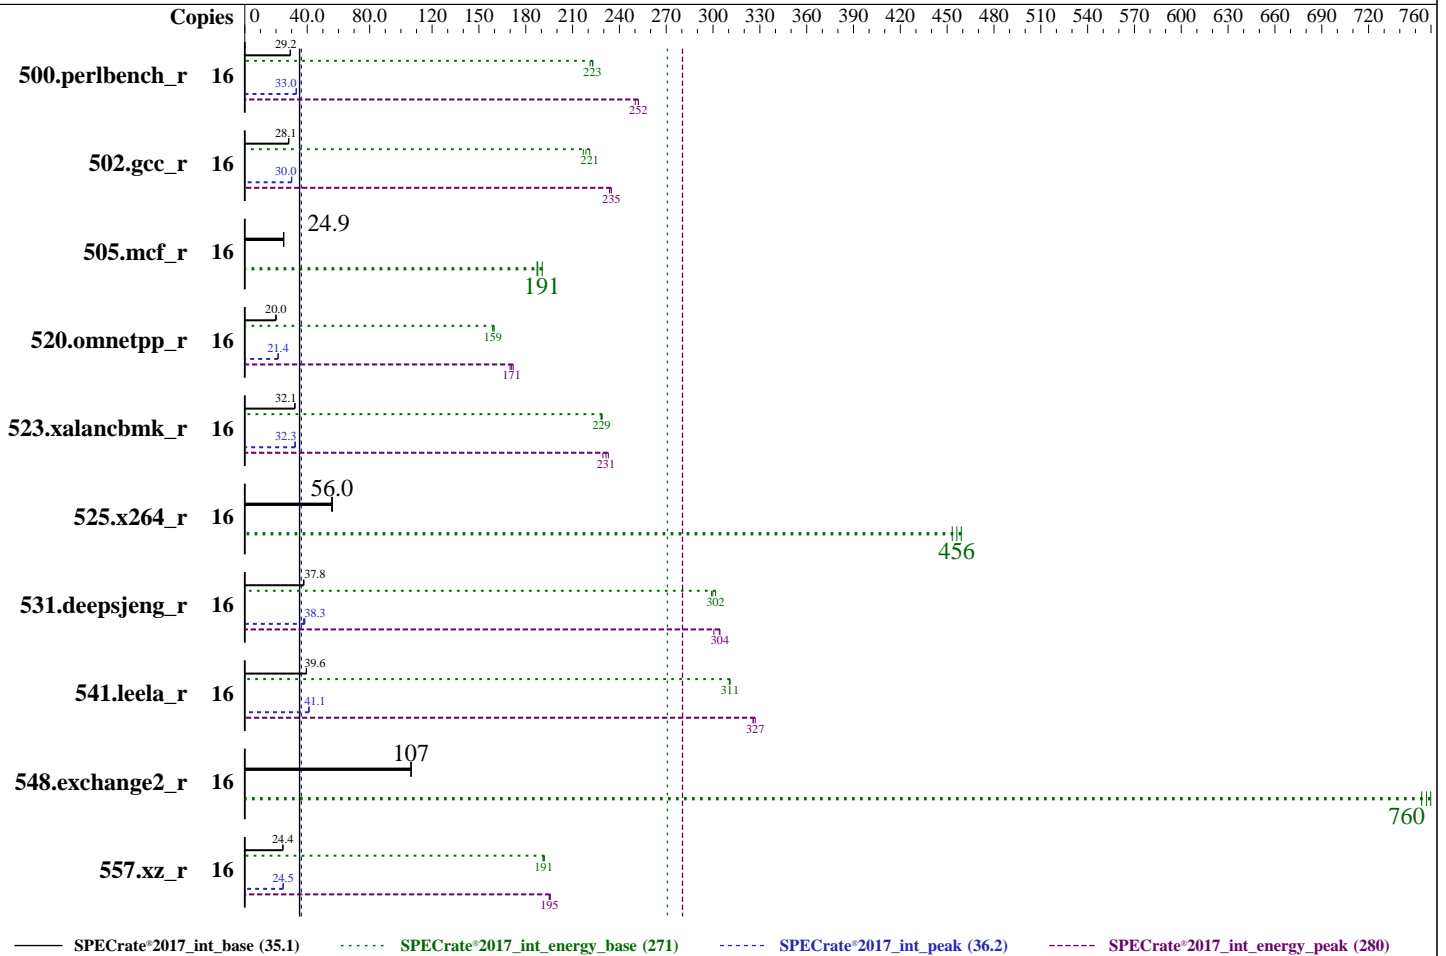

Hardware

CPU Name: Ampere eMAG 8180
Max MHz: 3300
Nominal: 3000
Enabled: 32 cores, 1 chip
Orderable: 1 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 4 MB I+D on chip per chip (256 KiB shared / 2 cores)
L3: 32 MB I+D on chip per chip
Other: None
Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2666V-R)
Storage: 1 x 480 GB SATA SSD
Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.1 LTS kernel 6.8.0 (64KB pages)
Compiler: C/C++/Fortran: Version 15.2.0 of GCC
Parallel: No
Firmware: Version 1.12 released Nov-2019
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc v5.3+, commit hash 1972241
Power Management: OS CPU governor set to "performance"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017_int_base = 35.1
SPECrate®2017_int_energy_base = 271
SPECrate®2017_int_peak = 36.2
SPECrate®2017_int_energy_peak = 280

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Feb-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Power

Max. Power (W): 173.22
Idle Power (W): 76.47
Min. Temperature (C): 20.75
Elevation (m): 60
Line Standard: 120 V / 60 Hz / 1 phase / 2 wire
Provisioning: Line powered

Power Settings

Management FW: Version 11.05.111 of Falcon BMC
Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 1 x 550 W (non-redundant)
Details: Lenovo 03LD785 550 Watt High Efficiency Platinum AC Power Supply
Backplane: N/A
Other Storage: N/A
Storage Model #s: 1 x Lenovo 01PE965 (480GB SATA SSD) connected to on-board HBA
NICs Installed: 1 x Lenovo 01PE857 @ 10 GbE (2 ports ethernet)
NICs Enabled (FW/OS): 2 / 1
NICs Connected/Speed: 1 @ 1 Gbps
Other HW Model #s: --

Power Analyzer

Power Analyzer: cpu-reference-ptd:8000
Hardware Vendor: Yokogawa
Model: YokogawaWT310E
Serial Number: T11733385
Input Connection: Serial over USB
Metrology Institute: NIST
Calibration By: Yokogawa USA
Calibration Label: T126622
Calibration Date: 18-Aug-2025
PTDaemon® Version: 1.11.3 (0c074d7d; 2025-10-15)
Setup Description: Directly connected
Current Ranges Used: 5A
Voltage Range Used: 150V

Temperature Meter

Temperature Meter: cpu-reference-ptd:9000
Hardware Vendor: PCSensor
Model: USB9097+DS18B20
Serial Number: --
Input Connection: USB
PTDaemon Version: 1.11.3 (0c074d7d; 2025-10-15)
Setup Description: In front of SUT front panel primary air inlet

Base Results Table

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
500.perlbench_r	16	874	29.2	124	223	142	151	871	29.2	124	223	142	152	875	29.1	125	221	143	151
502.gcc_r	16	806	28.1	111	221	138	156	808	28.1	113	217	140	159	804	28.2	113	219	140	157
505.mcf_r	16	1040	24.9	148	191	143	154	1043	24.8	151	187	145	157	1035	25.0	151	188	146	157
520.omnetpp_r	16	1053	19.9	142	160	135	137	1052	20.0	143	159	136	140	1052	20.0	143	159	136	140
523.xalancbmk_r	16	527	32.1	79.9	229	152	173	527	32.1	80.0	229	152	173	527	32.1	80.2	228	152	173
525.x264_r	16	500	56.0	66.2	459	132	139	503	55.7	67.0	453	133	140	500	56.0	66.6	456	133	138
531.deepsjeng_r	16	486	37.8	66.1	302	136	143	486	37.7	66.7	299	137	144	485	37.8	66.5	300	137	144
541.leela_r	16	673	39.4	92.2	311	137	142	670	39.6	92.3	310	138	143	670	39.6	92.2	311	138	142
548.exchange2_r	16	393	107	60.3	754	153	157	394	106	60.0	757	152	156	394	107	59.8	760	152	156
557.xz_r	16	709	24.4	97.9	192	138	150	710	24.4	98.1	191	138	149	710	24.4	98.3	191	139	150

SPECrate®2017_int_base = 35.1

SPECrate®2017_int_energy_base = 271

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017_int_base = 35.1
SPECrate®2017_int_energy_base = 271
SPECrate®2017_int_peak = 36.2
SPECrate®2017_int_energy_peak = 280

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Feb-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Peak Results Table

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
500.perlbenc_r	16	775	32.9	110	250	143	151	<u>771</u>	<u>33.0</u>	<u>110</u>	<u>252</u>	<u>142</u>	<u>150</u>	770	33.1	110	252	142	154
502.gcc_r	16	756	30.0	105	234	139	158	<u>756</u>	<u>30.0</u>	<u>105</u>	<u>235</u>	<u>139</u>	<u>158</u>	754	30.0	105	234	139	158
505.mcf_r	16	<u>1040</u>	<u>24.9</u>	<u>148</u>	<u>191</u>	<u>143</u>	<u>154</u>	1043	24.8	151	187	145	157	1035	25.0	151	188	146	157
520.omnetpp_r	16	984	21.3	134	170	136	138	<u>983</u>	<u>21.4</u>	<u>133</u>	<u>171</u>	<u>135</u>	<u>145</u>	983	21.4	132	172	135	143
523.xalancbmk_r	16	525	32.2	79.8	229	152	171	524	32.3	78.6	233	150	171	<u>524</u>	<u>32.3</u>	<u>79.1</u>	<u>231</u>	<u>151</u>	<u>172</u>
525.x264_r	16	500	56.0	66.2	459	132	139	503	55.7	67.0	453	133	140	<u>500</u>	<u>56.0</u>	<u>66.6</u>	<u>456</u>	<u>133</u>	<u>138</u>
531.deepsjeng_r	16	<u>479</u>	<u>38.3</u>	<u>65.5</u>	<u>304</u>	<u>137</u>	<u>144</u>	477	38.5	65.6	304	138	146	487	37.6	66.3	301	136	144
541.leela_r	16	645	41.1	88.0	326	136	142	645	41.1	88.0	326	137	142	<u>645</u>	<u>41.1</u>	<u>87.7</u>	<u>327</u>	<u>136</u>	<u>142</u>
548.exchange2_r	16	393	107	60.3	754	153	157	394	106	60.0	757	152	156	<u>394</u>	<u>107</u>	<u>59.8</u>	<u>760</u>	<u>152</u>	<u>156</u>
557.xz_r	16	<u>704</u>	<u>24.5</u>	<u>96.2</u>	<u>195</u>	<u>137</u>	<u>153</u>	704	24.5	96.3	195	137	152	705	24.5	95.9	196	136	154

SPECrate®2017_int_peak = 36.2

SPECrate®2017_int_energy_peak = 280

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/usr/lib64:/usr/lib:/lib64:/home/mjm/jemalloc/lib"

General Notes

jemalloc is a general purpose malloc(3) implementation that emphasizes fragmentation avoidance and scalable concurrency support.
sources available from <https://github.com/facebook/jemalloc/tree/1972241>
and built via "../configure --with-lg-quantum=3" which used system gcc-14 -O3

This benchmark result is intended to provide perspective on past power and/or performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

Platform Notes

Sysinfo program /home/mjm/cpu2017/bin/sysinfo

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017_int_base = 35.1
SPECrate®2017_int_energy_base = 271
SPECrate®2017_int_peak = 36.2
SPECrate®2017_int_energy_peak = 280

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Feb-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Platform Notes (Continued)

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on emag Fri Feb 27 06:53:18 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.8)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. sysctl
15. /sys/kernel/mm/transparent_hugepage
16. /sys/kernel/mm/transparent_hugepage/khugepaged
17. OS release
18. Disk information
19. /sys/devices/virtual/dmi/id
20. dmidecode
21. BIOS

1. uname -a
Linux emag 6.8.0 #1 SMP PREEMPT_DYNAMIC Fri Feb 28 00:25:30 UTC 2025 aarch64 aarch64 aarch64 GNU/Linux

2. w
06:53:18 up 70 days, 7:18, 3 users, load average: 0.75, 0.82, 0.92
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
mjm 10.13.114.186 28Jan26 24:43m 0.00s 0.02s sshd: mjm [priv]
mjm 10.41.107.182 20:04 24:43m 0.00s 0.02s sshd: mjm [priv]

3. Username
From environment variable \$USER: mjm

4. ulimit -a
time(seconds) unlimited
file(blocks) unlimited
data(kbytes) unlimited
stack(kbytes) unlimited
coredump(blocks) 0
memory(kbytes) unlimited
locked memory(kbytes) 16691648
process 128681
nofiles 1024

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017_int_base = 35.1
SPECrate®2017_int_energy_base = 271
SPECrate®2017_int_peak = 36.2
SPECrate®2017_int_energy_peak = 280

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Feb-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Platform Notes (Continued)

vmemory(kbytes) unlimited
locks unlimited
rtprio 0

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --system --deserialize=66
SCREEN
-bin/tcsh
runcpu --flagsurl=$SPEC/gcc.2024-08-14.xml --reportable -c emag-ofast-gcc15 --tune=base,peak -n 3 -C 16
intrate
runcpu --flagsurl $SPEC/gcc.2024-08-14.xml --reportable --configfile emag-ofast-gcc15 --tune base,peak
--iterations 3 --copies 16 --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv
--logfile $SPEC/tmp/CPU2017.092/temlogs/preenv.intrate.092.0.log --lognum 092.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo -f
$SPEC = /home/mjm/cpu2017
-----
```

```
-----
6. /proc/cpuinfo
CPU implementer : 0x50
CPU architecture: 8
CPU variant : 0x3
CPU part : 0x000
CPU revision : 2
Features : fp asimd evtstrm aes pmull sha1 sha2 crc32 cpuid
-----
```

7. lscpu

```
From lscpu from util-linux 2.39.3:
Architecture: aarch64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 32
On-line CPU(s) list: 0-31
Vendor ID: APM
Model name: -
Model: 2
Thread(s) per core: 1
Core(s) per socket: 32
Socket(s): 1
Stepping: 0x3
Frequency boost: disabled
CPU(s) scaling MHz: 100%
CPU max MHz: 2911.7639
CPU min MHz: 363.9700
BogoMIPS: 80.00
Flags: fp asimd evtstrm aes pmull sha1 sha2 crc32 cpuid
L1d cache: 1 MiB (32 instances)
L1i cache: 1 MiB (32 instances)
L2 cache: 4 MiB (16 instances)
NUMA node(s): 1
NUMA node0 CPU(s): 0-31
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017_int_base = 35.1
SPECrate®2017_int_energy_base = 271
SPECrate®2017_int_peak = 36.2
SPECrate®2017_int_energy_peak = 280

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Feb-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Platform Notes (Continued)

Vulnerability Meltdown: Mitigation; PTI
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Vulnerable
Vulnerability Spectre v1: Mitigation; __user pointer sanitization
Vulnerability Spectre v2: Vulnerable
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1			
L1i	32K	1M	8	Instruction	1			
L2	256K	4M	32	Unified	2			

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0-31
node 0 size: 130403 MB
node 0 free: 109712 MB
node distances:
node 0
0: 10

9. /proc/meminfo

MemTotal: 133533376 kB

10. who -r

run-level 5 Dec 18 23:35

11. Systemd service manager version: systemd 255 (255.4-lubuntu8.8)

Default Target Status
graphical running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate power-profiles-daemon rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell ipmievd iscsid nftables rsync ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext systemd-time-wait-sync
generated	openipmi perlbal

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017_int_base = 35.1
SPECrate®2017_int_energy_base = 271
SPECrate®2017_int_peak = 36.2
SPECrate®2017_int_energy_peak = 280

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Feb-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Platform Notes (Continued)

indirect serial-getty@ systemd-sysupdate systemd-sysupdate-reboot uidd
masked cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.8.0
root=UUID=16268541-06d0-4374-97ca-2d512d4db26f
ro
cma=1024M
iommu.passthrough=1

14. sysctl
kernel.numa_balancing 0
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

15. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled always [madvice] never
hpage_pmd_size 536870912
shmem_enabled always within_size advise [never] deny force

16. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 8191
max_ptes_shared 4096
max_ptes_swap 1024
pages_to_scan 65536
scan_sleep_millisecs 10000

17. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.1 LTS

18. Disk information

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017_int_base = 35.1
SPECrate®2017_int_energy_base = 271
SPECrate®2017_int_peak = 36.2
SPECrate®2017_int_energy_peak = 280

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Feb-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Platform Notes (Continued)

SPEC is set to: /home/mjm/cpu2017

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext4 439G 287G 130G 69% /
```

19. /sys/devices/virtual/dmi/id

```
Vendor: Lenovo
Product: HR330A 7X33CT01WW
Product Family: Lenovo ThinkSystem HR330A/HR350A
```

20. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
8x Samsung M393A2K43CB2-CTD 16 GB 2 rank 2667
```

21. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor: LENOVO
BIOS Version: HVE104N-1.12
BIOS Date: 11/29/2019
BIOS Revision: 1.12
Firmware Revision: 1.7
```

Power Settings Notes

OS CPU governor was set using the command:

```
echo performance | tee /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor
```

Compiler Version Notes

```
=====  
C | 500.perlbench_r(base, peak) 502.gcc_r(base, peak) 505.mcf_r(base, peak) 525.x264_r(base, peak)  
| 557.xz_r(base, peak)  
=====
```

gcc (GCC) 15.2.0

Copyright (C) 2025 Free Software Foundation, Inc.

This is free software; see the source for copying conditions. There is NO warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

```
=====  
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)  
| 541.leela_r(base, peak)  
=====
```

g++ (GCC) 15.2.0

Copyright (C) 2025 Free Software Foundation, Inc.

This is free software; see the source for copying conditions. There is NO warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017_int_base = 35.1
SPECrate®2017_int_energy_base = 271
SPECrate®2017_int_peak = 36.2
SPECrate®2017_int_energy_peak = 280

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Feb-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Compiler Version Notes (Continued)

Fortran | 548.exchange2_r(base, peak)

GNU Fortran (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

Base Compiler Invocation

C benchmarks:

gcc

C++ benchmarks:

g++

Fortran benchmarks:

gfortran

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_AARCH64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-mabi=lp64 -std=c99 -g -Ofast -mcpu=native -flto=16
-fno-strict-aliasing -fno-unsafe-math-optimizations
-fno-finite-math-only -fgnu89-inline -L/home/mjm/jemalloc/lib
-ljemalloc

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017_int_base = 35.1
SPECrate®2017_int_energy_base = 271
SPECrate®2017_int_peak = 36.2
SPECrate®2017_int_energy_peak = 280

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Feb-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Base Optimization Flags (Continued)

C++ benchmarks:

```
-mabi=lp64 -std=c++03 -g -Ofast -mcpu=native -flto=16  
-L/home/mjm/jemalloc/lib -ljemalloc
```

Fortran benchmarks:

```
-mabi=lp64 -g -Ofast -mcpu=native -flto=16 -L/home/mjm/jemalloc/lib  
-ljemalloc
```

Base Other Flags

C benchmarks:

```
-fcommon
```

C++ benchmarks:

```
-Wno-error=template-body
```

Peak Compiler Invocation

C benchmarks:

```
gcc
```

C++ benchmarks:

```
g++
```

Fortran benchmarks:

```
gfortran
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017_int_base = 35.1
SPECrate®2017_int_energy_base = 271
SPECrate®2017_int_peak = 36.2
SPECrate®2017_int_energy_peak = 280

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Feb-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -mabi=lp64 -std=c99 -fprofile-generate -fprofile-use -g  
-Ofast -mcpu=native -flto=16 -fno-strict-aliasing  
-fno-unsafe-math-optimizations -fno-finite-math-only  
-L/home/mjm/jemalloc/lib -ljemalloc
```

```
502.gcc_r: -mabi=lp64 -std=c99 -fprofile-generate -fprofile-use -g  
-Ofast -mcpu=native -flto=16 -fno-strict-aliasing  
-fgnu89-inline -L/home/mjm/jemalloc/lib -ljemalloc
```

505.mcf_r: basepeak = yes

525.x264_r: basepeak = yes

```
557.xz_r: -mabi=lp64 -std=c99 -fprofile-generate -fprofile-use -g  
-Ofast -mcpu=native -flto=16 -L/home/mjm/jemalloc/lib  
-ljemalloc
```

C++ benchmarks:

```
-mabi=lp64 -std=c++03 -fprofile-generate -fprofile-use -g -Ofast  
-mcpu=native -flto=16 -L/home/mjm/jemalloc/lib -ljemalloc
```

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks:

505.mcf_r: -fcommon

525.x264_r: -fcommon

C++ benchmarks:

523.xalancbmk_r: -Wno-error=template-body



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017_int_base = 35.1
SPECrate®2017_int_energy_base = 271
SPECrate®2017_int_peak = 36.2
SPECrate®2017_int_energy_peak = 280

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Feb-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

The flags file that was used to format this result can be browsed at
<http://www.spec.org/cpu2017/flags/gcc.2026-04-28.00.html>

You can also download the XML flags source by saving the following link:
<http://www.spec.org/cpu2017/flags/gcc.2026-04-28.00.xml>

PTDaemon, SPEC CPU, and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-02-27 01:53:16-0500.
Report generated on 2026-04-28 13:16:50 by CPU2017 PDF formatter v6716.
Originally published on 2026-04-28.