



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017\_int\_base = 2.78  
SPECrate®2017\_int\_energy\_base = 35.5  
SPECrate®2017\_int\_peak = 2.88  
SPECrate®2017\_int\_energy\_peak = 36.8

CPU2017 License: 6412


Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Feb-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

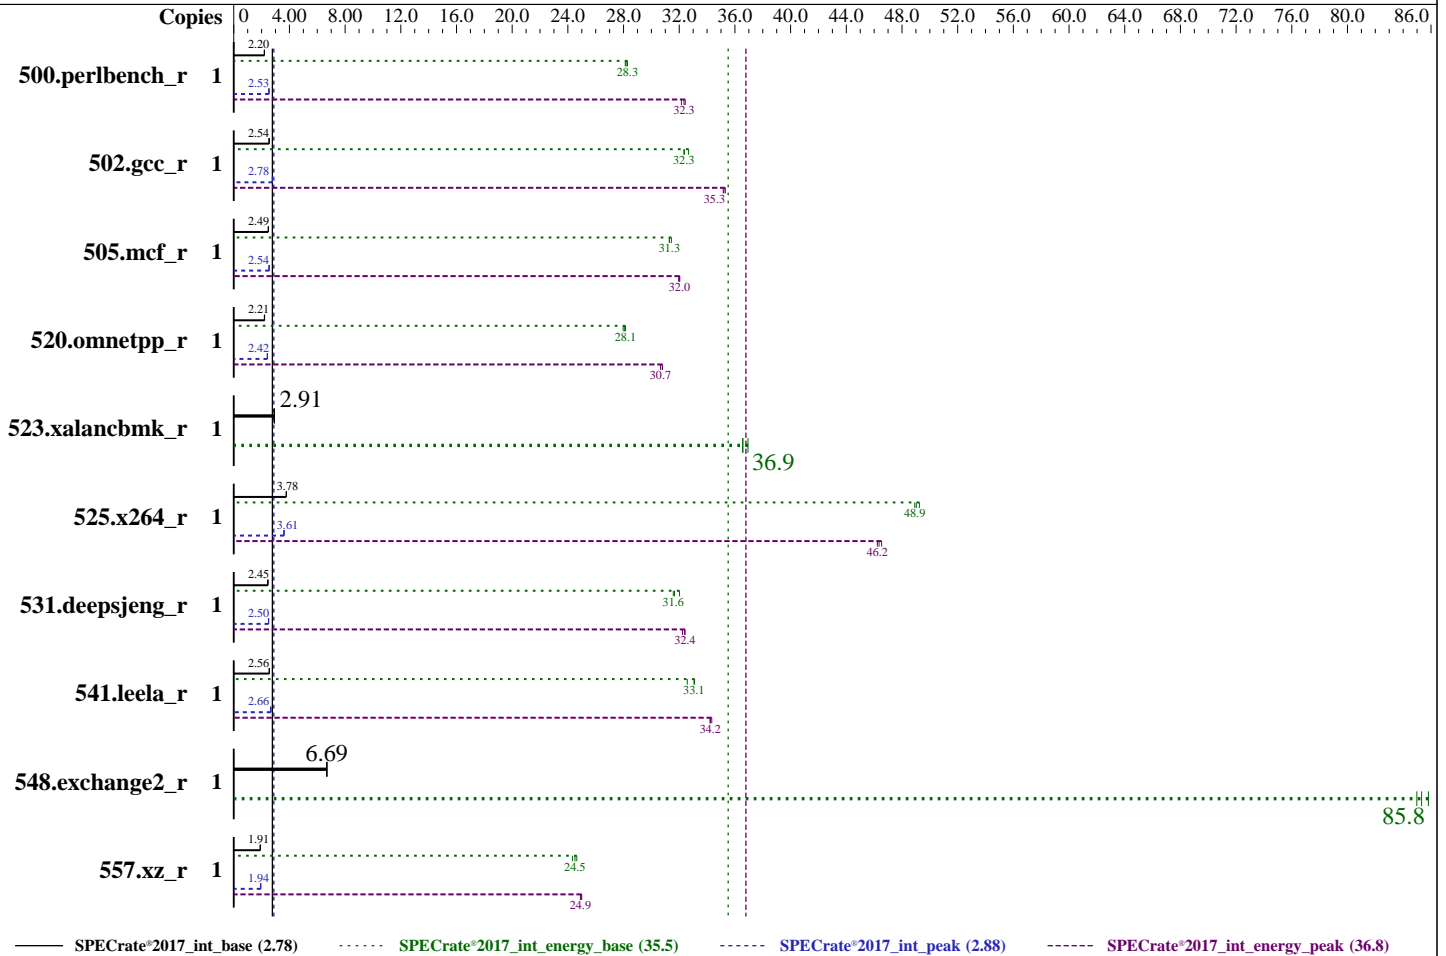

## Hardware

CPU Name: Ampere eMAG 8180  
Max MHz: 3300  
Nominal: 3000  
Enabled: 32 cores, 1 chip  
Orderable: 1 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 4 MB I+D on chip per chip (256 KiB shared / 2 cores)  
L3: 32 MB I+D on chip per chip  
Other: None  
Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2666V-R)  
Storage: 1 x 480 GB SATA SSD  
Other: CPU Cooling: Air

## Software

OS: Ubuntu 24.04.1 LTS kernel 6.8.0 (64KB pages)  
Compiler: C/C++/Fortran: Version 15.2.0 of GCC  
Parallel: No  
Firmware: Version 1.12 released Nov-2019  
File System: ext4  
System State: Run level 5 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc v5.3+, commit hash 1972241  
Power Management: OS CPU governor set to "performance"



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
**(3.00 GHz Ampere eMAG 8180)**

SPECrate®2017\_int\_base = 2.78  
SPECrate®2017\_int\_energy\_base = 35.5  
SPECrate®2017\_int\_peak = 2.88  
SPECrate®2017\_int\_energy\_peak = 36.8

**CPU2017 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## Power

Max. Power (W): 93.04  
Idle Power (W): 76.14  
Min. Temperature (C): 20.81  
Elevation (m): 60  
Line Standard: 120 V / 60 Hz / 1 phase / 2 wire  
Provisioning: Line powered

### Power Settings

Management FW: Version 11.05.111 of Falcon BMC  
Memory Mode: Normal

### Power-Relevant Hardware

Power Supply: 1 x 550 W (non-redundant)  
Details: Lenovo 03LD785 550 Watt High Efficiency Platinum AC Power Supply  
Backplane: N/A  
Other Storage: N/A  
Storage Model #: 1 x Lenovo 01PE965 (480GB SATA SSD) connected to on-board HBA  
NICs Installed: 1 x Lenovo 01PE857 @ 10 GbE (2 ports ethernet)  
NICs Enabled (FW/OS): 2 / 1  
NICs Connected/Speed: 1 @ 1 Gbps  
Other HW Model #: --

### Power Analyzer

Power Analyzer: cpu-reference-ptd:8000  
Hardware Vendor: Yokogawa  
Model: YokogawaWT310E  
Serial Number: T11733385  
Input Connection: Serial over USB  
Metrology Institute: NIST  
Calibration By: Yokogawa USA  
Calibration Label: T126622  
Calibration Date: 18-Aug-2025  
PTDaemon® Version: 1.11.3 (0c074d7d; 2025-10-15)  
Setup Description: Directly connected  
Current Ranges Used: 5A  
Voltage Range Used: 150V

### Temperature Meter

Temperature Meter: cpu-reference-ptd:9000  
Hardware Vendor: PCSensor  
Model: PCSensor USB9097+DS18B20  
Serial Number: --  
Input Connection: USB  
PTDaemon Version: 1.11.3 (0c074d7d; 2025-10-15)  
Setup Description: In front of SUT front panel primary air inlet

## Base Results Table

| Benchmark       | Copies | Seconds    | Ratio       | Energy (kJ) | Energy Ratio | Average Power | Maximum Power | Seconds    | Ratio       | Energy (kJ) | Energy Ratio | Average Power | Maximum Power | Seconds    | Ratio       | Energy (kJ) | Energy Ratio | Average Power | Maximum Power |
|-----------------|--------|------------|-------------|-------------|--------------|---------------|---------------|------------|-------------|-------------|--------------|---------------|---------------|------------|-------------|-------------|--------------|---------------|---------------|
| 500.perlbench_r | 1      | <b>723</b> | <b>2.20</b> | <b>61.1</b> | <b>28.3</b>  | <b>84.5</b>   | <b>86.9</b>   | 724        | 2.20        | 61.3        | 28.2         | 84.6          | 87.1          | 723        | 2.20        | 61.4        | 28.1         | 85.0          | 87.5          |
| 502.gcc_r       | 1      | <b>557</b> | <b>2.54</b> | <b>47.6</b> | <b>32.3</b>  | <b>85.3</b>   | <b>88.9</b>   | 557        | 2.54        | 47.5        | 32.4         | 85.2          | 88.3          | 556        | 2.55        | 47.1        | 32.7         | 84.6          | 89.9          |
| 505.mcf_r       | 1      | 651        | 2.48        | 56.2        | 31.4         | 86.5          | 90.1          | 650        | 2.49        | 56.5        | 31.3         | 87.0          | 90.9          | <b>650</b> | <b>2.49</b> | <b>56.5</b> | <b>31.3</b>  | <b>86.9</b>   | <b>90.4</b>   |
| 520.omnetpp_r   | 1      | 597        | 2.20        | 50.8        | 28.0         | 85.1          | 88.2          | <b>594</b> | <b>2.21</b> | <b>50.5</b> | <b>28.1</b>  | <b>85.0</b>   | <b>88.2</b>   | 591        | 2.22        | 50.6        | 28.1         | 85.6          | 88.0          |
| 523.xalancbmk_r | 1      | 363        | 2.91        | 31.3        | 36.6         | 86.2          | 89.8          | 362        | 2.91        | 31.3        | 36.6         | 86.3          | 91.1          | <b>363</b> | <b>2.91</b> | <b>31.0</b> | <b>36.9</b>  | <b>85.4</b>   | <b>89.9</b>   |
| 525.x264_r      | 1      | 464        | 3.77        | 38.7        | 49.0         | 83.4          | 87.6          | 463        | 3.78        | 38.5        | 49.3         | 83.2          | 87.2          | <b>464</b> | <b>3.78</b> | <b>38.8</b> | <b>48.9</b>  | <b>83.7</b>   | <b>87.2</b>   |
| 531.deepsjeng_r | 1      | 468        | 2.45        | 38.9        | 32.0         | 83.1          | 85.7          | <b>468</b> | <b>2.45</b> | <b>39.5</b> | <b>31.6</b>  | <b>84.3</b>   | <b>87.7</b>   | 468        | 2.45        | 39.3        | 31.7         | 84.1          | 86.8          |
| 541.leela_r     | 1      | 652        | 2.54        | 55.0        | 32.6         | 84.4          | 87.4          | <b>646</b> | <b>2.56</b> | <b>54.2</b> | <b>33.1</b>  | <b>83.9</b>   | <b>86.5</b>   | 646        | 2.56        | 54.1        | 33.1         | 83.8          | 87.3          |
| 548.exchange2_r | 1      | <b>392</b> | <b>6.69</b> | <b>33.1</b> | <b>85.8</b>  | <b>84.5</b>   | <b>88.3</b>   | 392        | 6.69        | 33.3        | 85.3         | 85.0          | 86.7          | 392        | 6.69        | 33.4        | 85.0         | 85.3          | 88.6          |
| 557.xz_r        | 1      | 569        | 1.90        | 48.2        | 24.3         | 84.7          | 86.6          | 565        | 1.91        | 47.6        | 24.6         | 84.3          | 86.3          | <b>566</b> | <b>1.91</b> | <b>47.9</b> | <b>24.5</b>  | <b>84.7</b>   | <b>87.5</b>   |

SPECrate®2017\_int\_base = 2.78

SPECrate®2017\_int\_energy\_base = 35.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
**(3.00 GHz Ampere eMAG 8180)**

SPECrate®2017\_int\_base = 2.78  
SPECrate®2017\_int\_energy\_base = 35.5  
SPECrate®2017\_int\_peak = 2.88  
SPECrate®2017\_int\_energy\_peak = 36.8

**CPU2017 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## Peak Results Table

| Benchmark       | Copies | Seconds    | Ratio       | Energy (kJ) | Energy Ratio | Average Power | Maximum Power | Seconds    | Ratio       | Energy (kJ) | Energy Ratio | Average Power | Maximum Power | Seconds    | Ratio       | Energy (kJ) | Energy Ratio | Average Power | Maximum Power |
|-----------------|--------|------------|-------------|-------------|--------------|---------------|---------------|------------|-------------|-------------|--------------|---------------|---------------|------------|-------------|-------------|--------------|---------------|---------------|
| 500.perlbench_r | 1      | <b>630</b> | <b>2.53</b> | <b>53.4</b> | <b>32.3</b>  | <b>84.7</b>   | <b>87.7</b>   | 631        | 2.52        | 53.3        | 32.4         | 84.4          | 86.6          | 628        | 2.54        | 53.7        | 32.2         | 85.5          | 87.2          |
| 502.gcc_r       | 1      | 510        | 2.78        | 43.7        | 35.2         | 85.6          | 89.1          | <b>510</b> | <b>2.78</b> | <b>43.5</b> | <b>35.3</b>  | <b>85.5</b>   | <b>88.5</b>   | 509        | 2.78        | 43.7        | 35.2         | 85.9          | 88.9          |
| 505.mcf_r       | 1      | <b>636</b> | <b>2.54</b> | <b>55.2</b> | <b>32.0</b>  | <b>86.8</b>   | <b>90.3</b>   | 635        | 2.54        | 55.2        | 32.0         | 86.9          | 90.5          | 637        | 2.54        | 55.3        | 32.0         | 86.9          | 91.0          |
| 520.omnetpp_r   | 1      | 542        | 2.42        | 46.1        | 30.8         | 85.1          | 88.1          | 545        | 2.41        | 46.2        | 30.8         | 84.7          | 87.8          | <b>542</b> | <b>2.42</b> | <b>46.3</b> | <b>30.7</b>  | <b>85.5</b>   | <b>87.5</b>   |
| 523.xalancbmk_r | 1      | 363        | 2.91        | 31.3        | 36.6         | 86.2          | 89.8          | 362        | 2.91        | 31.3        | 36.6         | 86.3          | 91.1          | <b>363</b> | <b>2.91</b> | <b>31.0</b> | <b>36.9</b>  | <b>85.4</b>   | <b>89.9</b>   |
| 525.x264_r      | 1      | <b>485</b> | <b>3.61</b> | <b>41.1</b> | <b>46.2</b>  | <b>84.6</b>   | <b>86.3</b>   | 485        | 3.61        | 41.0        | 46.4         | 84.4          | 87.7          | 485        | 3.61        | 40.8        | 46.5         | 84.1          | 88.1          |
| 531.deepsjeng_r | 1      | <b>458</b> | <b>2.50</b> | <b>38.4</b> | <b>32.4</b>  | <b>83.9</b>   | <b>85.7</b>   | 458        | 2.50        | 38.6        | 32.2         | 84.4          | 86.1          | 458        | 2.50        | 38.5        | 32.4         | 84.0          | 86.7          |
| 541.leela_r     | 1      | 622        | 2.66        | 52.2        | 34.3         | 83.9          | 85.5          | <b>622</b> | <b>2.66</b> | <b>52.3</b> | <b>34.2</b>  | <b>84.1</b>   | <b>88.2</b>   | 622        | 2.66        | 52.4        | 34.2         | 84.2          | 91.8          |
| 548.exchange2_r | 1      | <b>392</b> | <b>6.69</b> | <b>33.1</b> | <b>85.8</b>  | <b>84.5</b>   | <b>88.3</b>   | 392        | 6.69        | 33.3        | 85.3         | 85.0          | 86.7          | 392        | 6.69        | 33.4        | 85.0         | 85.3          | 88.6          |
| 557.xz_r        | 1      | 558        | 1.94        | 47.0        | 25.0         | 84.2          | 86.4          | 558        | 1.94        | 47.0        | 25.0         | 84.3          | 87.2          | <b>558</b> | <b>1.94</b> | <b>47.1</b> | <b>24.9</b>  | <b>84.5</b>   | <b>93.0</b>   |

SPECrate®2017\_int\_peak = **2.88**

SPECrate®2017\_int\_energy\_peak = **36.8**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/usr/lib64:/usr/lib:/lib64:/home/mjm/jemalloc/lib"

## General Notes

jemalloc is a general purpose malloc(3) implementation that emphasizes fragmentation avoidance and scalable concurrency support. sources available from <https://github.com/facebook/jemalloc/tree/1972241> and built via ". /configure --with-lg-quantum=3" which used system gcc-14 -O3

This benchmark result is intended to provide perspective on past power and/or performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

## Platform Notes

Sysinfo program /home/mjm/cpu2017/bin/sysinfo

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
**(3.00 GHz Ampere eMAG 8180)**

SPECrate®2017\_int\_base = 2.78  
SPECrate®2017\_int\_energy\_base = 35.5  
SPECrate®2017\_int\_peak = 2.88  
SPECrate®2017\_int\_energy\_peak = 36.8

**CPU2017 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## Platform Notes (Continued)

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on emag Thu Feb 26 20:23:10 2026

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.8)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. sysctl
15. /sys/kernel/mm/transparent\_hugepage
16. /sys/kernel/mm/transparent\_hugepage/khugepaged
17. OS release
18. Disk information
19. /sys/devices/virtual/dmi/id
20. dmidecode
21. BIOS

1. uname -a  
Linux emag 6.8.0 #1 SMP PREEMPT\_DYNAMIC Fri Feb 28 00:25:30 UTC 2025 aarch64 aarch64 aarch64 GNU/Linux

2. w  
20:23:10 up 69 days, 20:48, 4 users, load average: 0.08, 1.03, 3.40

| USER | TTY | FROM          | LOGIN@  | IDLE   | JCPU  | PCPU  | WHAT             |
|------|-----|---------------|---------|--------|-------|-------|------------------|
| mjm  |     | 10.13.114.186 | 28Jan26 | 14:13m | 0.00s | 0.02s | sshd: mjm [priv] |
| mjm  |     | 10.41.107.182 | 20:04   | 14:13m | 0.00s | 0.02s | sshd: mjm [priv] |
| mjm  |     | 10.41.107.182 | 20:05   | 14:13m | 0.00s | 0.02s | sshd: mjm [priv] |

3. Username  
From environment variable \$USER: mjm

4. ulimit -a

|                       |           |
|-----------------------|-----------|
| time(seconds)         | unlimited |
| file(blocks)          | unlimited |
| data(kbytes)          | unlimited |
| stack(kbytes)         | unlimited |
| coredump(blocks)      | 0         |
| memory(kbytes)        | unlimited |
| locked memory(kbytes) | 16691648  |
| process               | 128681    |

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
**(3.00 GHz Ampere eMAG 8180)**

SPECrate®2017\_int\_base = 2.78  
SPECrate®2017\_int\_energy\_base = 35.5  
SPECrate®2017\_int\_peak = 2.88  
SPECrate®2017\_int\_energy\_peak = 36.8

**CPU2017 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## Platform Notes (Continued)

```
nofiles          1024
vmemory(kbytes)  unlimited
locks            unlimited
rtprio          0
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --system --deserialize=66
SCREEN
-bin/tcsh
runcpu --flagsurl=$SPEC/gcc.2024-08-14.xml --reportable -c emag-Ofast-gcc15 --tune=base,peak -n 3 -C 1
  intrate
runcpu --flagsurl $SPEC/gcc.2024-08-14.xml --reportable --configfile emag-Ofast-gcc15 --tune base,peak
  --iterations 3 --copies 1 --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv
  --logfile $SPEC/tmp/CPU2017.091/temlogs/preenv.intrate.091.0.log --lognum 091.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo -f
$SPEC = /home/mjm/cpu2017
```

```
-----
6. /proc/cpuinfo
CPU implementer : 0x50
CPU architecture: 8
CPU variant    : 0x3
CPU part      : 0x000
CPU revision   : 2
Features      : fp asimd evtstrm aes pmull sha1 sha2 crc32 cpuid
```

### 7. lscpu

```
From lscpu from util-linux 2.39.3:
Architecture:          aarch64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:   0-31
Vendor ID:             APM
Model name:            -
Model:                 2
Thread(s) per core:    1
Core(s) per socket:    32
Socket(s):             1
Stepping:              0x3
Frequency boost:       disabled
CPU(s) scaling MHz:    100%
CPU max MHz:           2911.7639
CPU min MHz:           363.9700
BogoMIPS:              80.00
Flags:                 fp asimd evtstrm aes pmull sha1 sha2 crc32 cpuid
L1d cache:            1 MiB (32 instances)
L1i cache:            1 MiB (32 instances)
L2 cache:              4 MiB (16 instances)
NUMA node(s):         1
NUMA node0 CPU(s):    0-31
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:              Not affected
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
**(3.00 GHz Ampere eMAG 8180)**

SPECrate®2017\_int\_base = 2.78  
SPECrate®2017\_int\_energy\_base = 35.5  
SPECrate®2017\_int\_peak = 2.88  
SPECrate®2017\_int\_energy\_peak = 36.8

**CPU2017 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## Platform Notes (Continued)

Vulnerability Mds: Not affected  
Vulnerability Meltdown: Mitigation; PTI  
Vulnerability Mmio stale data: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec rstack overflow: Not affected  
Vulnerability Spec store bypass: Vulnerable  
Vulnerability Spectre v1: Mitigation; \_\_user pointer sanitization  
Vulnerability Spectre v2: Vulnerable  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|------|----------|----------------|
| L1d  | 32K      | 1M       | 8    | Data        | 1     |      |          |                |
| L1i  | 32K      | 1M       | 8    | Instruction | 1     |      |          |                |
| L2   | 256K     | 4M       | 32   | Unified     | 2     |      |          |                |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)  
node 0 cpus: 0-31  
node 0 size: 130403 MB  
node 0 free: 117717 MB  
node distances:  
node 0  
0: 10

9. /proc/meminfo

MemTotal: 133533376 kB

10. who -r

run-level 5 Dec 18 23:35

11. Systemd service manager version: systemd 255 (255.4-lubuntu8.8)

Default Target Status  
graphical running

12. Services, from systemctl list-unit-files

| STATE           | UNIT FILES  |
|-----------------|---|
| enabled         | ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate power-profiles-daemon rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth |
| enabled-runtime | netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs  |
| disabled        | console-getty debug-shell ipmievd iscsid nftables rsync ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-PCRlock-file-system systemd-PCRlock-firmware-code systemd-PCRlock-firmware-config systemd-PCRlock-machine-id systemd-PCRlock-make-policy systemd-PCRlock-secureboot-authority systemd-PCRlock-secureboot-policy systemd-sysext systemd-time-wait-sync  |

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017\_int\_base = 2.78  
SPECrate®2017\_int\_energy\_base = 35.5  
SPECrate®2017\_int\_peak = 2.88  
SPECrate®2017\_int\_energy\_peak = 36.8

**CPU2017 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## Platform Notes (Continued)

generated openipmi perlbal  
indirect serial-getty@ systemd-sysupdate systemd-sysupdate-reboot uidd  
masked cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-6.8.0  
root=UUID=16268541-06d0-4374-97ca-2d512d4db26f  
ro  
cma=1024M  
iommu.passthrough=1

-----  
14. sysctl  
kernel.numa\_balancing 0  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 20  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 60  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 0

-----  
15. /sys/kernel/mm/transparent\_hugepage  
defrag always defer defer+madvice [madvice] never  
enabled always [madvice] never  
hpage\_pmd\_size 536870912  
shmem\_enabled always within\_size advise [never] deny force

-----  
16. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 8191  
max\_ptes\_shared 4096  
max\_ptes\_swap 1024  
pages\_to\_scan 65536  
scan\_sleep\_millisecs 10000

-----  
17. OS release  
From /etc/\*-release /etc/\*-version  
os-release Ubuntu 24.04.1 LTS  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017\_int\_base = 2.78  
SPECrate®2017\_int\_energy\_base = 35.5  
SPECrate®2017\_int\_peak = 2.88  
SPECrate®2017\_int\_energy\_peak = 36.8

**CPU2017 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## Platform Notes (Continued)

### 18. Disk information

SPEC is set to: /home/mjm/cpu2017

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|------------|------|------|------|-------|------|------------|
| /dev/sda2  | ext4 | 439G | 279G | 138G  | 68%  | /          |

### 19. /sys/devices/virtual/dmi/id

```
Vendor:      Lenovo
Product:     HR330A          7X33CTO1WW
Product Family: Lenovo ThinkSystem HR330A/HR350A
```

### 20. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

8x Samsung M393A2K43CB2-CTD 16 GB 2 rank 2667

### 21. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      LENOVO
BIOS Version:     HVE104N-1.12
BIOS Date:        11/29/2019
BIOS Revision:    1.12
Firmware Revision: 1.7
```

## Power Settings Notes

OS CPU governor was set using the command:

```
echo performance | tee /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor
```

## Compiler Version Notes

```
=====  
C      | 500.perlbench_r(base, peak) 502.gcc_r(base, peak) 505.mcf_r(base, peak) 525.x264_r(base, peak)  
      | 557.xz_r(base, peak)  
=====
```

gcc (GCC) 15.2.0

Copyright (C) 2025 Free Software Foundation, Inc.

This is free software; see the source for copying conditions. There is NO warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

```
=====  
C++    | 520.omnetpp_r(base, peak) 523.xalancbnk_r(base, peak) 531.deepsjeng_r(base, peak)  
      | 541.leela_r(base, peak)  
=====
```

g++ (GCC) 15.2.0

Copyright (C) 2025 Free Software Foundation, Inc.

This is free software; see the source for copying conditions. There is NO warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017\_int\_base = 2.78  
SPECrate®2017\_int\_energy\_base = 35.5  
SPECrate®2017\_int\_peak = 2.88  
SPECrate®2017\_int\_energy\_peak = 36.8

**CPU2017 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## Compiler Version Notes (Continued)

-----  
=====

Fortran | 548.exchange2\_r(base, peak)

-----

GNU Fortran (GCC) 15.2.0  
Copyright (C) 2025 Free Software Foundation, Inc.  
This is free software; see the source for copying conditions. There is NO  
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

-----

## Base Compiler Invocation

C benchmarks:  
gcc

C++ benchmarks:  
g++

Fortran benchmarks:  
gfortran

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_AARCH64 -DSPEC\_LP64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:  
-mabi=lp64 -std=c99 -g -Ofast -mcpu=native -flto=16  
-fno-strict-aliasing -fno-unsafe-math-optimizations  
-fno-finite-math-only -fgnu89-inline -L/home/mjm/jemalloc/lib

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017\_int\_base = 2.78  
SPECrate®2017\_int\_energy\_base = 35.5  
SPECrate®2017\_int\_peak = 2.88  
SPECrate®2017\_int\_energy\_peak = 36.8

**CPU2017 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## Base Optimization Flags (Continued)

C benchmarks (continued):  
-ljemalloc

C++ benchmarks:  
-mabi=lp64 -std=c++03 -g -Ofast -mcpu=native -flto=16  
-L/home/mjm/jemalloc/lib -ljemalloc

Fortran benchmarks:  
-mabi=lp64 -g -Ofast -mcpu=native -flto=16 -L/home/mjm/jemalloc/lib  
-ljemalloc

## Base Other Flags

C benchmarks:  
-fcommon

C++ benchmarks:  
-Wno-error=template-body

## Peak Compiler Invocation

C benchmarks:  
gcc

C++ benchmarks:  
g++

Fortran benchmarks:  
gfortran

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017\_int\_base = 2.78  
SPECrate®2017\_int\_energy\_base = 35.5  
SPECrate®2017\_int\_peak = 2.88  
SPECrate®2017\_int\_energy\_peak = 36.8

**CPU2017 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -mabi=lp64 -std=c99 -fprofile-generate -fprofile-use -g
-Ofast -mcpu=native -flto=16 -fno-strict-aliasing
-fno-unsafe-math-optimizations -fno-finite-math-only
-L/home/mjm/jemalloc/lib -ljemalloc
```

```
502.gcc_r: -mabi=lp64 -std=c99 -fprofile-generate -fprofile-use -g
-Ofast -mcpu=native -flto=16 -fno-strict-aliasing
-fgnu89-inline -L/home/mjm/jemalloc/lib -ljemalloc
```

```
505.mcf_r: -mabi=lp64 -std=c99 -fprofile-generate -fprofile-use -g
-Ofast -mcpu=native -flto=16 -fno-strict-aliasing
-L/home/mjm/jemalloc/lib -ljemalloc
```

```
525.x264_r: -mabi=lp64 -std=c99 -fprofile-generate -fprofile-use -g
-Ofast -mcpu=native -flto=16 -L/home/mjm/jemalloc/lib
-ljemalloc
```

557.xz\_r: Same as 525.x264\_r

C++ benchmarks:

```
520.omnetpp_r: -mabi=lp64 -std=c++03 -fprofile-generate -fprofile-use
-g -Ofast -mcpu=native -flto=16 -L/home/mjm/jemalloc/lib
-ljemalloc
```

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

## Peak Other Flags

C benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017\_int\_base = 2.78  
SPECrate®2017\_int\_energy\_base = 35.5  
SPECrate®2017\_int\_peak = 2.88  
SPECrate®2017\_int\_energy\_peak = 36.8

**CPU2017 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## Peak Other Flags (Continued)

525.x264\_r: -fcommon

C++ benchmarks:

523.xalancbmk\_r: -Wno-error=template-body

The flags file that was used to format this result can be browsed at  
<http://www.spec.org/cpu2017/flags/gcc.2026-04-28.00.html>

You can also download the XML flags source by saving the following link:  
<http://www.spec.org/cpu2017/flags/gcc.2026-04-28.00.xml>

PTDaemon, SPEC CPU, and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2026-02-26 15:23:09-0500.  
Report generated on 2026-04-28 13:16:50 by CPU2017 PDF formatter v6716.  
Originally published on 2026-04-28.