SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL , Intel Xeon 6990E+)

SPECrate®2017_fp_base = 2600

SPECrate®2017_fp_peak = 2650

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: May-2026

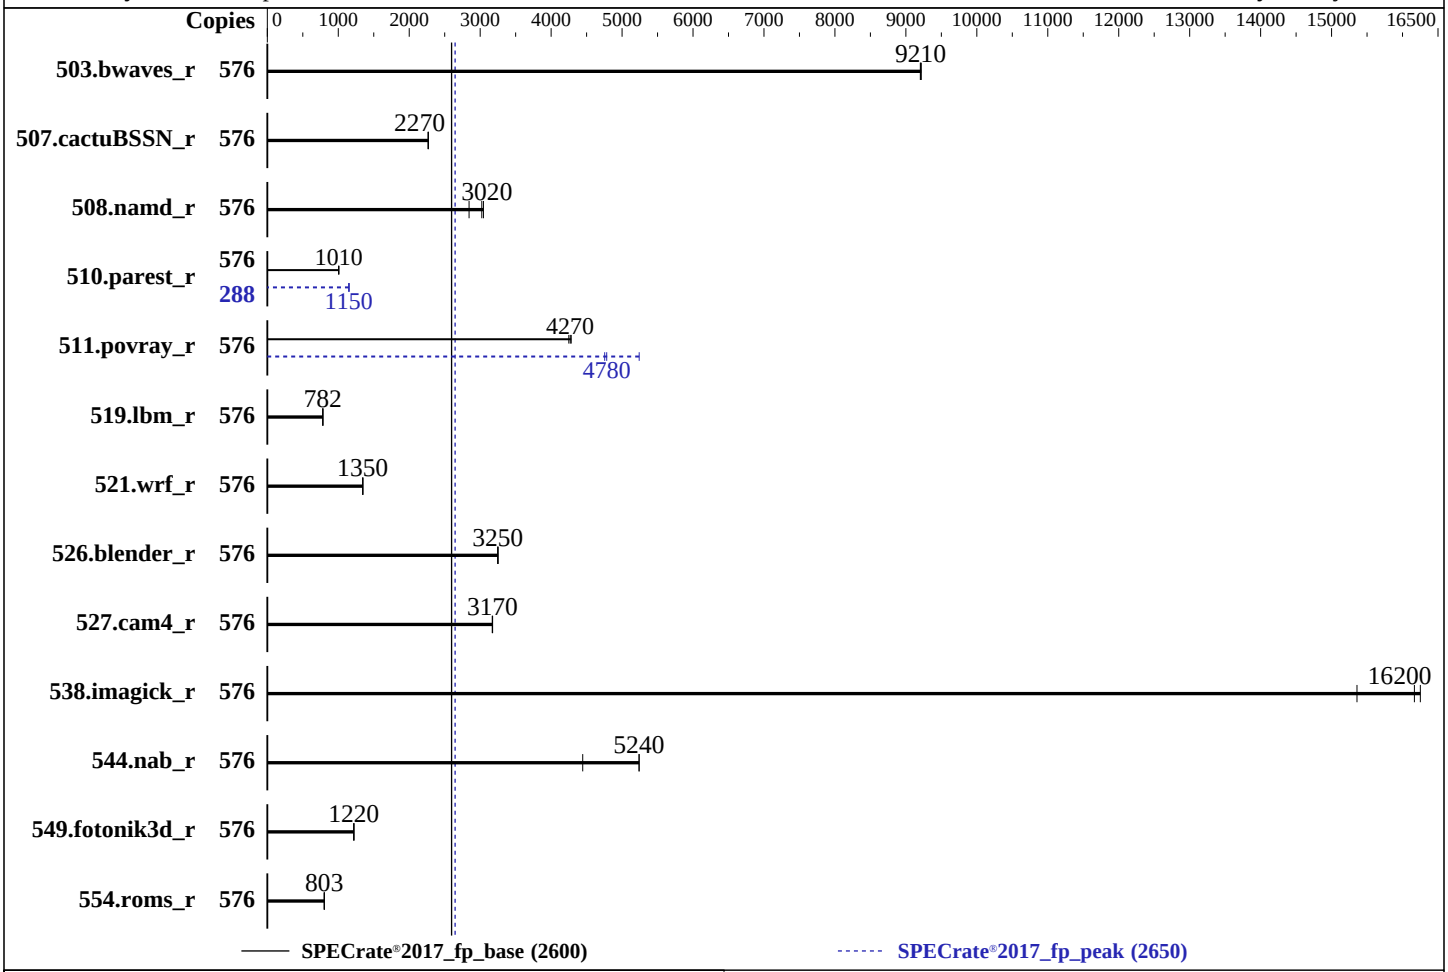

Hardware

CPU Name:	Intel Xeon 6990E+
Max MHz:	3200
Nominal:	2200
Enabled:	576 cores, 2 chips
Orderable:	1, 2 chips
Cache L1:	64 KB I + 32 KB D on chip per core
L2:	4 MB I+D on chip per core
L3:	576 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-8000B-R)
Storage:	1 x 1.92TB NVMe SSD
Other:	CPU Cooling: DLC

Software

OS:	SUSE Linux Enterprise Server 15 SP7 6.4.0-150700.51-default
Compiler:	C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2026.0 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 2.0 released May-2026
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	576	627	9220	628	9200	**627**	**9210**	576	627	9220	628	9200	**627**	**9210**
507.cactuBSSN_r	576	**321**	**2270**	321	2270	322	2270	576	**321**	**2270**	321	2270	322	2270
508.namd_r	576	**181**	**3020**	192	2840	180	3050	576	**181**	**3020**	192	2840	180	3050
510.parest_r	576	**1496**	**1010**	1496	1010	1499	1010	288	655	1150	655	1150	**655**	**1150**
511.povray_r	576	317	4250	**315**	**4270**	314	4280	576	**281**	**4780**	257	5240	283	4750
519.lbm_r	576	776	783	776	782	**776**	**782**	576	776	783	776	782	**776**	**782**
521.wrf_r	576	959	1350	**959**	**1350**	959	1350	576	959	1350	**959**	**1350**	959	1350
526.blender_r	576	**270**	**3250**	270	3250	270	3250	576	**270**	**3250**	270	3250	270	3250
527.cam4_r	576	318	3170	**317**	**3170**	317	3180	576	318	3170	**317**	**3170**	317	3180
538.imagick_r	576	**88.6**	**16200**	93.3	15400	88.1	16300	576	**88.6**	**16200**	93.3	15400	88.1	16300
544.nab_r	576	185	5240	**185**	**5240**	218	4450	576	185	5240	**185**	**5240**	218	4450
549.fotonik3d_r	576	1840	1220	**1841**	**1220**	1841	1220	576	1840	1220	**1841**	**1220**	1841	1220
554.roms_r	576	1141	802	**1140**	**803**	1139	803	576	1141	802	**1140**	**803**	1139	803

SPECrate®2017_fp_base = 2600

SPECrate®2017_fp_peak = 2650

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
 Power Performance Tuning = BIOS Controls EPB
 ENERGY_PERF_BIAS_CFG mode = Extreme Performance

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on 182-145 Fri May 15 00:23:29 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux 182-145 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64
   x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    00:23:30 up  5:55,  1 user,  load average: 338.50, 514.22, 545.71
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   root     tty1     -                18:29    5:37m  1.30s  0.03s -bash

 ------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 6189164
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 6189164
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 login -- root
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=576 -c
   ic2026.0-lin-clearwaterforest-rate-20260429.cfg --define smt-on --define peakfpcopies=288 --define
   physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak -o all
   fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=576 --configfile
   ic2026.0-lin-clearwaterforest-rate-20260429.cfg --define smt-on --define peakfpcopies=288 --define
   physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
   --output_format all --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv
   --note-preenv --logfile $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0
   --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6990E+
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 221
    stepping        : 1
    microcode       : 0x1000120
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 288
    siblings        : 288
    2 physical ids (chips)
    576 processors (hardware threads)
    physical id 0: core ids 0-95,128-223,256-351
    physical id 1: core ids 0-95,128-223,256-351
    physical id 0: apicids
    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
    ,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
    32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18
```

(Continued on next page)

Platform Notes (Continued)

```
    4,186,188,190,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300
    ,302,304,306,308,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,
    354,356,358,360,362,364,366,368,370,372,374,376,378,380,382,384,386,388,390,392,394,396,398,400,402,404,4
    06,408,410,412,414,416,418,420,422,424,426,428,430,432,434,436,438,440,442,444,446,512,514,516,518,520,52
    2,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,564,566,568,570,572,574
    ,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,616,618,620,622,624,626,
    628,630,632,634,636,638,640,642,644,646,648,650,652,654,656,658,660,662,664,666,668,670,672,674,676,678,6
    80,682,684,686,688,690,692,694,696,698,700,702
    physical id 1: apicids
    1024,1026,1028,1030,1032,1034,1036,1038,1040,1042,1044,1046,1048,1050,1052,1054,1056,1058,1060,1062,1064,
    1066,1068,1070,1072,1074,1076,1078,1080,1082,1084,1086,1088,1090,1092,1094,1096,1098,1100,1102,1104,1106,
    1108,1110,1112,1114,1116,1118,1120,1122,1124,1126,1128,1130,1132,1134,1136,1138,1140,1142,1144,1146,1148,
    1150,1152,1154,1156,1158,1160,1162,1164,1166,1168,1170,1172,1174,1176,1178,1180,1182,1184,1186,1188,1190,
    1192,1194,1196,1198,1200,1202,1204,1206,1208,1210,1212,1214,1280,1282,1284,1286,1288,1290,1292,1294,1296,
    1298,1300,1302,1304,1306,1308,1310,1312,1314,1316,1318,1320,1322,1324,1326,1328,1330,1332,1334,1336,1338,
    1340,1342,1344,1346,1348,1350,1352,1354,1356,1358,1360,1362,1364,1366,1368,1370,1372,1374,1376,1378,1380,
    1382,1384,1386,1388,1390,1392,1394,1396,1398,1400,1402,1404,1406,1408,1410,1412,1414,1416,1418,1420,1422,
    1424,1426,1428,1430,1432,1434,1436,1438,1440,1442,1444,1446,1448,1450,1452,1454,1456,1458,1460,1462,1464,
    1466,1468,1470,1536,1538,1540,1542,1544,1546,1548,1550,1552,1554,1556,1558,1560,1562,1564,1566,1568,1570,
    1572,1574,1576,1578,1580,1582,1584,1586,1588,1590,1592,1594,1596,1598,1600,1602,1604,1606,1608,1610,1612,
    1614,1616,1618,1620,1622,1624,1626,1628,1630,1632,1634,1636,1638,1640,1642,1644,1646,1648,1650,1652,1654,
    1656,1658,1660,1662,1664,1666,1668,1670,1672,1674,1676,1678,1680,1682,1684,1686,1688,1690,1692,1694,1696,
    1698,1700,1702,1704,1706,1708,1710,1712,1714,1716,1718,1720,1722,1724,1726
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.40.4:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 48 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               576
  On-line CPU(s) list:                  0-575
  Vendor ID:                            GenuineIntel
  Model name:                           Intel(R) Xeon(R) 6990E+
  CPU family:                           6
  Model:                                221
  Thread(s) per core:                   1
  Core(s) per socket:                   288
  Socket(s):                            2
  Stepping:                             1
  BogoMIPS:                             4400.00
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon bts rep_good nopl
                                        xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
                                        dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                                        pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                                        xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
                                        cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                                        ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase
                                        tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap
                                        clflushopt clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves
                                        cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                                        user_shstk avx_vnni lam wbnoinvd dtherm ida arat pln pts vnmi umip
                                        pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid bus_lock_detect
                                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize pconfig
```

(Continued on next page)

Platform Notes (Continued)

```
                                     arch_lbr ibt flush_l1d arch_capabilities
  Virtualization:                    VT-x
  L1d cache:                         18 MiB (576 instances)
  L1i cache:                         36 MiB (576 instances)
  L2 cache:                          576 MiB (144 instances)
  L3 cache:                          1.1 GiB (2 instances)
  NUMA node(s):                      6
  NUMA node0 CPU(s):                 0-95
  NUMA node1 CPU(s):                 96-191
  NUMA node2 CPU(s):                 192-287
  NUMA node3 CPU(s):                 288-383
  NUMA node4 CPU(s):                 384-479
  NUMA node5 CPU(s):                 480-575
  Vulnerability Gather data sampling:  Not affected
  Vulnerability Itlb multihit:       Not affected
  Vulnerability L1tf:                Not affected
  Vulnerability Mds:                 Not affected
  Vulnerability Meltdown:            Not affected
  Vulnerability Mmio stale data:     Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:            Not affected
  Vulnerability Spec rstack overflow:  Not affected
  Vulnerability Spec store bypass:   Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:          Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:          Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                     PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:               Not affected
  Vulnerability Tsx async abort:     Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       32K      18M    8 Data            1     64        1             64
     L1i       64K      36M    8 Instruction     1    128        1             64
     L2         4M     576M   16 Unified         2   4096        1             64
     L3       576M     1.1G   16 Unified         3 589824        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 6 nodes (0-5)
  node 0 cpus: 0-95
  node 0 size: 257400 MB
  node 0 free: 215542 MB
  node 1 cpus: 96-191
  node 1 size: 258022 MB
  node 1 free: 215066 MB
  node 2 cpus: 192-287
  node 2 size: 258022 MB
  node 2 free: 221285 MB
  node 3 cpus: 288-383
  node 3 size: 258022 MB
  node 3 free: 221791 MB
  node 4 cpus: 384-479
  node 4 size: 258022 MB
  node 4 free: 221550 MB
  node 5 cpus: 480-575
  node 5 size: 257828 MB
  node 5 free: 221494 MB
  node distances:
  node   0   1   2   3   4   5
```

(Continued on next page)

Platform Notes (Continued)

```
     0:  10  15  17  21  28  26
     1:  15  10  15  23  26  23
     2:  17  15  10  26  23  21
     3:  21  28  26  10  15  17
     4:  23  26  23  15  10  15
     5:  26  23  21  17  15  10

------------------------------------------------------------
9. /proc/meminfo
    MemTotal:       1584455352 kB

------------------------------------------------------------
10. who -r
  run-level 3 May 14 18:45 last=5

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron
                   display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd
                   nvmefc-boot-connections nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd
                   sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         accounts-daemon autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl
                   ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebtables
                   exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged ipmi ipmievd
                   issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb
                   ostree-remount ostree-state-overlay@ rpcbind rpmconfigcheck rsyncd rtkit-daemon samba-bgqd
                   serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd
                   systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext
                   systemd-time-wait-sync systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@
  indirect         systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
  root=UUID=a01dde6d-ca13-4c27-8508-91fa7301d7f7
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 407:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                     60
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP7

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p3 xfs   800G  443G  358G  56% /home

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Supermicro
    Product:        Super Server
    Product Family: Family
    Serial:         0123456789

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    24x Samsung MDRR644QEBC2-5R000 64 GB 2 rank 8000
```

(Continued on next page)

Platform Notes (Continued)

```
 ------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      2.0
   BIOS Date:         05/06/2026
   BIOS Revision:     5.35
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-w -std=c11 -m64 -Wl,-z,muldefs -xclearwaterforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:
```
-w -std=c++14 -m64 -Wl,-z,muldefs -xclearwaterforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:
```
-w -m64 -Wl,-z,muldefs -xclearwaterforest -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:
```
-w -m64 -std=c11 -Wl,-z,muldefs -xclearwaterforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:
```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xclearwaterforest
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:
```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xclearwaterforest
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:
```
icx
```

C++ benchmarks:
```
icpx
```

(Continued on next page)

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xclearwaterforest
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

554.roms_r: `basepeak = yes`

Benchmarks using both Fortran and C:

521.wrf_r: `basepeak = yes`

527.cam4_r: `basepeak = yes`

Benchmarks using both C and C++:

511.povray_r: `-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate`(pass 1) `-fprofile-use=default.profdata`(pass 2) `-xCORE-AVX2 -flto -Ofast -ffast-math -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CWF-revC.html`
`http://www.spec.org/cpu2017/flags/Intel-ic2026-official-linux64.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CWF-revC.xml`
`http://www.spec.org/cpu2017/flags/Intel-ic2026-official-linux64.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-05-15 03:23:29-0400.
Report generated on 2026-06-02 16:16:47 by CPU2017 PS formatter v6716.
Originally published on 2026-06-02.