



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -5126GS-TNRT2
(H14DSG-O-CPU , AMD EPYC 9335)

SPECspeed®2017_fp_base = 414

SPECspeed®2017_fp_peak = 442

CPU2017 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2026

Hardware Availability: Oct-2024

Software Availability: Apr-2026

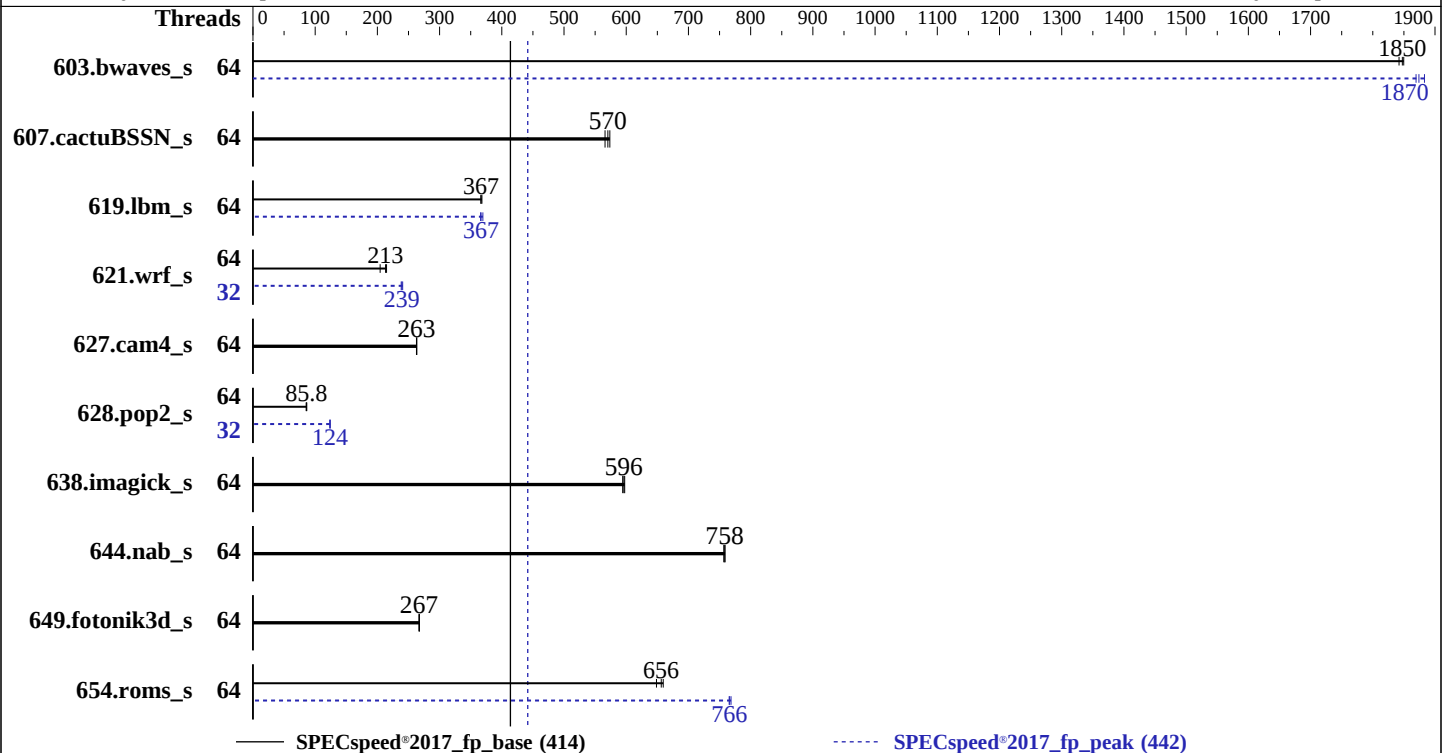

Hardware

CPU Name: AMD EPYC 9335
Max MHz: 4400
Nominal: 3000
Enabled: 64 cores, 2 chips, 2 threads/core
Orderable: 2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 128 MB I+D on chip per chip, 32 MB shared / 8 cores
Other: None
Memory: 2304 GB (24 x 96 GB 2Rx4 PC5-6400B-R)
Storage: 1 x 960 GB NVMe SSD
Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.4 LTS
Kernel 6.8.0-111-generic
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: Version 1.9 released Jan-2026
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -5126GS-TNRT2
(H14DSG-O-CPU , AMD EPYC 9335)

SPECspeed®2017_fp_base = 414

SPECspeed®2017_fp_peak = 442

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2026

Hardware Availability: Oct-2024

Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	<u>31.9</u>	<u>1850</u>	31.9	1850	32.0	1840	64	31.3	1880	31.6	1870	<u>31.5</u>	<u>1870</u>
607.cactuBSSN_s	64	29.5	566	29.1	574	<u>29.2</u>	<u>570</u>	64	29.5	566	29.1	574	<u>29.2</u>	<u>570</u>
619.lbm_s	64	14.2	368	14.3	366	<u>14.3</u>	<u>367</u>	64	14.3	366	<u>14.3</u>	<u>367</u>	14.2	370
621.wrf_s	64	<u>62.1</u>	<u>213</u>	64.7	204	61.6	215	32	55.5	238	<u>55.3</u>	<u>239</u>	55.0	241
627.cam4_s	64	<u>33.7</u>	<u>263</u>	33.7	263	33.6	263	64	<u>33.7</u>	<u>263</u>	33.7	263	33.6	263
628.pop2_s	64	137	86.5	<u>138</u>	<u>85.8</u>	139	85.7	32	95.7	124	<u>95.9</u>	<u>124</u>	96.0	124
638.imagick_s	64	<u>24.2</u>	<u>596</u>	24.1	598	24.3	594	64	<u>24.2</u>	<u>596</u>	24.1	598	24.3	594
644.nab_s	64	23.1	757	23.0	759	<u>23.0</u>	<u>758</u>	64	23.1	757	23.0	759	<u>23.0</u>	<u>758</u>
649.fotonik3d_s	64	34.1	268	34.1	267	<u>34.1</u>	<u>267</u>	64	34.1	268	34.1	267	<u>34.1</u>	<u>267</u>
654.roms_s	64	24.3	649	23.9	659	<u>24.0</u>	<u>656</u>	64	<u>20.5</u>	<u>766</u>	20.6	765	20.5	768

SPECspeed®2017_fp_base = 414

SPECspeed®2017_fp_peak = 442

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -5126GS-TNRT2
(H14DSG-O-CPU, AMD EPYC 9335)

SPECspeed®2017_fp_base = 414

SPECspeed®2017_fp_peak = 442

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Oct-2024
Software Availability: Apr-2026

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-127"
LD_LIBRARY_PATH =
"/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOCCONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "128"
```

Environment variables set by runcpu during the 603.bwaves_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
```

Environment variables set by runcpu during the 619.lbm_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
```

Environment variables set by runcpu during the 621.wrf_s peak run:

```
GOMP_CPU_AFFINITY = "0,64,1,65,2,66,3,67,4,68,5,69,6,70,7,71,8,72,9,73,10,74,11,75,12,76,13,77,14,78,15,79"
```

Environment variables set by runcpu during the 628.pop2_s peak run:

```
GOMP_CPU_AFFINITY = "0-31"
```

Environment variables set by runcpu during the 654.roms_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

```
NUMA Nodes Per Socket = NPS4
Determinism Control = Manual
Determinism Enable = Power
TDP control = Manual
TDP = 240
Package Power Limit Control = Manual
Package Power Limit = 240
TSME = Disabled
Memory Target Speed = DDR6400
```

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on smc Fri May 8 15:14:36 2026
```

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -5126GS-TNRT2
(H14DSG-O-CPU , AMD EPYC 9335)

SPECspeed®2017_fp_base = 414

SPECspeed®2017_fp_peak = 442

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2026

Hardware Availability: Oct-2024

Software Availability: Apr-2026

Platform Notes (Continued)

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux smc 6.8.0-111-generic #111-Ubuntu SMP PREEMPT_DYNAMIC Sat Apr 11 23:16:02 UTC 2026 x86_64 x86_64
x86_64 GNU/Linux
```

```
2. w
15:14:36 up 12:20, 1 user, load average: 7.06, 6.43, 3.94
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU   WHAT
smc       tty1     -               02:56    12:11m 0.95s  0.94s  sudo su -
```

```
3. Username
From environment variable $USER:  root
From the command 'logname':      smc
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            9287123
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -5126GS-TNRT2
(H14DSG-O-CPU , AMD EPYC 9335)

SPECspeed®2017_fp_base = 414

SPECspeed®2017_fp_peak = 442

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2026

Hardware Availability: Oct-2024

Software Availability: Apr-2026

Platform Notes (Continued)

```
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
sudo su -
sudo su -
su -
-bash
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/temlogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9335 32-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping        : 1
microcode       : 0xb00215a
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 32
siblings        : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0:  core ids 0-31
physical id 1:  core ids 0-31
physical id 0:  apicids 0-63
physical id 1:  apicids 64-127
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

-----
7. lscpu

From lscpu from util-linux 2.39.3:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:   0-127
Vendor ID:             AuthenticAMD
BIOS Vendor ID:        Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9335 32-Core Processor
BIOS Model name:       AMD EPYC 9335 32-Core Processor
                       3.0GHz
BIOS CPU family:       107
CPU family:            26
Model:                2
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):             2
Stepping:              1

Unknown CPU @
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -5126GS-TNRT2
(H14DSG-O-CPU , AMD EPYC 9335)

SPECspeed®2017_fp_base = 414

SPECspeed®2017_fp_peak = 442

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2026

Hardware Availability: Oct-2024

Software Availability: Apr-2026

Platform Notes (Continued)

Frequency boost:	enabled
CPU(s) scaling MHz:	70%
CPU max MHz:	4420.8979
CPU min MHz:	1500.0000
BogoMIPS:	5999.82
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect flush_l1d debug_swap srso_user_kernel_no
Virtualization:	AMD-V
L1d cache:	3 MiB (64 instances)
L1i cache:	2 MiB (64 instances)
L2 cache:	64 MiB (64 instances)
L3 cache:	256 MiB (8 instances)
NUMA node(s):	8
NUMA node0 CPU(s):	0-7,64-71
NUMA node1 CPU(s):	8-15,72-79
NUMA node2 CPU(s):	16-23,80-87
NUMA node3 CPU(s):	24-31,88-95
NUMA node4 CPU(s):	32-39,96-103
NUMA node5 CPU(s):	40-47,104-111
NUMA node6 CPU(s):	48-55,112-119
NUMA node7 CPU(s):	56-63,120-127
Vulnerability Gather data sampling:	Not affected
Vulnerability Indirect target selection:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:	Not affected
Vulnerability Tsa:	Not affected
Vulnerability Tsx async abort:	Not affected
Vulnerability Vmscape:	Not affected

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -5126GS-TNRT2
(H14DSG-O-CPU , AMD EPYC 9335)

SPECspeed®2017_fp_base = 414

SPECspeed®2017_fp_peak = 442

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2026

Hardware Availability: Oct-2024

Software Availability: Apr-2026

Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-7,64-71

node 0 size: 289874 MB

node 0 free: 288937 MB

node 1 cpus: 8-15,72-79

node 1 size: 290298 MB

node 1 free: 289803 MB

node 2 cpus: 16-23,80-87

node 2 size: 290298 MB

node 2 free: 289940 MB

node 3 cpus: 24-31,88-95

node 3 size: 290298 MB

node 3 free: 289599 MB

node 4 cpus: 32-39,96-103

node 4 size: 290298 MB

node 4 free: 289824 MB

node 5 cpus: 40-47,104-111

node 5 size: 290298 MB

node 5 free: 288285 MB

node 6 cpus: 48-55,112-119

node 6 size: 290254 MB

node 6 free: 289685 MB

node 7 cpus: 56-63,120-127

node 7 size: 290239 MB

node 7 free: 289605 MB

node distances:

node	0	1	2	3	4	5	6	7
0:	10	12	12	12	32	32	32	32
1:	12	10	12	12	32	32	32	32
2:	12	12	10	12	32	32	32	32
3:	12	12	12	10	32	32	32	32
4:	32	32	32	32	10	12	12	12
5:	32	32	32	32	12	10	12	12
6:	32	32	32	32	12	12	10	12
7:	32	32	32	32	12	12	12	10

9. /proc/meminfo

MemTotal: 2377585368 kB

10. who -r

run-level 5 May 8 02:54

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)

Default Target Status
graphical running

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -5126GS-TNRT2
(H14DSG-O-CPU , AMD EPYC 9335)

SPECspeed®2017_fp_base = 414

SPECspeed®2017_fp_peak = 442

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2026

Hardware Availability: Oct-2024

Software Availability: Apr-2026

Platform Notes (Continued)

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lm-sensors lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermalmd tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell ipmievdevd iscsid nftables rsync serial-getty@ ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext systemd-time-wait-sync upower
generated	openipmi
indirect	systemd-sysupdate systemd-sysupdate-reboot uuid
masked	cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/vmlinuz-6.8.0-111-generic
root=/dev/mapper/ubuntu--vg-ubuntu--lv
ro
nomodeset

14. cpupower frequency-info

analyzing CPU 127:
current policy: frequency should be within 1.50 GHz and 3.00 GHz.
The governor "performance" may decide which speed to use within this range.
boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 3000MHz

15. tuned-adm active

Current active profile: throughput-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -5126GS-TNRT2
(H14DSG-O-CPU , AMD EPYC 9335)

SPECspeed®2017_fp_base = 414

SPECspeed®2017_fp_peak = 442

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Oct-2024
Software Availability: Apr-2026

Platform Notes (Continued)

```
vm.swappiness          1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode   1
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvice madvice never
enabled     [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000
-----
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.4 LTS
-----
```

```
-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem              Type  Size  Used Avail Use% Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv ext4  877G   17G  824G   2% /
-----
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor: Supermicro
Product: Super Server
Product Family: Family
Serial: 0123456789
-----
```

```
-----
22. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  24x Micron Technology MTC40F204WS1RC64BC1 UXCX 96 GB 2 rank 6400
-----
```

```
-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 1.9
BIOS Date: 01/23/2026
BIOS Revision: 5.35
-----
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -5126GS-TNRT2
(H14DSG-O-CPU , AMD EPYC 9335)

SPECspeed®2017_fp_base = 414

SPECspeed®2017_fp_peak = 442

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Oct-2024
Software Availability: Apr-2026

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -5126GS-TNRT2
(H14DSG-O-CPU , AMD EPYC 9335)

SPECspeed®2017_fp_base = 414

SPECspeed®2017_fp_peak = 442

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Oct-2024
Software Availability: Apr-2026

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -5126GS-TNRT2
(H14DSG-O-CPU , AMD EPYC 9335)

SPECspeed®2017_fp_base = 414

SPECspeed®2017_fp_peak = 442

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2026

Hardware Availability: Oct-2024

Software Availability: Apr-2026

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

-Wl, -mllvm -Wl, -enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=2000000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -5126GS-TNRT2
(H14DSG-O-CPU , AMD EPYC 9335)

SPECspeed®2017_fp_base = 414

SPECspeed®2017_fp_peak = 442

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2026

Hardware Availability: Oct-2024

Software Availability: Apr-2026

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang
```

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3  
-Wl, -mllvm -Wl, -enable-X86-prefetching -DSPEC_OPENMP  
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math  
-fopenmp -fscalar-transform -fvector-transform  
-mllvm -reduce-array-computations=3 -Mrecursive  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

649.fotonik3d_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -5126GS-TNRT2
(H14DSG-O-CPU , AMD EPYC 9335)

SPECspeed®2017_fp_base = 414

SPECspeed®2017_fp_peak = 442

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2026

Hardware Availability: Oct-2024

Software Availability: Apr-2026

Peak Optimization Flags (Continued)

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

627.cam4_s: basepeak = yes

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fscalar-transform
-fvector-transform -Mrecursive -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -5126GS-TNRT2
(H14DSG-O-CPU , AMD EPYC 9335)

SPECspeed®2017_fp_base = 414

SPECspeed®2017_fp_peak = 442

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2026

Hardware Availability: Oct-2024

Software Availability: Apr-2026

Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Turin-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Turin-revH.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-05-08 11:14:35-0400.

Report generated on 2026-06-02 16:16:59 by CPU2017 PDF formatter v6716.

Originally published on 2026-06-02.