



# SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Supermicro

SPECmpiM\_peak2007 = 96.6

Hyper A+ Server AS -2126HS-TN (AMD EPYC 9755)

SPECmpiM\_base2007 = 96.6

MPI2007 license: 6569


Test date: Sep-2024

Test sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Apr-2024

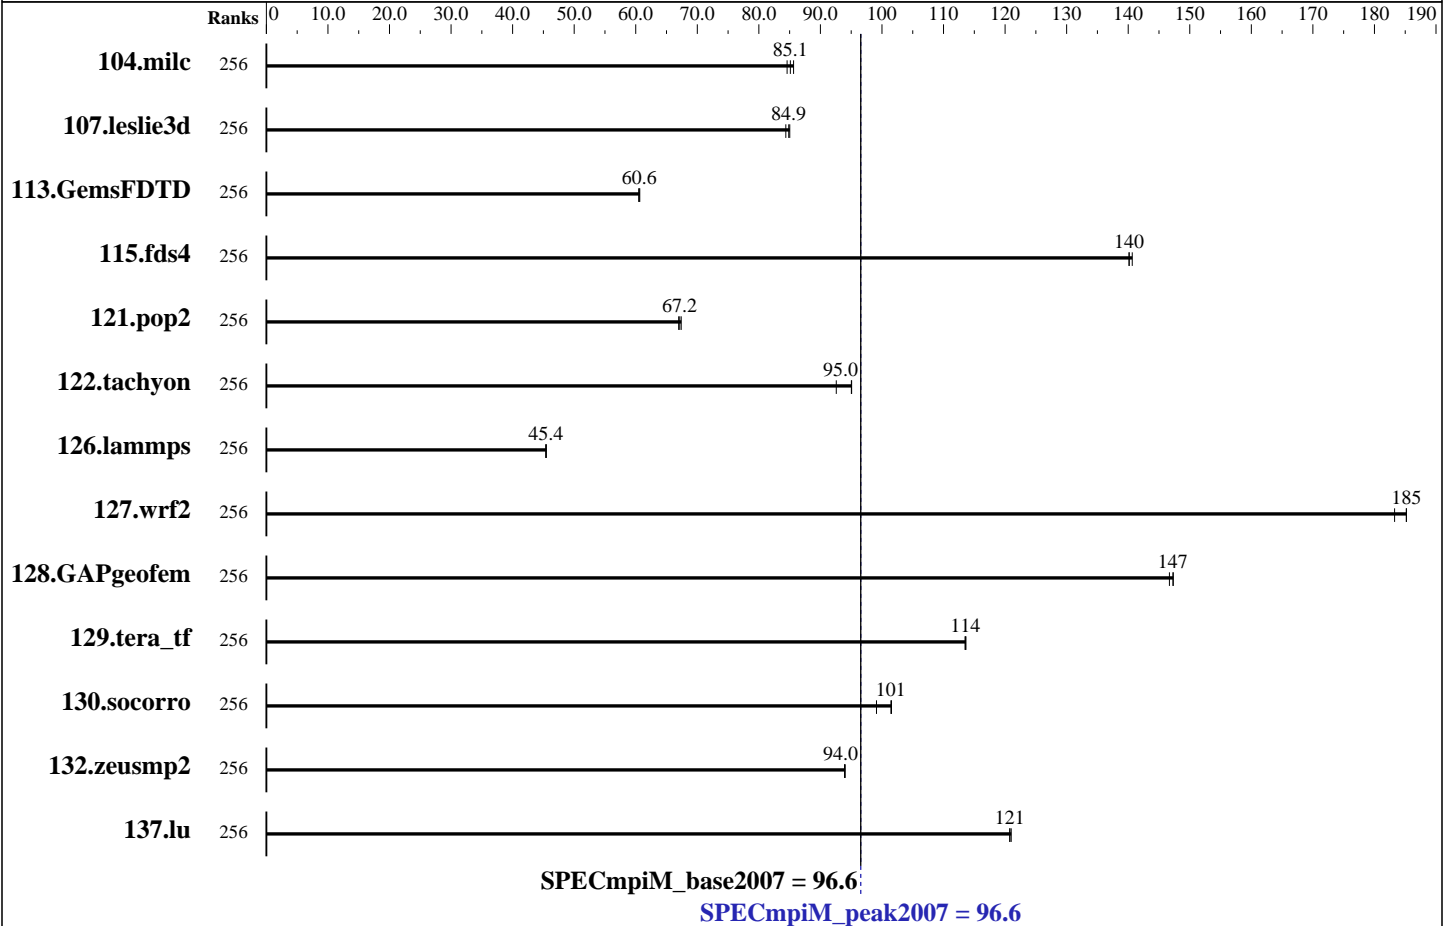

## Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
104.milc	256	18.5	84.6	<b><u>18.4</u></b>	<b><u>85.1</u></b>	18.3	85.6	256	18.5	84.6	<b><u>18.4</u></b>	<b><u>85.1</u></b>	18.3	85.6		
107.leslie3d	256	61.4	85.0	<b><u>61.5</u></b>	<b><u>84.9</u></b>	61.9	84.4	256	61.4	85.0	<b><u>61.5</u></b>	<b><u>84.9</u></b>	61.9	84.4		
113.GemsFDTD	256	104	60.7	<b><u>104</u></b>	<b><u>60.6</u></b>	104	60.5	256	104	60.7	<b><u>104</u></b>	<b><u>60.6</u></b>	104	60.5		
115.fds4	256	13.9	141	<b><u>13.9</u></b>	<b><u>140</u></b>	13.9	140	256	13.9	141	<b><u>13.9</u></b>	<b><u>140</u></b>	13.9	140		
121.pop2	256	<b><u>61.5</u></b>	<b><u>67.2</u></b>	61.6	67.0	61.3	67.4	256	<b><u>61.5</u></b>	<b><u>67.2</u></b>	61.6	67.0	61.3	67.4		
122.tachyon	256	30.2	92.6	<b><u>29.4</u></b>	<b><u>95.0</u></b>	29.4	95.1	256	30.2	92.6	<b><u>29.4</u></b>	<b><u>95.0</u></b>	29.4	95.1		
126.lammps	256	<b><u>64.2</u></b>	<b><u>45.4</u></b>	64.2	45.4	64.1	45.5	256	<b><u>64.2</u></b>	<b><u>45.4</u></b>	64.2	45.4	64.1	45.5		
127.wrf2	256	<b><u>42.1</u></b>	<b><u>185</u></b>	42.5	183	42.1	185	256	<b><u>42.1</u></b>	<b><u>185</u></b>	42.5	183	42.1	185		
128.GAPgeofem	256	14.1	147	14.0	147	<b><u>14.0</u></b>	<b><u>147</u></b>	256	14.1	147	14.0	147	<b><u>14.0</u></b>	<b><u>147</u></b>		
129.tera_tf	256	24.4	114	24.4	114	<b><u>24.4</u></b>	<b><u>114</u></b>	256	24.4	114	24.4	114	<b><u>24.4</u></b>	<b><u>114</u></b>		

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Supermicro

SPECmpiM\_peak2007 = 96.6

Hyper A+ Server AS -2126HS-TN (AMD EPYC 9755)

SPECmpiM\_base2007 = 96.6

MPI2007 license: 6569  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Sep-2024  
Hardware Availability: Oct-2024  
Software Availability: Apr-2024

### Results Table (Continued)

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
130.socorro	256	37.6	102	<b>37.6</b>	<b>101</b>	38.5	99.1	256	37.6	102	<b>37.6</b>	<b>101</b>	38.5	99.1		
132.zeusmp2	256	33.0	93.9	<b>33.0</b>	<b>94.0</b>	33.0	94.0	256	33.0	93.9	<b>33.0</b>	<b>94.0</b>	33.0	94.0		
137.lu	256	30.4	121	<b>30.4</b>	<b>121</b>	30.4	121	256	30.4	121	<b>30.4</b>	<b>121</b>	30.4	121		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

#### Hardware Summary

Type of System: Homogeneous  
Compute Node: Hyper A+ Server AS -2126HS-TN  
Total Compute Nodes: 1  
Total Chips: 2  
Total Cores: 256  
Total Threads: 256  
Total Memory: 1536 GB  
Base Ranks Run: 256  
Minimum Peak Ranks: 256  
Maximum Peak Ranks: 256

#### Software Summary

C Compiler: Intel oneAPI DPC++/C++ Compiler 2024.2.1  
C++ Compiler: Intel oneAPI DPC++/C++ Compiler 2024.2.1  
Fortran Compiler: Intel oneAPI DPC++/C++ Compiler 2024.2.1  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
MPI Library: Intel MPI Version 2021.13  
Other MPI Info: None  
Pre-processors: No  
Other Software: Jemalloc-5.3.0

### Node Description: Hyper A+ Server AS -2126HS-TN

#### Hardware

Number of nodes: 1  
Uses of the node: compute  
Vendor: Supermicro  
Model: Hyper A+ Server AS -2126HS-TN  
CPU Name: AMD EPYC 9755  
CPU(s) orderable: 1,2 chips  
Chips enabled: 2  
Cores enabled: 256  
Cores per chip: 128  
Threads per core: 1  
CPU Characteristics: Max. Boost Clock upto 4.1GHz  
CPU MHz: 2700  
Primary Cache: 32 KB I + 48 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core  
L3 Cache: 512 MB I+D on chip per chip,  
32 MB shared / 8 cores  
Other Cache: None  
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R,  
running at 6000)  
Disk Subsystem: 1 x 3.5 TB NVMe SSD  
Other Hardware: None  
Adapter: None  
Number of Adapters: 1  
Slot Type: None  
Data Rate: None  
Ports Used: 0

#### Software

Adapter: None  
Adapter Driver: None  
Adapter Firmware: None  
Operating System: Ubuntu 24.04 LTS  
6.8.0-44-generic  
Local File System: ext4  
Shared File System: None  
System State: Multi-user, run level 3  
Other Software: None

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Supermicro

SPECmpiM\_peak2007 = 96.6

Hyper A+ Server AS -2126HS-TN (AMD EPYC 9755)

SPECmpiM\_base2007 = 96.6

MPI2007 license: 6569

Test date: Sep-2024

Test sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Apr-2024

## Node Description: Hyper A+ Server AS -2126HS-TN

Interconnect Type: None

### Submit Notes

The config file option 'submit' was used.

```
mpiexec.hydra -bootstrap ssh -hosts localhost -genv I_MPI_COMPATIBILITY=3 -np $ranks -ppn $ranks $command
```

### General Notes

MPI startup command:

mpiexec.hydra command was used to start MPI jobs.

RAM configuration:

Compute nodes have 1 x 64 GB RDIMM on each memory channel.

BIOS settings:

SMT = Disabled

NUMA nodes per socket = NPS4

ACPI SRAT L3 Cache as NUMA Domain = Enabled

Determinism Control = Manual

Determinism Enable = Power

xGMI Link Configuration = 4 xGMI Links

4 Link xGMI max speed = 32Gbps

TDP Control = Manual

TDP = 500

Package Power Limit Control = Manual

Package Power Limit = 500

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Base Compiler Invocation

C benchmarks:

```
mpiicc -cc=icx
```

C++ benchmarks:

```
126.lammps: mpiicpc -cxx=icpx
```

Fortran benchmarks:

```
mpiifort -fc=ifx
```

Benchmarks using both Fortran and C:

```
mpiicc -cc=icxmpiifort -fc=ifx
```



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Supermicro

SPECmpiM\_peak2007 = 96.6

Hyper A+ Server AS -2126HS-TN (AMD EPYC 9755)

SPECmpiM\_base2007 = 96.6

MPI2007 license: 6569

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Apr-2024

## Base Portability Flags

```

104.milc: -DSPEC_MPI_LP64
115.fds4: -DSPEC_MPI_LP64
121.pop2: -DSPEC_MPI_CASE_FLAG -DSPEC_MPI_LP64
122.tachyon: -DSPEC_MPI_LP64
126.lammps: -DMPICH_IGNORE_CXX_SEEK
127.wrf2: -DSPEC_MPI_CASE_FLAG -DSPEC_MPI_LINUX -DSPEC_MPI_LP64
128.GAPgeofem: -DSPEC_MPI_LP64
130.socorro: -DSPEC_MPI_LP64
132.zeusmp2: -DSPEC_MPI_LP64

```

## Base Optimization Flags

C benchmarks:

-Ofast -ipo -march=skylake-avx512 -mtune=skylake-avx512 -ansi-alias

C++ benchmarks:

126.lammps: -Ofast -ipo -march=skylake-avx512 -mtune=skylake-avx512  
-ansi-alias

Fortran benchmarks:

-Ofast -ipo -march=skylake-avx512 -mtune=skylake-avx512  
-nostandard-realloc-lhs -align array64byte

Benchmarks using both Fortran and C:

-Ofast -ipo -march=skylake-avx512 -mtune=skylake-avx512 -ansi-alias  
-nostandard-realloc-lhs -align array64byte

## Base Other Flags

C benchmarks:

104.milc: -Wno-implicit-function-declaration -Wno-implicit-int -limf  
-Wl,--rpath=/usr/local/lib -ljemalloc

122.tachyon: -limf -Wl,--rpath=/usr/local/lib -ljemalloc

C++ benchmarks:

126.lammps: -Wno-register -limf -Wl,--rpath=/usr/local/lib -ljemalloc

Fortran benchmarks:

-limf -Wl,--rpath=/usr/local/lib -ljemalloc

Benchmarks using both Fortran and C (except as noted below):

-limf -Wl,--rpath=/usr/local/lib -ljemalloc

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Supermicro

SPECmpiM\_peak2007 = 96.6

Hyper A+ Server AS -2126HS-TN (AMD EPYC 9755)

SPECmpiM\_base2007 = 96.6

MPI2007 license: 6569

Test date: Sep-2024

Test sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Apr-2024

## Base Other Flags (Continued)

127.wrf2: -Wno-implicit-int -Wno-implicit-function-declaration -Wno-int-conversion  
-limf -Wl,--rpath=/usr/local/lib -ljemalloc

128.GAPgeofem: -Wno-implicit-function-declaration -Wno-implicit-int -limf  
-Wl,--rpath=/usr/local/lib -ljemalloc

132.zeusmp2: -Wno-implicit-function-declaration -limf  
-Wl,--rpath=/usr/local/lib -ljemalloc

## Peak Optimization Flags

C benchmarks:

104.milc: basepeak = yes

122.tachyon: basepeak = yes

C++ benchmarks:

126.lammps: basepeak = yes

Fortran benchmarks:

107.leslie3d: basepeak = yes

113.GemsFDTD: basepeak = yes

129.tera\_tf: basepeak = yes

137.lu: basepeak = yes

Benchmarks using both Fortran and C:

115.fds4: basepeak = yes

121.pop2: basepeak = yes

127.wrf2: basepeak = yes

128.GAPgeofem: basepeak = yes

130.socorro: basepeak = yes

132.zeusmp2: basepeak = yes



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Supermicro

SPECmpiM\_peak2007 = 96.6

Hyper A+ Server AS -2126HS-TN (AMD EPYC 9755)

SPECmpiM\_base2007 = 96.6

**MPI2007 license:** 6569

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Sep-2024

**Hardware Availability:** Oct-2024

**Software Availability:** Apr-2024

The flags file that was used to format this result can be browsed at

[http://www.spec.org/mpi2007/flags/Intel\\_compiler\\_flags\\_hpc.2024.html](http://www.spec.org/mpi2007/flags/Intel_compiler_flags_hpc.2024.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/mpi2007/flags/Intel\\_compiler\\_flags\\_hpc.2024.xml](http://www.spec.org/mpi2007/flags/Intel_compiler_flags_hpc.2024.xml)

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC MPI2007 v2.0.1.  
Report generated on Thu Oct 10 12:36:17 2024 by SPEC MPI2007 PS/PDF formatter v1463.  
Originally published on 10 October 2024.