



# SPEC<sup>®</sup> MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI ICE X  
(Intel Xeon E5-2690 v3, 2.6 GHz)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 61.0

MPI2007 license: 14


Test sponsor: SGI

Tested by: SGI

Test date: Jul-2014

Hardware Availability: Sep-2014

Software Availability: Apr-2014

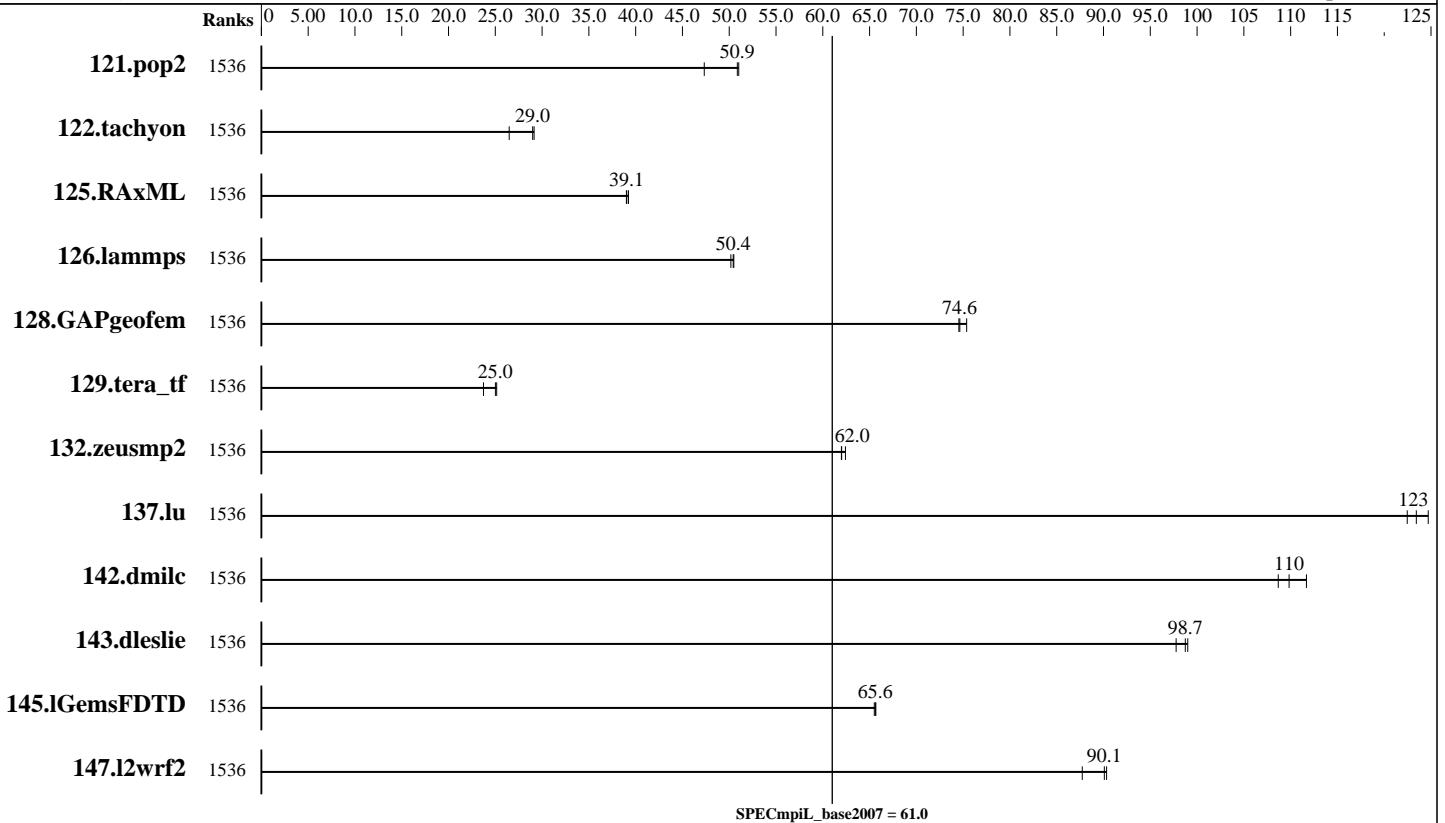

## Results Table

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
121.pop2	1536	82.2	47.3	76.3	51.0	<b>76.5</b>	<b>50.9</b>							
122.tachyon	1536	73.4	26.5	<b>67.1</b>	<b>29.0</b>	66.7	29.1							
125.RAxML	1536	74.8	39.0	74.4	39.2	<b>74.7</b>	<b>39.1</b>							
126.lammps	1536	48.7	50.5	49.0	50.2	<b>48.8</b>	<b>50.4</b>							
128.GAPgeofem	1536	<b>79.5</b>	<b>74.6</b>	79.6	74.5	78.7	75.4							
129.tera_tf	1536	43.7	25.1	<b>43.9</b>	<b>25.0</b>	46.3	23.7							
132.zeusmp2	1536	34.2	62.0	34.0	62.4	<b>34.2</b>	<b>62.0</b>							
137.lu	1536	<b>34.0</b>	<b>123</b>	33.7	125	34.3	122							
142.dmilc	1536	33.0	112	<b>33.5</b>	<b>110</b>	33.9	109							
143.dleslie	1536	<b>31.4</b>	<b>98.7</b>	31.3	99.0	31.7	97.8							
145.lGemsFDTD	1536	67.2	65.7	67.3	65.5	<b>67.2</b>	<b>65.6</b>							
147.l2wrf2	1536	90.8	90.3	<b>91.1</b>	<b>90.1</b>	93.5	87.7							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SPECmpiL\_peak2007 = Not Run

SGI ICE X  
(Intel Xeon E5-2690 v3, 2.6 GHz)

SPECmpiL\_base2007 = 61.0

MPI2007 license: 14

Test sponsor: SGI

Tested by: SGI

Test date: Jul-2014

Hardware Availability: Sep-2014

Software Availability: Apr-2014

### Hardware Summary

Type of System: Homogeneous  
 Compute Node: SGI ICE X IP-131 Compute Node  
 Interconnect: InfiniBand (MPI and I/O)  
 File Server Node: SGI Rackable C1103-TY12  
 Total Compute Nodes: 64  
 Total Chips: 128  
 Total Cores: 1536  
 Total Threads: 1536  
 Total Memory: 8 TB  
 Base Ranks Run: 1536  
 Minimum Peak Ranks: --  
 Maximum Peak Ranks: --

### Software Summary

C Compiler: Intel C++ Composer XE 2013 for Linux, Version 14.0.3.174 Build 20140422  
 C++ Compiler: Intel C++ Composer XE 2013 for Linux Version 14.0.3.174 Build 20140422  
 Fortran Compiler: Intel Fortran Composer XE 2013 for Linux, Version 14.0.3.174 Build 20140422  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 MPI Library: SGI MPT 2.09 Patch 11049  
 Other MPI Info: OFED 1.5.4  
 Pre-processors: None  
 Other Software: None

## Node Description: SGI ICE X IP-131 Compute Node

### Hardware

Number of nodes: 64  
 Uses of the node: compute  
 Vendor: SGI  
 Model: SGI ICE X (Intel Xeon E5-2690 v3, 2.6 GHz)  
 CPU Name: Intel Xeon E5-2690 v3  
 CPU(s) orderable: 1-2 chips  
 Chips enabled: 2  
 Cores enabled: 24  
 Cores per chip: 12  
 Threads per core: 1  
 CPU Characteristics: 12 Core, 2.60 GHz, 9.6 GT/s QPI  
 Intel Turbo Boost Technology up to 3.50 GHz  
 Hyper-Threading Technology disabled  
 CPU MHz: 2600  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-17000R-15, ECC)  
 Disk Subsystem: None  
 Other Hardware: None  
 Adapter: Mellanox MT27500 with ConnectX-3 ASIC (PCIe x8 Gen3 8 GT/s)  
 Number of Adapters: 2  
 Slot Type: PCIe x8 Gen3  
 Data Rate: InfiniBand 4x FDR  
 Ports Used: 2  
 Interconnect Type: InfiniBand

### Software

Adapter: Mellanox MT27500 with ConnectX-3 ASIC (PCIe x8 Gen3 8 GT/s)  
 Adapter Driver: OFED-1.5.4  
 Adapter Firmware: 2.30.3000  
 Operating System: SUSE Linux Enterprise Server 11 SP3 (x86\_64), Kernel 3.0.93-0.8-default  
 Local File System: NFSv3  
 Shared File System: NFSv3 IPoIB  
 System State: Multi-user, run level 3  
 Other Software: SGI Tempo Service Node 2.8.1, Build 709rp49.sles11sp3-1402182002



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI ICE X  
(Intel Xeon E5-2690 v3, 2.6 GHz)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 61.0

**MPI2007 license:** 14  
**Test sponsor:** SGI  
**Tested by:** SGI

**Test date:** Jul-2014  
**Hardware Availability:** Sep-2014  
**Software Availability:** Apr-2014

### Node Description: SGI Rackable C1103-TY12

#### Hardware

Number of nodes: 1  
Uses of the node: fileserver  
Vendor: SGI  
Model: SGI Rackable C1103-TY12 (Intel Xeon X5670, 2.93 GHz)  
CPU Name: Intel Xeon X5670  
CPU(s) orderable: 1-2 chips  
Chips enabled: 2  
Cores enabled: 12  
Cores per chip: 6  
Threads per core: 2  
CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
Hyper-Threading Technology enabled  
CPU MHz: 2933  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per chip  
L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 96 GB (12 \* 8 GB 2Rx4 PC3-10600R-9, ECC)  
Disk Subsystem: 12 TB RAID 6  
12 x 1 TB SATA (Seagate Constellation, 7200RPM)  
Other Hardware: None  
Adapter: Mellanox MT27500 with ConnectX-3 ASIC (PCIe x8 Gen3 8 GT/s)  
Number of Adapters: 2  
Slot Type: PCIe x8 Gen3  
Data Rate: InfiniBand 4x FDR  
Ports Used: 2  
Interconnect Type: InfiniBand

#### Software

Adapter: Mellanox MT27500 with ConnectX-3 ASIC (PCIe x8 Gen3 8 GT/s)  
Adapter Driver: OFED-1.5.2  
Adapter Firmware: 2.30.3000  
Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.46-0.3-default  
Local File System: xfs  
Shared File System: --  
System State: Multi-user, run level 3  
Other Software: SGI Foundation Software 2.5, Build 705r10.sles11-1110192111

### Interconnect Description: InfiniBand (MPI and I/O)

#### Hardware

Vendor: Mellanox Technologies and SGI  
Model: None  
Switch Model: SGI FDR Integrated IB Switch Blade 2SW9x27 with Mellanox SwitchX device 51000  
Number of Switches: 16  
Number of Ports: 36  
Data Rate: InfiniBand 4x FDR  
Firmware: 09.02.3000  
Topology: Enhanced Hypercube  
Primary Use: MPI and I/O traffic

#### Software



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI ICE X  
(Intel Xeon E5-2690 v3, 2.6 GHz)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 61.0

MPI2007 license: 14

Test sponsor: SGI

Tested by: SGI

Test date: Jul-2014

Hardware Availability: Sep-2014

Software Availability: Apr-2014

## Submit Notes

The config file option 'submit' was used.

## General Notes

### Software environment:

```
export MPI_REQUEST_MAX=65536
export MPI_TYPE_MAX=32768
export MPI_IB_RAILS=2
export MPI_CONNECTIONS_THRESHOLD=0
ulimit -s unlimited
```

### BIOS settings:

```
AMI BIOS version DY2E6044
Hyper-Threading Technology disabled
Intel Turbo Boost Technology enabled (default)
Intel Turbo Boost Technology activated with
  modprobe acpi_cpufreq
  cpupower frequency-set -u 2601MHz -d 2601MHz -g performance
```

### Job Placement:

Each MPI job was assigned to a topologically compact set of nodes, i.e. the minimal needed number of switches was used for each job: 2 switches for up to 192 ranks, 4 switches for up to 384 ranks, 8 switches for 768 ranks, and 16 switches for 1536 ranks.

### Additional notes regarding interconnect:

The Infiniband network consists of two independent planes, with half the switches in the system allocated to each plane. I/O traffic is restricted to one plane, while MPI traffic can use both planes.

## Base Compiler Invocation

### C benchmarks:

icc

### C++ benchmarks:

126.lammps: icpc

### Fortran benchmarks:

ifort

### Benchmarks using both Fortran and C:

icc ifort



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI ICE X  
(Intel Xeon E5-2690 v3, 2.6 GHz)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 61.0

MPI2007 license: 14

Test sponsor: SGI

Tested by: SGI

Test date: Jul-2014

Hardware Availability: Sep-2014

Software Availability: Apr-2014

## Base Portability Flags

121.pop2: -DSPEC\_MPI\_CASE\_FLAG

## Base Optimization Flags

C benchmarks:

-O3 -xCORE-AVX2 -no-prec-div

C++ benchmarks:

126.lammps: -O3 -xCORE-AVX2 -no-prec-div -ansi-alias

Fortran benchmarks:

-O3 -xCORE-AVX2 -no-prec-div

Benchmarks using both Fortran and C:

-O3 -xCORE-AVX2 -no-prec-div

## Base Other Flags

C benchmarks:

-lmpi

C++ benchmarks:

126.lammps: -lmpi

Fortran benchmarks:

-lmpi

Benchmarks using both Fortran and C:

-lmpi

The flags file that was used to format this result can be browsed at

[http://www.spec.org/mpi2007/flags/SGI\\_x86\\_64\\_Intel14\\_flags.20140908.html](http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel14_flags.20140908.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/mpi2007/flags/SGI\\_x86\\_64\\_Intel14\\_flags.20140908.xml](http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel14_flags.20140908.xml)



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI ICE X  
(Intel Xeon E5-2690 v3, 2.6 GHz)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 61.0

MPI2007 license: 14

Test sponsor: SGI

Tested by: SGI

Test date: Jul-2014

Hardware Availability: Sep-2014

Software Availability: Apr-2014

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC MPI2007 v2.0.1.  
Report generated on Mon Sep 8 13:45:53 2014 by SPEC MPI2007 PS/PDF formatter v1463.  
Originally published on 8 September 2014.