



SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Huawei

SPECmpiM_peak2007 = Not Run

Huawei 2288H V5 (Intel Xeon Platinum 8280 CPU, 2.70 GHz)

SPECmpiM_base2007 = 10.0

MPI2007 license: 27


Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

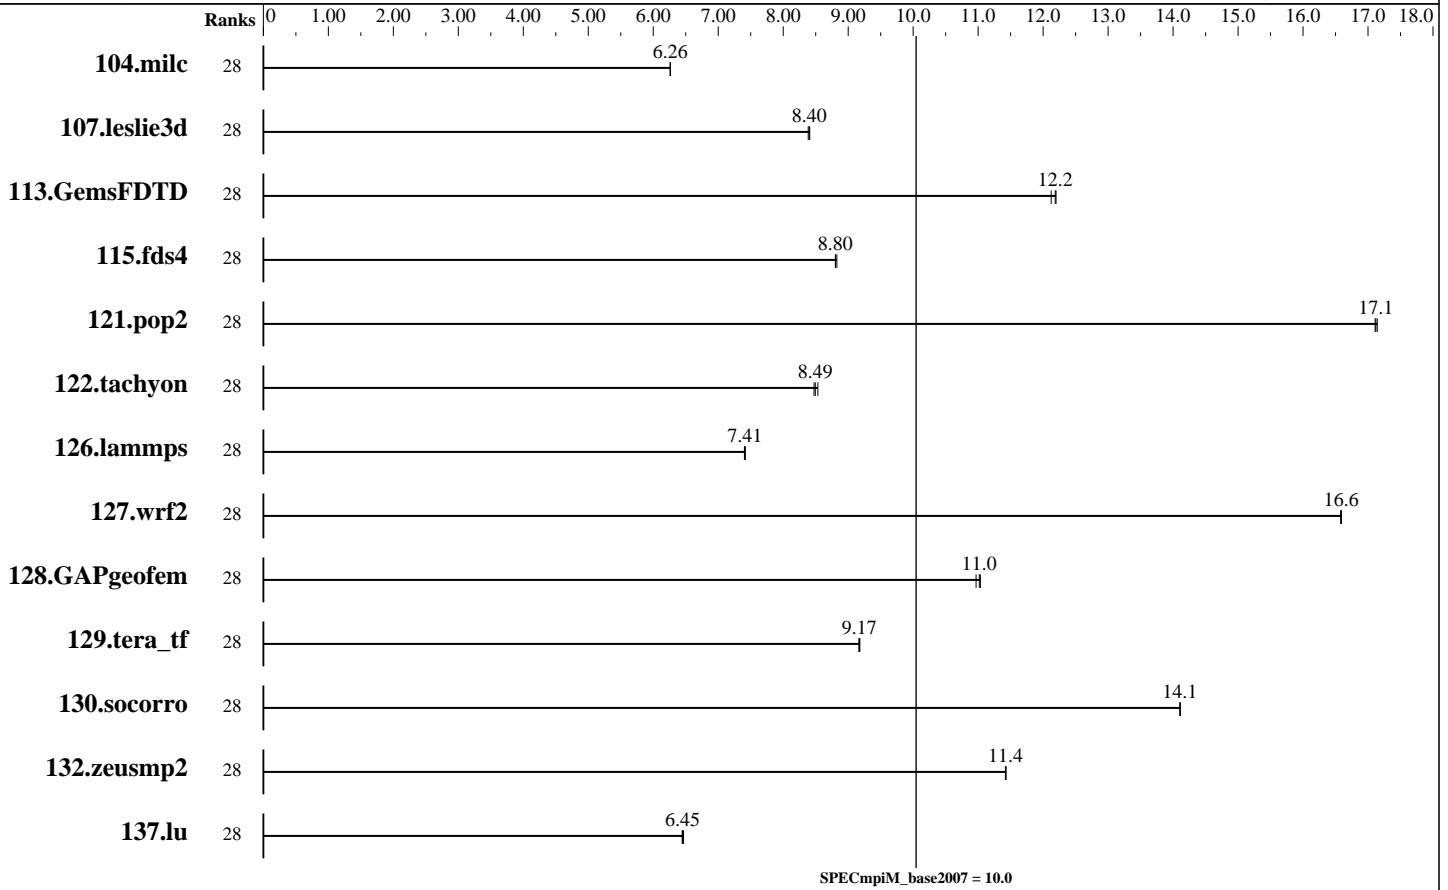

Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
104.milc	28	250	6.26	<u>250</u>	<u>6.26</u>	250	6.26									
107.leslie3d	28	621	8.41	<u>621</u>	<u>8.40</u>	623	8.38									
113.GemsFDTD	28	517	12.2	<u>518</u>	<u>12.2</u>	520	12.1									
115.fds4	28	221	8.83	<u>222</u>	<u>8.80</u>	222	8.80									
121.pop2	28	241	17.1	<u>241</u>	<u>17.1</u>	241	17.1									
122.tachyon	28	<u>329</u>	<u>8.49</u>	328	8.53	330	8.47									
126.lammps	28	<u>393</u>	<u>7.41</u>	394	7.40	393	7.42									
127.wrf2	28	470	16.6	<u>470</u>	<u>16.6</u>	470	16.6									
128.GAPgeofem	28	<u>187</u>	<u>11.0</u>	188	11.0	187	11.0									
129.tera_tf	28	302	9.18	<u>302</u>	<u>9.17</u>	302	9.16									

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Huawei

SPECmpiM_peak2007 = Not Run

Huawei 2288H V5 (Intel Xeon Platinum 8280 CPU, 2.70 GHz)

SPECmpiM_base2007 = 10.0

MPI2007 license: 27
Test sponsor: Huawei
Tested by: Huawei

Test date: Jan-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Results Table (Continued)

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
130.socorro	28	270	14.1	<u>271</u>	<u>14.1</u>	271	14.1									
132.zeusmp2	28	<u>272</u>	<u>11.4</u>	271	11.4	272	11.4									
137.lu	28	568	6.47	<u>570</u>	<u>6.45</u>	570	6.45									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Hardware Summary

Type of System: Homogeneous
 Compute Node: Huawei 2288H V5
 File Server Node: Huawei 2288H V5
 Head Node: Huawei 2288H V5
 Total Compute Nodes: 1
 Total Chips: 1
 Total Cores: 28
 Total Threads: 28
 Total Memory: 192 GB
 Base Ranks Run: 28
 Minimum Peak Ranks: --
 Maximum Peak Ranks: --

Software Summary

C Compiler: Intel C++ Composer XE 2018 for Linux, Version 18.0.5.274 Build 20180823
 C++ Compiler: Intel C++ Composer XE 2018 for Linux, Version 18.0.5.274 Build 20180823
 Fortran Compiler: Intel C++ Composer XE 2018 for Linux, Version 18.0.5.274 Build 20180823
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 MPI Library: Intel MPI Library for Linux OS, Version 2018 Update 4 Build 20180823
 Other MPI Info: None
 Pre-processors: No
 Other Software: None

Node Description: Huawei 2288H V5

Hardware

Number of nodes: 1
 Uses of the node: head, compute, fileserver
 Vendor: Huawei
 Model: Huawei 2288H V5
 CPU Name: Intel Xeon Platinum 8280
 CPU(s) orderable: 1,2 chip
 Chips enabled: 1
 Cores enabled: 28
 Cores per chip: 28
 Threads per core: 1
 CPU Characteristics: None
 CPU MHz: 2700
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: 38.5 MB I+D on chip per chip
 Other Cache: None
 Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2933Y-R)
 Disk Subsystem: 1 x 1200 GB 10K RPM SAS
 Other Hardware: None
 Adapter: N/A
 Number of Adapters: 0
 Slot Type: N/A
 Data Rate: N/A
 Ports Used: 0

Software

Adapter: N/A
 Adapter Driver: N/A
 Adapter Firmware: N/A
 Operating System: SUSE Linux Enterprise Server 12 SP4 4.12.14-94.41-default
 Local File System: xfs
 Shared File System: None
 System State: Multi-User, run level 3
 Other Software: None

Continued on next page



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Huawei

SPECmpiM_peak2007 = Not Run

Huawei 2288H V5 (Intel Xeon Platinum 8280 CPU, 2.70 GHz)

SPECmpiM_base2007 = 10.0

MPI2007 license: 27

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

Node Description: Huawei 2288H V5

Interconnect Type: N/A

Submit Notes

The config file option 'submit' was used.

General Notes

BIOS configuration:
Power Policy Set to Performance
Hyper-Threading Set to Disabled
XPT Prefetch Set to Enabled

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Base Compiler Invocation

C benchmarks:
mpiicc

C++ benchmarks:

126.lammps: mpiicpc

Fortran benchmarks:
mpiifort

Benchmarks using both Fortran and C:
mpiicc mpiifort

Base Portability Flags

121.pop2: -DSPEC_MPI_CASE_FLAG
126.lammps: -DMPICH_IGNORE_CXX_SEEK

Continued on next page



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Huawei

SPECmpiM_peak2007 = Not Run

Huawei 2288H V5 (Intel Xeon Platinum 8280 CPU, 2.70 GHz)

SPECmpiM_base2007 = 10.0

MPI2007 license: 27

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

Base Portability Flags (Continued)

127.wrf2: -DSPEC_MPI_CASE_FLAG -DSPEC_MPI_LINUX

Base Optimization Flags

C benchmarks:

-O3 -xCORE-AVX512 -no-prec-div

C++ benchmarks:

126.lammps: -O3 -xCORE-AVX512 -no-prec-div

Fortran benchmarks:

-O3 -xCORE-AVX512 -no-prec-div

Benchmarks using both Fortran and C:

-O3 -xCORE-AVX512 -no-prec-div

The flags files that were used to format this result can be browsed at

http://www.spec.org/mpi2007/flags/Huawei_x86_64_Intel_linux.20190402.html

<http://www.spec.org/mpi2007/flags/Huawei-SPECmpi2007-Platform-Settings-SKL-V1.0.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/mpi2007/flags/Huawei_x86_64_Intel_linux.20190402.xml

<http://www.spec.org/mpi2007/flags/Huawei-SPECmpi2007-Platform-Settings-SKL-V1.0.xml>

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC MPI2007 v2.0.1.

Report generated on Tue Apr 2 18:30:38 2019 by SPEC MPI2007 PS/PDF formatter v1463.

Originally published on 2 April 2019.