OMPL2001 Result

Copyright ©1999-2002, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire 6800

SPECompLpeak2001 = 79627

SPECompLbase2001 = 68051

SPEC license #:	HPG0010	Tested by:	Sun Microsystems, Palo Alto	Test site:	Sun Microsystems	Test date:	Mar-2003	Hardware Avail:	Mar-2003	Software Avail:	May-2003

Benchmark	Reference Time	Base Runtime	Base Ratio	Peak Runtime	Peak Ratio
311.wupwise_l	9200	1621	90829	1628	90405
313.swim_l	12500	5178	38621	3518	56851
315.mgrid_l	13500	3398	63568	3401	63502
317.applu_l	13500	2357	91654	2377	90885
321.equake_l	13000	4681	44431	4528	45934
325.apsi_l	10500	2140	78508	2109	79677
327.gafort_l	11000	2339	75245	2340	75209
329.fma3d_l	23500	5768	65189	5220	72026
331.art_l	25000	4469	89500	1828	218826

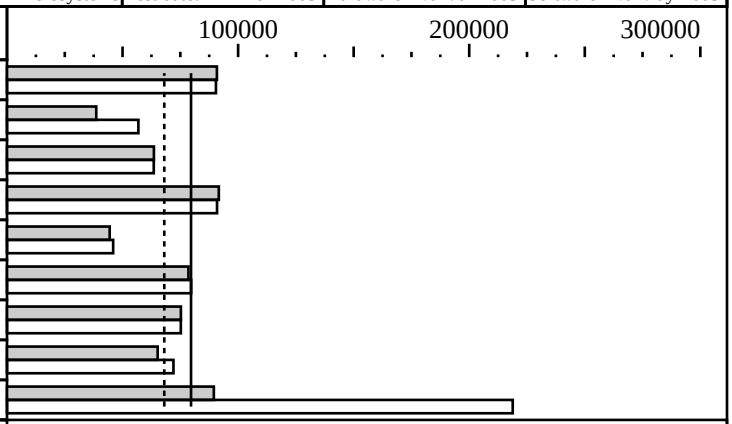

Hardware

CPU:	UltraSPARC III Cu
CPU MHz:	1200
FPU:	Integrated
CPU(s) enabled:	24
CPU(s) orderable:	2-24
Primary Cache:	32KBI+64KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	None
Other Cache:	None
Memory:	48GB 16-way interleaved
Disk Subsystem:	1X36GB 550GB (4 9X18GB Sun StorEdge T3 arrays)
Other Hardware:	--

Software

OpenMP Threads:	24
Parallel:	OpenMP
Operating System:	Solaris 9 12/02
Compiler:	Sun ONE Studio 8 (pre-FCS build 3/9) Sun Performance Library 8 (pre-FCS build 3/9)
File System:	ufs with ufs logging
System State:	Multi-User

Notes/Tuning Information

```
Base Flags:
  ONESTEP=yes for all benchmarks

  C:   -fast -xopenmp -xalias_level=std -xipo -xprefetch_level=2
       -Xc -xarch=v9a -xprofile -lmtmalloc
  f90: -fast -openmp -xarch=v9a -xipo -autopar -xprofile

Extra art Base Flags:
  331.art_l:     -DINTS_PER_CACHELINE=16 -DDBLS_PER_CACHELINE=8

Peak Flags:
  ONESTEP=yes for all benchmarks

  311.wupwise_l: -xprofile -fast -openmp -autopar -Qoption iropt
                 -Athr,-Ainline:inc=800:cp=1 -xipo=2 -xprefetch_level=3
                 -xarch=v9a -xpagesize=512k
  313.swim_l:    -fast -xautopar -xreduction -Qoption iropt
                 -Ainline:cs=700,-Atile:skewp:b216 -xarch=v9a
                 -xprefetch=latx:1.6
  315.mgrid_l:   -xprofile -fast -openmp -xarch=v9a -xipo -autopar
                 -xpagesize=512k
  317.applu_l:   -xprofile -fast -openmp -xipo=2 -Qoption iropt
                 -Aujam:inner=g -Qoption cg -Qlp-ol=1 -xarch=v9a
  321.equake_l:  -xprofile -fast -xarch=v9a -xrestrict
```

Copyright ©1999-2002, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire 6800

SPECompLpeak2001 = 79627
SPECompLbase2001 = 68051

SPEC license #: HPG0010 | Tested by: Sun Microsystems, Palo Alto | Test site: Sun Microsystems | Test date: Mar-2003 | Hardware Avail: Mar-2003 | Software Avail: May-2003

Notes/Tuning Information (Continued)

```
                  -xalias_level=strong -xopenmp
                  -W2,-Ainline:call_in_pragma -xprefetch_level=3
                  -lmtmalloc -lmopt -lm
  325.apsi_l:     -fast -autopar -openmp -xipo -xarch=v9a
  327.gafort_l:   -xprofile -fast -xarch=v9a -openmp
  329.fma3d_l:    -xprofile -fast -xarch=v9a -openmp -Qoption iropt
                  -Athr,-Apf:pdl=1 -xipo -lmtmalloc -xpagesize=512k
  331.art_l:      -xprofile -fast -xarch=v9a -xopenmp
                  -xalias_level=strong -xprefetch_level=2 -xipo=2
                  -lmopt -lm -lmtmalloc -xpagesize=512k
                  -W2,-Apf:outer=0

Alternate Source for Peak:
  Change abs to fabs for art
    Available as SPEC OMP Source: ompl2001-fabs-20030401.tar.gz
    331.art_l

Feedback is done as follows, unless otherwise noted:
  fdo_pre0:  rm -rf ./feedback.profile ./SunWS_cache
  PASS1:     -xprofile=collect:./feedback
  PASS2:     -xprofile=use:./feedback

Base and Peak User Environment:
  unlimit stacksize   (in /bin/csh)
  setenv STACKSIZE 16384
  setenv OMP_DYNAMIC FALSE
  setenv MT_BIND_PROCESSOR TRUE
  setenv MPSSTACK 4M
  setenv MPSSHEAP 4M
  setenv LD_PRELOAD mpss.so.1

Kernel Paramters (/etc/system):
  set autoup=900
  set tune_t_fsflushr=1
  set shmsys:shminfo_shmmax=0xffffffffffffffff
  set shmsys:shminfo_shmseg=512
  set segvn_comb_thrshld=-1

Sun ONE Studio 8 (FCS) will ship May 2003

System configuration details located (as of Mar 2003) at
  http://www.sun.com/servers/midrange/sunfire6800
```