



SPEC® OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECompG_peak2012 = Not Run

ThinkSystem SR655(AMD EPYC 7742 CPU, 2.25GHz)

SPECompG_base2012 = 21.6

OMP2012 license:9017


Test date: Jul-2019

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2019

Tested by: Lenovo Global Technology

Software Availability: Aug-2019

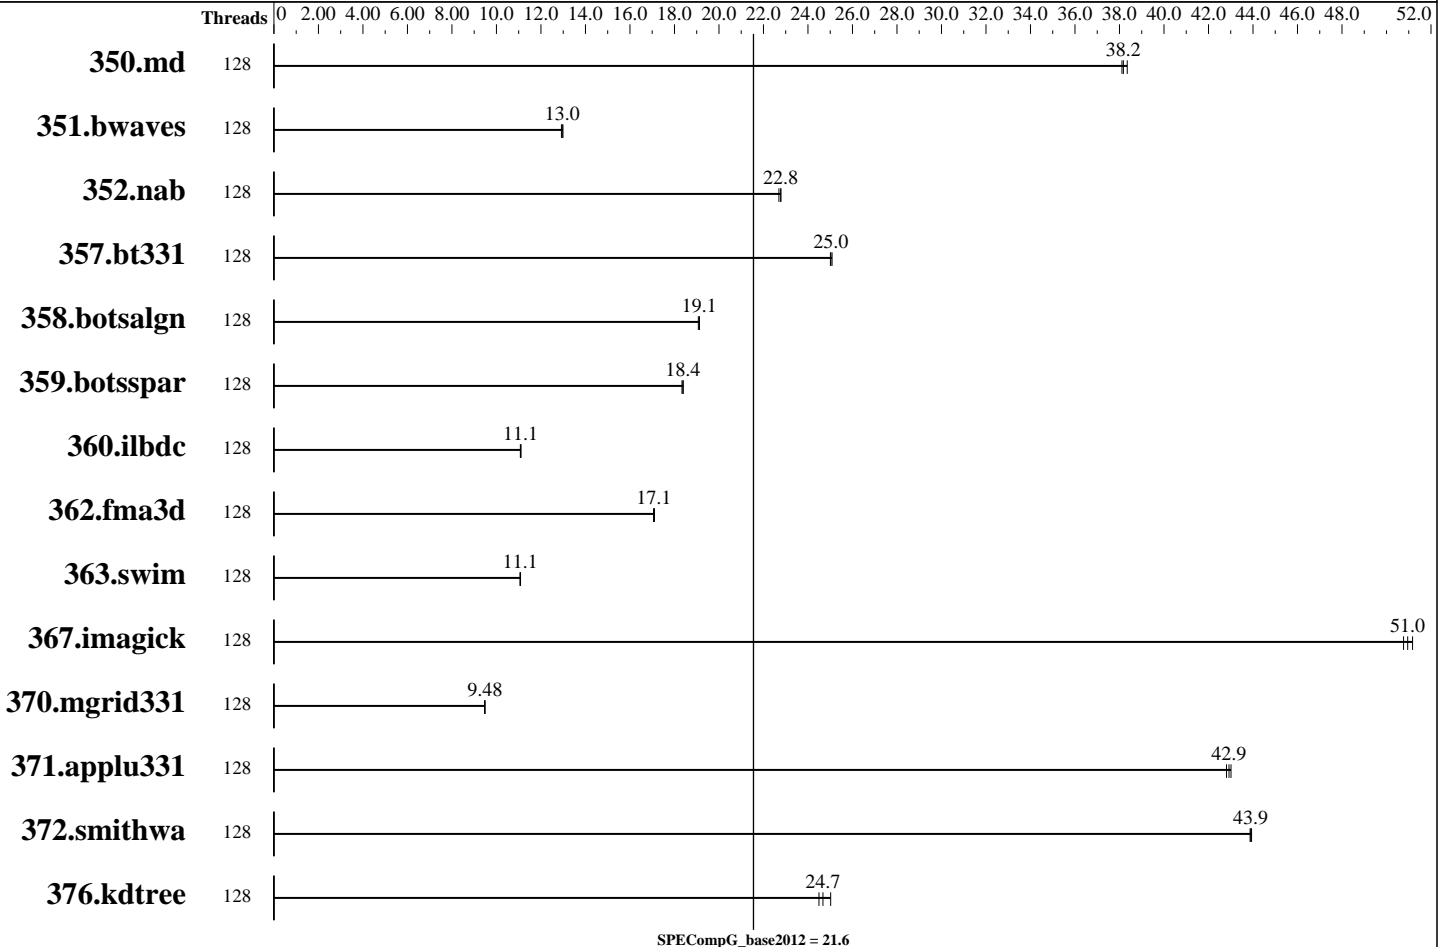

Hardware

CPU Name: AMD EPYC 7742 CPU
 CPU Characteristics: Turbo up to 3.4 GHz
 CPU MHz: 2250
 CPU MHz Maximum: 3400
 FPU: Integrated
 CPU(s) enabled: 128 cores, 1 chip, 64 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 256 MB I+D on chip per chip, 16 MB shared / 4 cores
 Other Cache: None
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R)
 Disk Subsystem: 1 x 1 TB SATA Hard Drive
 Other Hardware: None
 Base Threads Run: 128

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.6 , Kernel 3.10.0-957.el7.x86_64
 Compiler: C/C++/Fortran: Version 19.0.3.199 of Intel Parallel Studio XE for Linux 64 Build 20190206
 Auto Parallel: No
 File System: xfs
 System State: Multi-user, run level 3
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other Software: None



SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECompG_peak2012 = Not Run

ThinkSystem SR655(AMD EYPC 7742 CPU, 2.25GHz)

SPECompG_base2012 = 21.6

OMP2012 license:9017

Test date: Jul-2019

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2019

Tested by: Lenovo Global Technology

Software Availability: Aug-2019

Minimum Peak Threads: --

Maximum Peak Threads: --

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
350.md	128	121	38.3	121	38.1	<u>121</u>	<u>38.2</u>							
351.bwaves	128	351	12.9	349	13.0	<u>350</u>	<u>13.0</u>							
352.nab	128	171	22.7	171	22.8	<u>171</u>	<u>22.8</u>							
357.bt331	128	189	25.1	190	25.0	<u>189</u>	<u>25.0</u>							
358.botsalgn	128	227	19.1	<u>228</u>	<u>19.1</u>	228	19.1							
359.botsspar	128	285	18.4	<u>286</u>	<u>18.4</u>	286	18.3							
360.ilbdc	128	<u>321</u>	<u>11.1</u>	321	11.1	321	11.1							
362.fma3d	128	<u>223</u>	<u>17.1</u>	223	17.1	222	17.1							
363.swim	128	409	11.1	<u>409</u>	<u>11.1</u>	409	11.1							
367.imagick	128	137	51.2	138	50.8	<u>138</u>	<u>51.0</u>							
370.mgrid331	128	467	9.47	466	9.49	<u>466</u>	<u>9.48</u>							
371.applu331	128	141	43.0	142	42.8	<u>141</u>	<u>42.9</u>							
372.smithwa	128	122	43.9	<u>122</u>	<u>43.9</u>	122	43.9							
376.kdtree	128	<u>182</u>	<u>24.7</u>	180	25.0	184	24.5							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

```

Sysinfo program /home/omp2012/Docs/sysinfo
$Rev: 395 $ $Date:: 2012-07-25 #$ 8f8c0fe9e19c658963ale67685e50647
running on AMD2U Tue Jul 16 18:39:06 2019

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/omp2012/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : AMD EPYC 7742 64-Core Processor
 1 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 64
siblings  : 128
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21
22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46
47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63
cache size : 512 KB

```

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECompG_peak2012 = Not Run

ThinkSystem SR655(AMD EYPC 7742 CPU, 2.25GHz)

SPECompG_base2012 = 21.6

OMP2012 license:9017

Test date: Jul-2019

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2019

Tested by: Lenovo Global Technology

Software Availability: Aug-2019

Platform Notes (Continued)

```

From /proc/meminfo
MemTotal:      263788332 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.6 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.6"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server

uname -a:
Linux AMD2U 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018 x86_64
x86_64 x86_64 GNU/Linux

run-level 3 Jul 17 02:34

SPEC is set to: /home/omp2012
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs      876G   42G  834G   5% /home

Additional information from dmidecode:
BIOS Lenovo CFE103A 07/04/2019
Memory:
8x 32 GB
8x Samsung M393A4K40DB2-CWE 32 GB 3200 MT/s 2 rank
8x Unknown Unknown

(End of data from sysinfo program)

```

General Notes

```

=====
General OMP Library Settings
ENV_KMP_AFFINITY = granularity=fine,proclist=[0-3,4-7,8-11,
12-15,16-19,20-23,24-27,28-31,32-35,36-39,
40-43,44-47,48-51,52-55,56-59,60-63,64-67,
68-71,72-75,76-79,80-83,84-87,88-91,92-95,
96-99,100-103,104-107,108-111,112-115,
116-119,120-123,124-127],explicit
ENV_KMP_STACKSIZE = 292M
ENV_KMP_BLOCKTIME = infinite
ENV_KMP_LIBRARY = turnaround

```

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECompG_peak2012 = Not Run

ThinkSystem SR655(AMD EYPC 7742 CPU, 2.25GHz)

SPECompG_base2012 = 21.6

OMP2012 license:9017

Test date: Jul-2019

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2019

Tested by: Lenovo Global Technology

Software Availability: Aug-2019

General Notes (Continued)

ENV_OMP_DYNAMIC = FALSE
ENV_OMP_NESTED = FALSE
ENV_OMP_SCHEDULE = staic

BIOS Setting notes:

Choose Operating Mode set to Maximum Performance
NUMA nodes per socket set as NPS4
LLC as NUMA node set as Enabled
EfficiencyModeEn set as Auto
SVM Mode set as Disabled
IOMMU set as Disabled

Yes: The test sponsor attests, as of date of publication, the CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, the CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Spectre variant 2) is mitigated in the system as tested and documented.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Base Portability Flags

350.md: -FR
357.bt331: -mmodel=medium
363.swim: -mmodel=medium
367.imagick: -std=c99

Base Optimization Flags

C benchmarks:
-O3 -qopenmp -march=core-avx2 -no-prec-div
-qopt-streaming-stores=auto -unroll-aggressive -ansi-alias

C++ benchmarks:
-O3 -qopenmp -march=core-avx2 -no-prec-div
-qopt-streaming-stores=auto -unroll-aggressive -ansi-alias

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECCompG_peak2012 = Not Run

ThinkSystem SR655(AMD EYPC 7742 CPU, 2.25GHz)

SPECCompG_base2012 = 21.6

OMP2012 license:9017

Test date: Jul-2019

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2019

Tested by: Lenovo Global Technology

Software Availability: Aug-2019

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-O3 -qopenmp -march=core-avx2 -no-prec-div
-qopt-streaming-stores=auto -unroll-aggressive -align array64byte
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/omp2012/flags/Lenovo-OMP2012-Rome7742.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/omp2012/flags/Lenovo-OMP2012-Rome7742.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC OMP2012 v1.0.
Report generated on Wed Aug 7 18:57:45 2019 by SPEC OMP2012 PS/PDF formatter v541.
Originally published on 6 August 2019.