SPEC CINT95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP 9000 Model J200

SPECint_rate95 = 32.7

SPECint_base_rate95 = 32.7

SPEC license # 3	Tested By: HP Cupertino, CA	Test Date: Aug-95	Hardware Avail: Aug-95	Software Avail: Aug-95

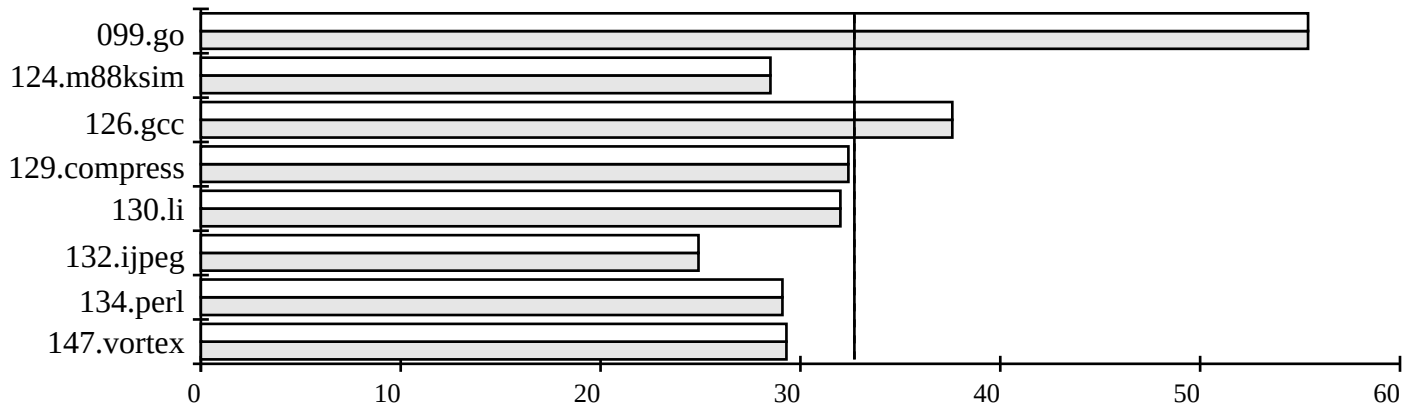

Hardware/Software Configuration for:
HP 9000 Model J200

Hardware

Model Name:	J200
CPU:	100 MHz PA-RISC 7200
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	256KBI+256KBD off-chip
Secondary Cache:	None
Other Cache:	None
Memory:	256MB
Disk Subsystem:	1 Fast/Wide SCSI-2 1.0 GB
Other Hardware:	Ethernet

Software

Operating System:	HP-UX B.10.01
Compiler:	HP92453-01 A.10.13 HP C Compiler
File System:	HP-UX
System State:	Multi-user

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
099.go	1	748	55.4	1	748	55.4
124.m88ksim	1	599	28.5	1	599	28.5
126.gcc	1	407	37.6	1	407	37.6
129.compress	1	500	32.4	1	500	32.4
130.li	1	535	32.0	1	535	32.0
132.ijpeg	1	867	24.9	1	867	24.9
134.perl	1	587	29.1	1	587	29.1
147.vortex	1	828	29.3	1	828	29.3
SPECint_base_rate95 (G. Mean)			32.7			
SPECint_rate95 (G. Mean)						32.7

Notes/Tuning Information

```
Portability:  126.gcc: -DUSG
Linker Flags:  -Wl,-aarchive
Baseline Flags:  +P +Oall +Onoregionsched
+P indicates feedback directed optimization was used.
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org