SPEC CINT95 Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP 9000 Series 700 Model 715/100XC

SPECint95 = 3.33

SPECint_base95 = 3.33

SPEC license # 3	Tested By: HP Cupertino, CA	Test Date: Aug-95	Hardware Avail: Jun-95	Software Avail: Jan-96

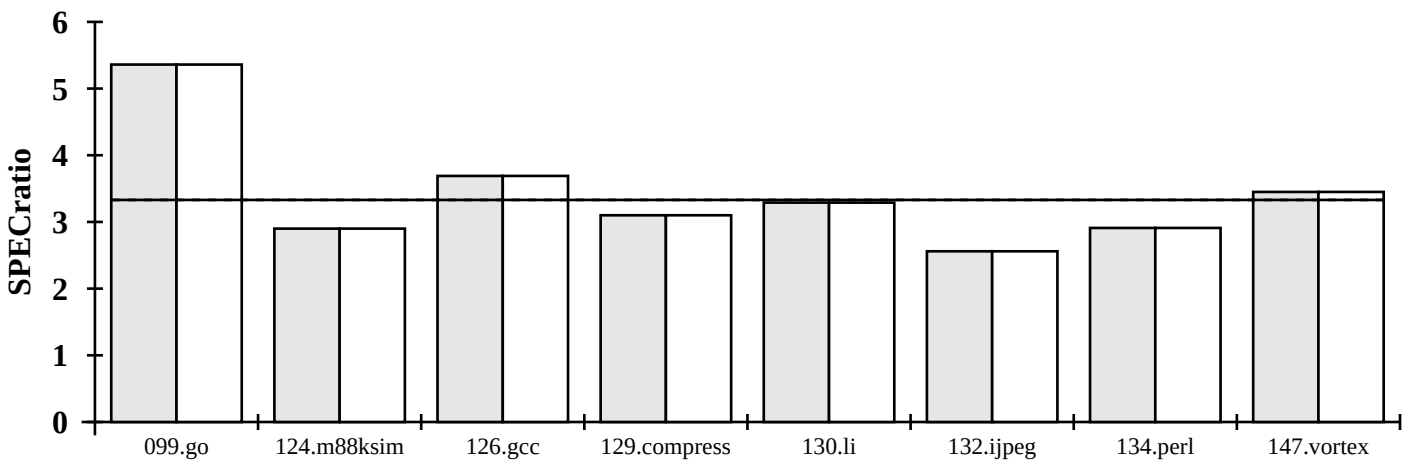

Hardware/Software Configuration for:
HP 9000 Series 700 Model 715/100XC

Hardware

Model Name:	HP 9000 Series 700 Model 715/100XC
CPU:	100 MHz PA-RISC 7100LC
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	1MB(I+D) off-chip
Secondary Cache:	None
Other Cache:	None
Memory:	64MB
Disk Subsystem:	1 SCSI-2 ST32430N 2 GB
Other Hardware:	Ethernet

Software

Operating System:	HP-UX B.10.10
Compiler:	HP92453-01 W.10.01 HP C Compiler
File System:	HP-UX
System State:	Multi-user

Benchmark # and Name	Reference Time	Base Run Time	Base SPEC Ratio	Run Time	SPEC Ratio
099.go	4600	858	5.36	858	5.36
124.m88ksim	1900	654	2.90	654	2.90
126.gcc	1700	461	3.69	461	3.69
129.compress	1800	580	3.10	580	3.10
130.li	1900	578	3.29	578	3.29
132.ijpeg	2400	937	2.56	937	2.56
134.perl	1900	652	2.91	652	2.91
147.vortex	2700	783	3.45	783	3.45
SPECint_base95 (G. Mean)			3.33		
		SPECint95 (G. Mean)			3.33

Notes/Tuning Information

```
PORTABILITY FLAGS:
All: -Ae
126: -Ae -DUSG

BASE FLAGS:
All: +Oall +Onoregionsched +P
Linker Flag: All: -Wl,-a,archive

PEAK FLAGS:
Same as BASE FLAGS.

Note: The +P indicates the use of profile based optimization.
```