SPEC CINT95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP 9000 Model C100

SPECint_rate95 = 33.0

SPECint_rate_base95 = 33.0

SPEC license # 3	Tested By: HP Cupertino, CA	Test Date: Aug-95	Hardware Avail: Nov-95	Software Avail: Jun-95

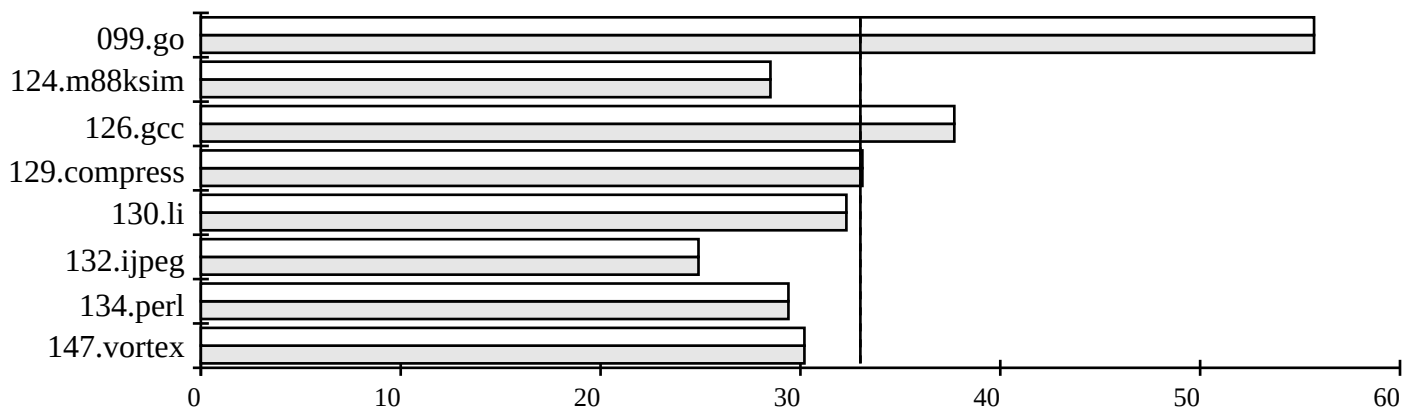

Hardware/Software Configuration for:
HP 9000 Model C100

Hardware

Model Name:	HP 9000 Model C100
CPU:	100 MHz PA-RISC 7200
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	256KBI+256KBD off-chip
Secondary Cache:	None
Other Cache:	None
Memory:	256MB
Disk Subsystem:	1 Fast/Wide SCSI-2 1.0 GB
Other Hardware:	Ethernet

Software

Operating System:	HP-UX B.10.01
Compiler:	HP92453-01 A.10.13 HP C Compiler
File System:	HP-UX
System State:	Multi-user
Kernel Extensions:	Increased: maxdsiz, maxssiz

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
099.go	1	743	55.7	1	743	55.7
124.m88ksim	1	600	28.5	1	600	28.5
126.gcc	1	405	37.7	1	405	37.7
129.compress	1	490	33.1	1	490	33.1
130.li	1	530	32.3	1	530	32.3
132.ijpeg	1	867	24.9	1	867	24.9
134.perl	1	581	29.4	1	581	29.4
147.vortex	1	803	30.2	1	803	30.2
SPECint_rate_base95 (G. Mean)			33.0			
SPECint_rate95 (G. Mean)						33.0

Notes/Tuning Information

```
PORTABILITY:
All: -Ae
126.gcc: -Ae -DUSG

BASE FLAGS:
All: +Oall +Onoregionsched +P -Wl,-aarchive

PEAK FLAGS:
Same as BASE.

Note: The +P indicates the use of profile based optimizatio
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org