SPEC CINT95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP 9000 Model C110

SPECint_rate95 = 39.7

SPECint_rate_base95 = 39.7

SPEC license # 3	Tested By: HP Cupertino, CA	Test Date: Aug-95	Hardware Avail: Nov-95	Software Avail: Jun-95

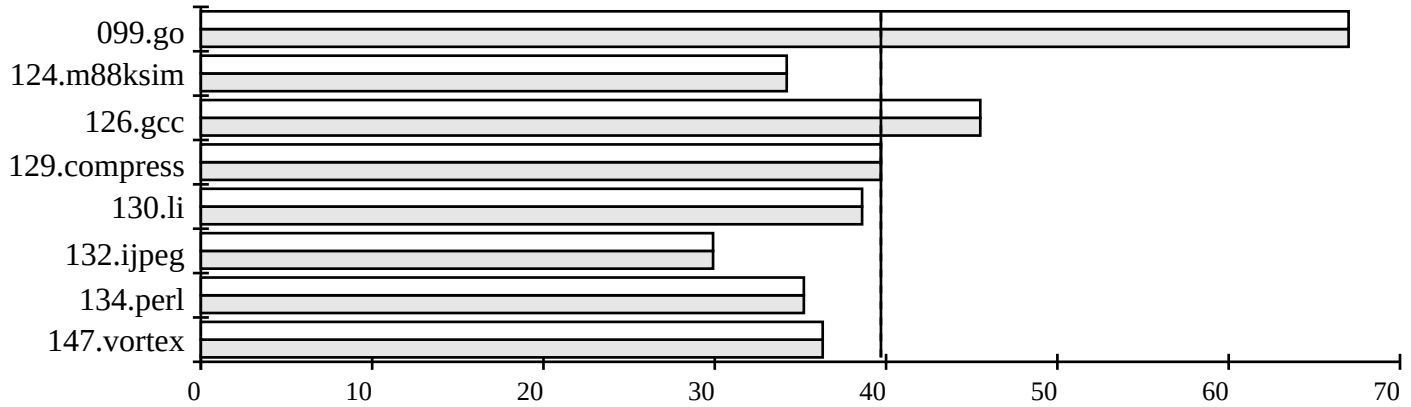

Hardware/Software Configuration for:
HP 9000 Model C110

Hardware

Model Name:	HP 9000 Model C110
CPU:	120 MHz PA-RISC 7200
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	256KBI+256KBD off-chip
Secondary Cache:	None
Other Cache:	None
Memory:	256MB
Disk Subsystem:	1 Fast/Wide SCSI-2 1.0 GB
Other Hardware:	Ethernet

Software

Operating System:	HP-UX B.10.01
Compiler:	HP92453-01 A.10.13 HP C Compiler
File System:	HP-UX
System State:	Multi-user
Kernel Extensions:	Increased: maxdsiz, maxssiz

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
099.go	1	617	67.0	1	617	67.0
124.m88ksim	1	500	34.2	1	500	34.2
126.gcc	1	337	45.5	1	337	45.5
129.compress	1	408	39.7	1	408	39.7
130.li	1	444	38.6	1	444	38.6
132.ijpeg	1	722	29.9	1	722	29.9
134.perl	1	486	35.2	1	486	35.2
147.vortex	1	670	36.3	1	670	36.3
SPECint_rate_base95 (G. Mean)			39.7			
SPECint_rate95 (G. Mean)						39.7

Notes/Tuning Information

```
PORTABILITY:
All: -Ae
126.gcc: -Ae -DUSG

BASE FLAGS:
All: +Oall +Onoregionsched +P -Wl,-aarchive

PEAK FLAGS:
Same as BASE.

Note: The +P indicates the use of profile based optimizatio
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org