SPEC CINT95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP 9000 Model D250 2-CPU

SPECint_rate95 = 89.0

SPECint_rate_base95 = 80.6

SPEC license # 3	Tested By: HP Cupertino, CA	Test Date: Sep-95	Hardware Avail: Mar-95	Software Avail: Jul-96

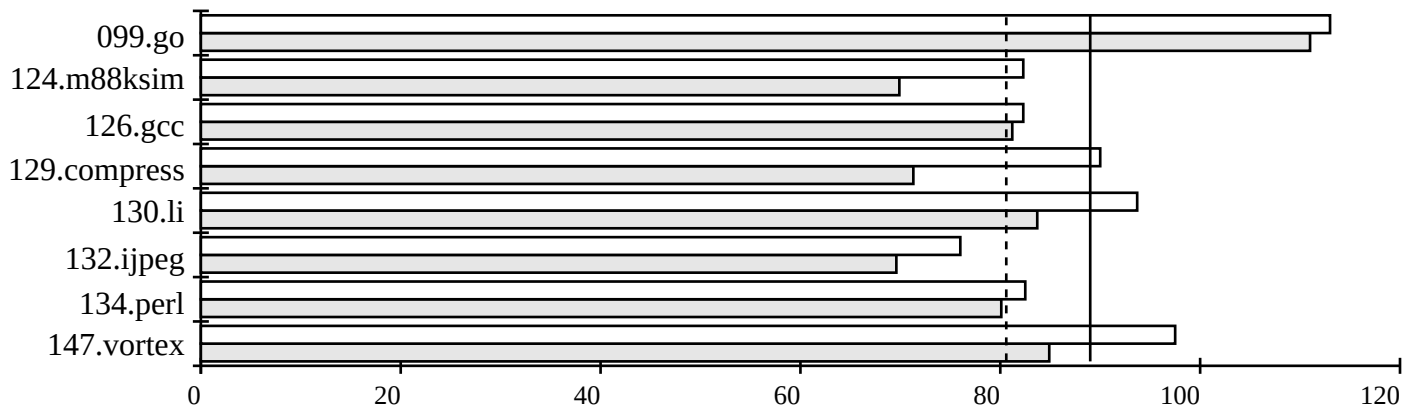

Hardware/Software Configuration for:
HP 9000 Model D250 2-CPU

Hardware

Model Name:	HP 9000 Model D250 2-CPU
CPU:	100 MHz PA-RISC 7200
FPU:	Integrated
Number of CPU(s):	2
Primary Cache:	256KBI+ 256KBD off-chip
Secondary Cache:	None
Other Cache:	None
Memory:	512MB
Disk Subsystem:	1 Fast/Wide SCSI-2 1.0 GB
Other Hardware:	None

Software

Operating System:	HP-UX B.10.20
Compiler:	HP92453-01 A.10.32.03 HP C Compiler
File System:	HP-UX
System State:	Multi-user

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
099.go	2	746	111	2	732	113
124.m88ksim	2	489	69.9	2	416	82.3
126.gcc	2	377	81.2	2	372	82.3
129.compress	2	455	71.3	2	360	90.0
130.li	2	409	83.7	2	365	93.7
132.ijpeg	2	621	69.6	2	568	76.0
134.perl	2	427	80.1	2	415	82.5
147.vortex	2	573	84.9	2	498	97.5
SPECint_rate_base95 (G. Mean)			80.6			
SPECint_rate95 (G. Mean)						89.0

Notes/Tuning Information

```
Portability Flags (base & peak): All: -Ae

Base Flags:
All: fastmem.o +Oall +I/+P
Linker Flag:  All: -Wl,-aarchive

Peak Flags:
All: +ESfic +ESlit +O4 +I/+P
099: +Oentrysched +Olibcalls +nofastaccess +Onolimit +Onoloop_unroll +Optrs_strongly_typed +Ostaticprediction
124: +Oaggressive +Onoparmsoverlap +Optrs_strongly_typed +Ostaticprediction
126: -DSPEC +Olibcalls +Onolimit +Ostaticprediction
129: +Olibcalls +Onofltacc +Onolimit +Optrs_strongly_typed +Owhole_program_mode
130: -lm +ESsfc +Oentrysched +Olibcalls +Onolimit +Onoloop_unroll +Onoptrs_to_globals +Owhole_program_mode
132: +ESsfc +Olibcalls +Onolimit +Optrs_strongly_typed +Owhole_program_mode
134: fastmem.o -lm +Olibcalls +Onolimit +Owhole_program_mode
147: fastmem.o -lm +Oentrysched +Olibcalls +Onolimit +Onoloop_unroll +Optrs_strongly_typed
+Ostaticprediction +Ofltacc +Owhole_program_mode +DC7200
Linker Flag:  All: -Wl,-aarchive
Note: The +I/+P indicates the use of profile based optimization.
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org