SPECweb96 Result

©Copyright 1996, Standards Performance Evaluation Corporation

Hewlett-Packard
HP Visualize B160L

SPECweb96= 505

Test Date : Jan-97

Tested by : HP Cupertino, CA.

Hardware Avail:	Jun-97	OS Avail:	Feb-97	HTTP Software Avail:	Jan-97	SPEC license #:	3

Throughput ops/sec	Response msec
51	7.9
102	8.7
153	11.1
204	11.6
255	13.7
306	16.7
357	20.2
408	24.5
459	31.3
491	38.3
495	40.2
499	41.4
504	43.3
505	44.4

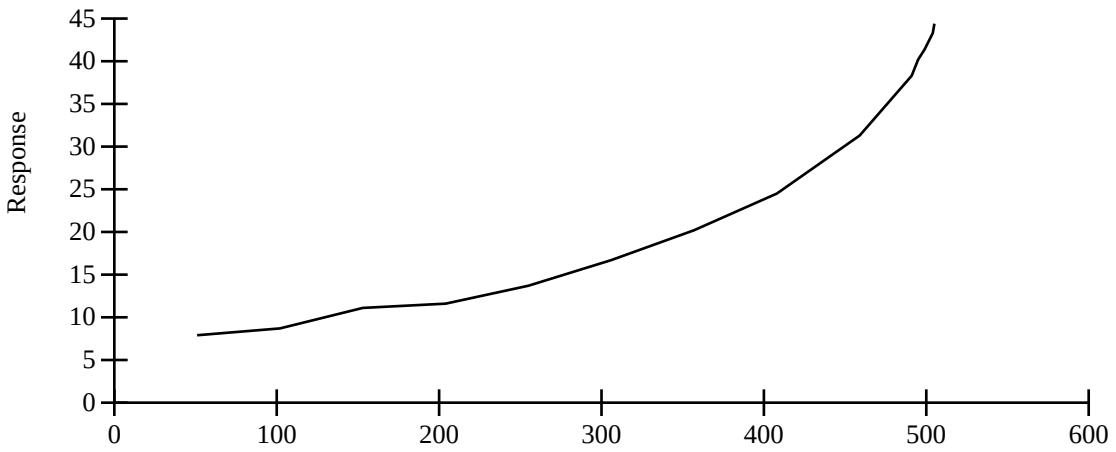

Hardware

Model Name:	HP Visualize B160L
Processor:	160MHz PA-7300LC
# of Processors:	1
Primary Cache:	64KB(I+D) on chip
Secondary Cache:	1MB(I+D) off chip
Other Cache:	None
Memory:	384 MB
Disk Subsystem:	2 2GB SE-SCSI drives
Disk Controllers:	Built-in SE SCSI
Other Hardware:	None

Software

Operating System:	HP-UX B.10.20
File System:	HFS
Other Software:	PHNE_9107

HTTP Software

Vendor:	Zeus Technology, Ltd.
HTTP Software:	Zeus 1.1.5
# of "threads":	3
Server Cache:	Default
Log Mode:	Commmon

Network

# of Controllers:	1
Network Controllers:	HP B5509AA 100Base-T PCI LAN Adapter
# of Nets:	1
Type of Nets:	100Base-TX
Network Speed:	100 Mbit
Time Wait (secs):	60 (Non RFC1122)

Load Generators

# of Load Generators:	3
# of Processes Each:	16
Model:	HP 9000 Model H50
Processor:	96MHz PA-7100
# of CPUs:	1
Memory:	256 MB
OS:	HP-UX B.10.10
Compiler:	HP92453-01 A.10.32.03 HP C Compiler

Benchmark Configuration

Max Requested Load:	510
Max Fileset Size (MB):	493

Notes/Tuning Information

```
dbc_max_pct 5, ninode 8192, maxdsiz 0x08000000
adb tcp_hash_size 4096, so_qlimit_max 0x100
nettune ip_intrqmax 100
workload data files permissions set to 0755
Clients were on FDDI and joined to the server with a 3Com LANPlex 6004
Zeus software started -b 700000 -t 900 -l 200 -q
B160L available today; B5509AA available Jun-97
1 2GB disk used for OS/Swap/Content, the other for logs
```

For More Information contact

SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110

(703) 331-0180
info@specbench.org
http://www.specbench.org/