



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp®2006 = 22.3

Motherboard H8QI6-F, AMD Opteron 8435

SPECfp_base2006 = 18.4

CPU2006 license: 001176


Test date: Nov-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

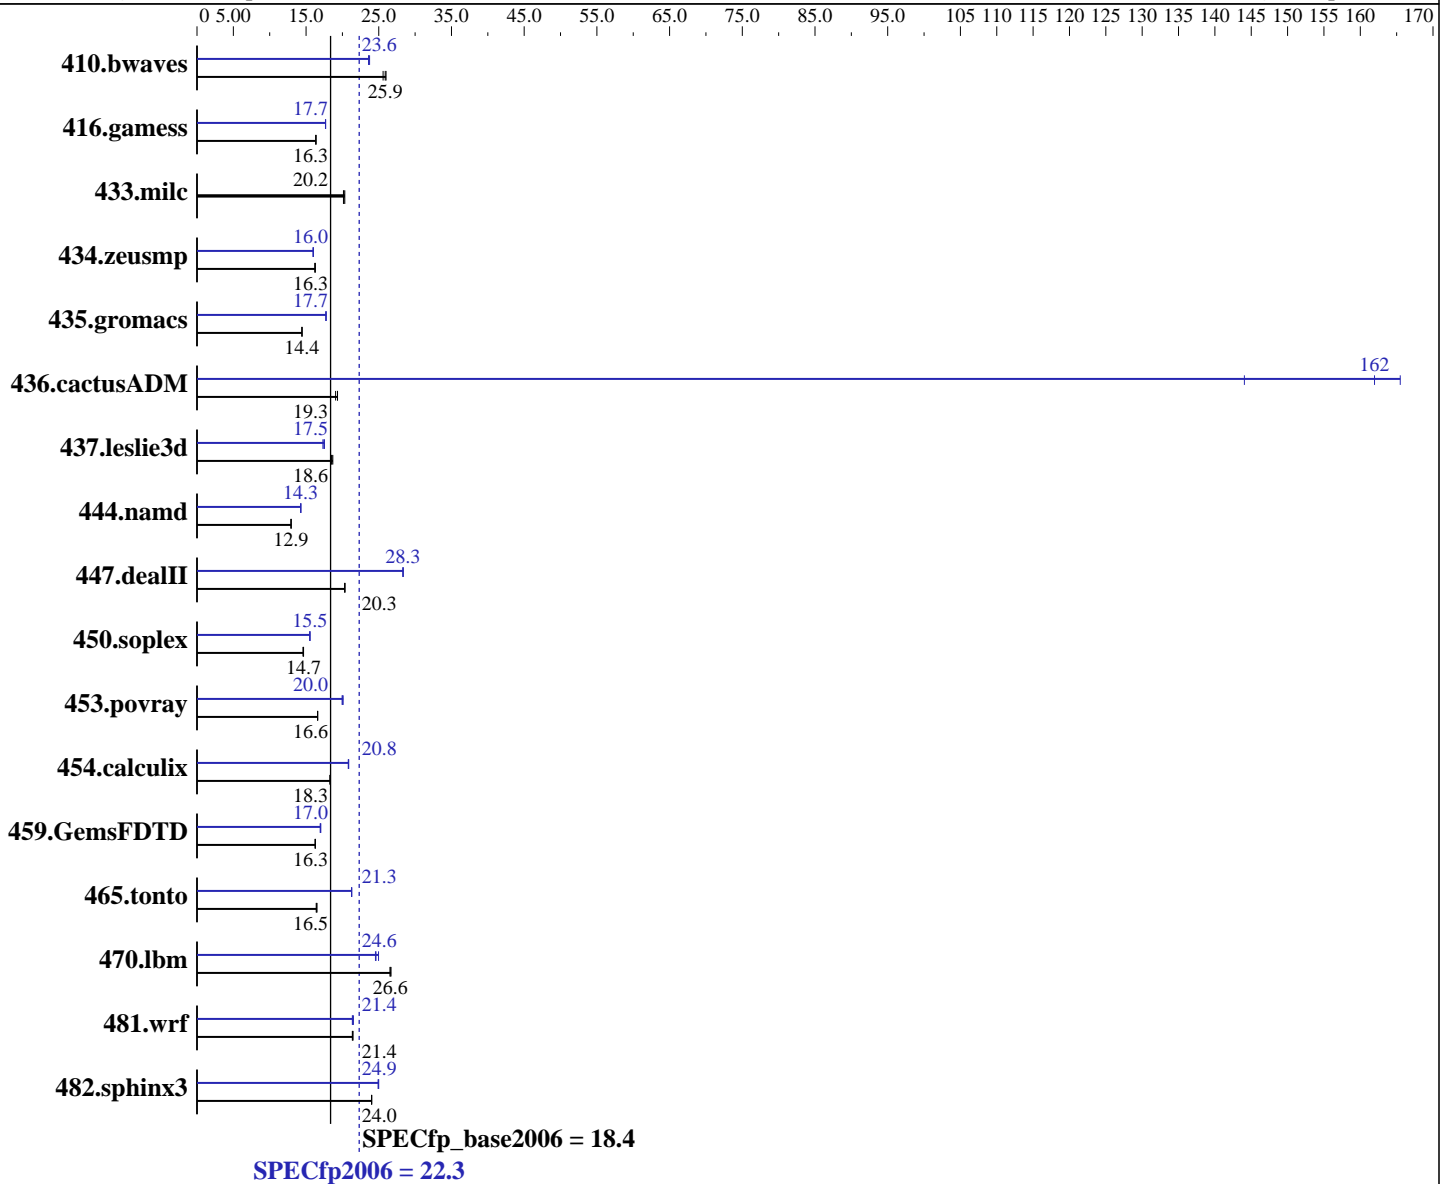

SPECfp2006 = 22.3

Hardware

CPU Name: AMD Opteron 8435
 CPU Characteristics:
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 5.4, Advanced Platform, Kernel 2.6.18-164.el5
 Compiler: PGI Server Complete Version 8.0
 x86 Open64 4.2.2 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 2 (Local multiuser without remote network)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 22.3

Motherboard H8QI6-F, AMD Opteron 8435

SPECfp_base2006 = 18.4

CPU2006 license: 001176

Test date: Nov-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (16x4 GB, DDR2-800, CL5, Reg, Dual Rank)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: binutils 2.18

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	531	25.6	523	26.0	<u>525</u>	<u>25.9</u>	576	23.6	<u>575</u>	<u>23.6</u>	573	23.7
416.gamess	1198	16.3	<u>1198</u>	<u>16.3</u>	1196	16.4	1108	17.7	1106	17.7	<u>1108</u>	<u>17.7</u>
433.milc	456	20.1	<u>454</u>	<u>20.2</u>	452	20.3	456	20.1	<u>454</u>	<u>20.2</u>	452	20.3
434.zeusmp	562	16.2	560	16.3	<u>560</u>	<u>16.3</u>	570	16.0	568	16.0	<u>570</u>	<u>16.0</u>
435.gromacs	495	14.4	494	14.4	<u>494</u>	<u>14.4</u>	<u>402</u>	<u>17.7</u>	403	17.7	402	17.8
436.cactusADM	<u>618</u>	<u>19.3</u>	627	19.1	618	19.3	<u>73.8</u>	<u>162</u>	72.2	165	83.0	144
437.leslie3d	503	18.7	508	18.5	<u>506</u>	<u>18.6</u>	543	17.3	536	17.5	<u>539</u>	<u>17.5</u>
444.namd	619	13.0	620	12.9	<u>620</u>	<u>12.9</u>	561	14.3	<u>562</u>	<u>14.3</u>	562	14.3
447.dealII	563	20.3	<u>562</u>	<u>20.3</u>	562	20.3	<u>404</u>	<u>28.3</u>	404	28.3	403	28.4
450.soplex	569	14.7	<u>569</u>	<u>14.7</u>	572	14.6	536	15.5	<u>537</u>	<u>15.5</u>	538	15.5
453.povray	320	16.6	<u>321</u>	<u>16.6</u>	321	16.6	<u>266</u>	<u>20.0</u>	266	20.0	265	20.1
454.calculix	450	18.3	451	18.3	<u>451</u>	<u>18.3</u>	395	20.9	<u>396</u>	<u>20.8</u>	397	20.8
459.GemsFDTD	653	16.2	652	16.3	<u>652</u>	<u>16.3</u>	<u>625</u>	<u>17.0</u>	626	16.9	623	17.0
465.tonto	<u>597</u>	<u>16.5</u>	597	16.5	600	16.4	<u>463</u>	<u>21.3</u>	462	21.3	463	21.3
470.lbm	<u>517</u>	<u>26.6</u>	517	26.6	515	26.7	560	24.5	<u>558</u>	<u>24.6</u>	550	25.0
481.wrf	<u>521</u>	<u>21.4</u>	523	21.4	521	21.4	<u>521</u>	<u>21.4</u>	519	21.5	523	21.4
482.sphinx3	812	24.0	811	24.0	<u>811</u>	<u>24.0</u>	782	24.9	<u>781</u>	<u>24.9</u>	780	25.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=10800 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 22.3

Motherboard H8QI6-F, AMD Opteron 8435

SPECfp_base2006 = 18.4

CPU2006 license: 001176

Test date: Nov-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "450"

LD_LIBRARY_PATH = "/spec/amd0905is-libs/64:/spec/amd0905is-libs/32"

NCPUS = "24"

PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

System was tested in an open environment.

To ensure system stability, a 1000W (minimum) ATX power supply [8-pin & 8-pin (+12V) and 24-pin are required]

Product description can be obtained at:

<http://www.supermicro.com/Aplus/motherboard/Opteron8000/SR56x0/H8QI6-F.cfm>

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -Mnomain
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 22.3

Motherboard H8QI6-F, AMD Opteron 8435

SPECfp_base2006 = 18.4

CPU2006 license: 001176

Test date: Nov-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

Base Portability Flags (Continued)

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Bstatic_pgi

C++ benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed --zc_eh -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

Fortran benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Mvect=short -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

openCC

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 22.3

Motherboard H8QI6-F, AMD Opteron 8435

SPECfp_base2006 = 18.4

CPU2006 license: 001176

Test date: Nov-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

Peak Compiler Invocation (Continued)

444.namd: pgcpp

Fortran benchmarks (except as noted below):

openf95

410.bwaves: pgf95

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64
-Bstatic_pgi

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 22.3

Motherboard H8QI6-F, AMD Opteron 8435

SPECfp_base2006 = 18.4

CPU2006 license: 001176

Test date: Nov-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
 -Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc_eh
 -tp shanghai-64 -Bstatic_pgi

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
 -LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll_times_max=8
 -OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
 -GRA:unspill=on -CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
 -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
 -OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
 -CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
 -HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed
 -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
 -OPT:unroll_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0
 -Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast
 -Mipa=inline -tp shanghai-64 -Bstatic_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
 -Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
 -Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8
 -Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
 -LNO:prefetch_ahead=1 -CG:load_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
 -LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 22.3

Motherboard H8QI6-F, AMD Opteron 8435

SPECfp_base2006 = 18.4

CPU2006 license: 001176

Test date: Nov-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

Peak Optimization Flags (Continued)

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

436.cactusADM: -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre
-Mfprelaxed -tp shanghai-64 -Bstatic_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc=huge
-Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64
-Bstatic_pgi

Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -Mipa=jobs:4

434.zeusmp: -Mipa=jobs:4

437.leslie3d: -Mipa=jobs:4(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: -Mipa=jobs:4

454.calculix: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.html>

http://www.spec.org/cpu2006/flags/pgi80_linux_flags-revA.html

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.xml>

http://www.spec.org/cpu2006/flags/pgi80_linux_flags-revA.xml

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 22.3

Motherboard H8QI6-F, AMD Opteron 8435

SPECfp_base2006 = 18.4

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2009

Hardware Availability: Jun-2009

Software Availability: Apr-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:49:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 December 2009.