



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265
(Intel Xeon E5504, 2.00 GHz)

SPECint®_rate2006 = 136

SPECint_rate_base2006 = 127

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jan-2010

Hardware Availability: May-2009

Software Availability: Feb-2009

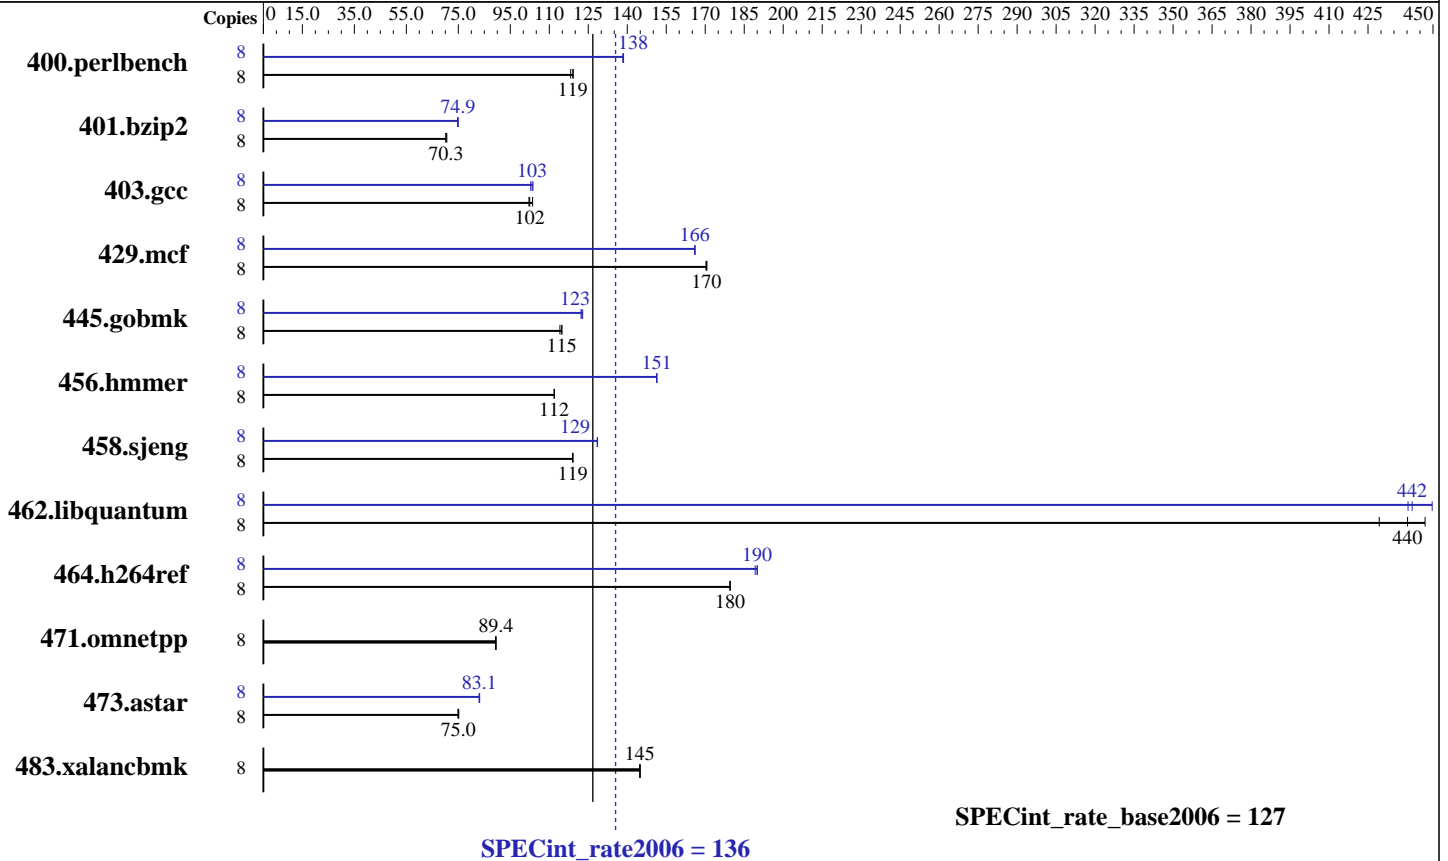

Hardware

CPU Name: Intel Xeon E5504
 CPU Characteristics:
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4 GB PC3-10600R, 2 Rank, running at 800 MHz)
 Disk Subsystem: 1 x 73 GB SAS, 10000 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265
(Intel Xeon E5504, 2.00 GHz)

SPECint_rate2006 = 136

SPECint_rate_base2006 = 127

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jan-2010
Hardware Availability: May-2009
Software Availability: Feb-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	661	118	<u>657</u>	<u>119</u>	656	119	8	<u>564</u>	<u>138</u>	564	139	565	138
401.bzip2	8	1094	70.6	<u>1098</u>	<u>70.3</u>	1100	70.2	8	1033	74.7	1030	74.9	<u>1031</u>	<u>74.9</u>
403.gcc	8	<u>628</u>	<u>102</u>	630	102	622	104	8	<u>623</u>	<u>103</u>	621	104	626	103
429.mcf	8	428	171	<u>428</u>	<u>170</u>	428	170	8	<u>439</u>	<u>166</u>	440	166	439	166
445.gobmk	8	<u>731</u>	<u>115</u>	736	114	731	115	8	683	123	<u>685</u>	<u>123</u>	687	122
456.hammer	8	667	112	<u>667</u>	<u>112</u>	667	112	8	<u>493</u>	<u>151</u>	493	151	493	151
458.sjeng	8	813	119	<u>813</u>	<u>119</u>	814	119	8	753	129	754	128	<u>753</u>	<u>129</u>
462.libquantum	8	371	447	386	429	<u>377</u>	<u>440</u>	8	376	440	369	450	<u>375</u>	<u>442</u>
464.h264ref	8	986	180	<u>986</u>	<u>180</u>	986	180	8	931	190	<u>932</u>	<u>190</u>	936	189
471.omnetpp	8	558	89.6	560	89.3	<u>559</u>	<u>89.4</u>	8	558	89.6	560	89.3	<u>559</u>	<u>89.4</u>
473.astar	8	750	74.8	747	75.2	<u>748</u>	<u>75.0</u>	8	<u>676</u>	<u>83.1</u>	675	83.2	676	83.0
483.xalancbmk	8	<u>381</u>	<u>145</u>	381	145	381	145	8	<u>381</u>	<u>145</u>	381	145	381	145

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265
(Intel Xeon E5504, 2.00 GHz)

SPECint_rate2006 = 136

SPECint_rate_base2006 = 127

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jan-2010
Hardware Availability: May-2009
Software Availability: Feb-2009

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3 -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

```
401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

C++ benchmarks (except as noted below):

icpc

```
473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc
```

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32  
401.bzip2: -DSPEC_CPU_LP64  
456.hmmer: -DSPEC_CPU_LP64  
458.sjeng: -DSPEC_CPU_LP64  
462.libquantum: -DSPEC_CPU_LINUX  
473.astar: -DSPEC_CPU_LP64  
483.xalancbmk: -DSPEC_CPU_LINUX
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 136

BL265
(Intel Xeon E5504, 2.00 GHz)

SPECint_rate_base2006 = 127

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jan-2010
Hardware Availability: May-2009
Software Availability: Feb-2009

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static
-opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap64

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265
(Intel Xeon E5504, 2.00 GHz)

SPECint_rate2006 = 136

SPECint_rate_base2006 = 127

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jan-2010
Hardware Availability: May-2009
Software Availability: Feb-2009

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20100202.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20100202.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 05:51:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 February 2010.