



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp®2006 = 48.9

PRIMERGY BX924 S2, Intel Xeon X5677, 3.46 GHz

SPECfp\_base2006 = 45.5

CPU2006 license: 19


Test date: Jun-2010

Test sponsor: Fujitsu

Hardware Availability: Jun-2010

Tested by: Fujitsu

Software Availability: Jan-2010

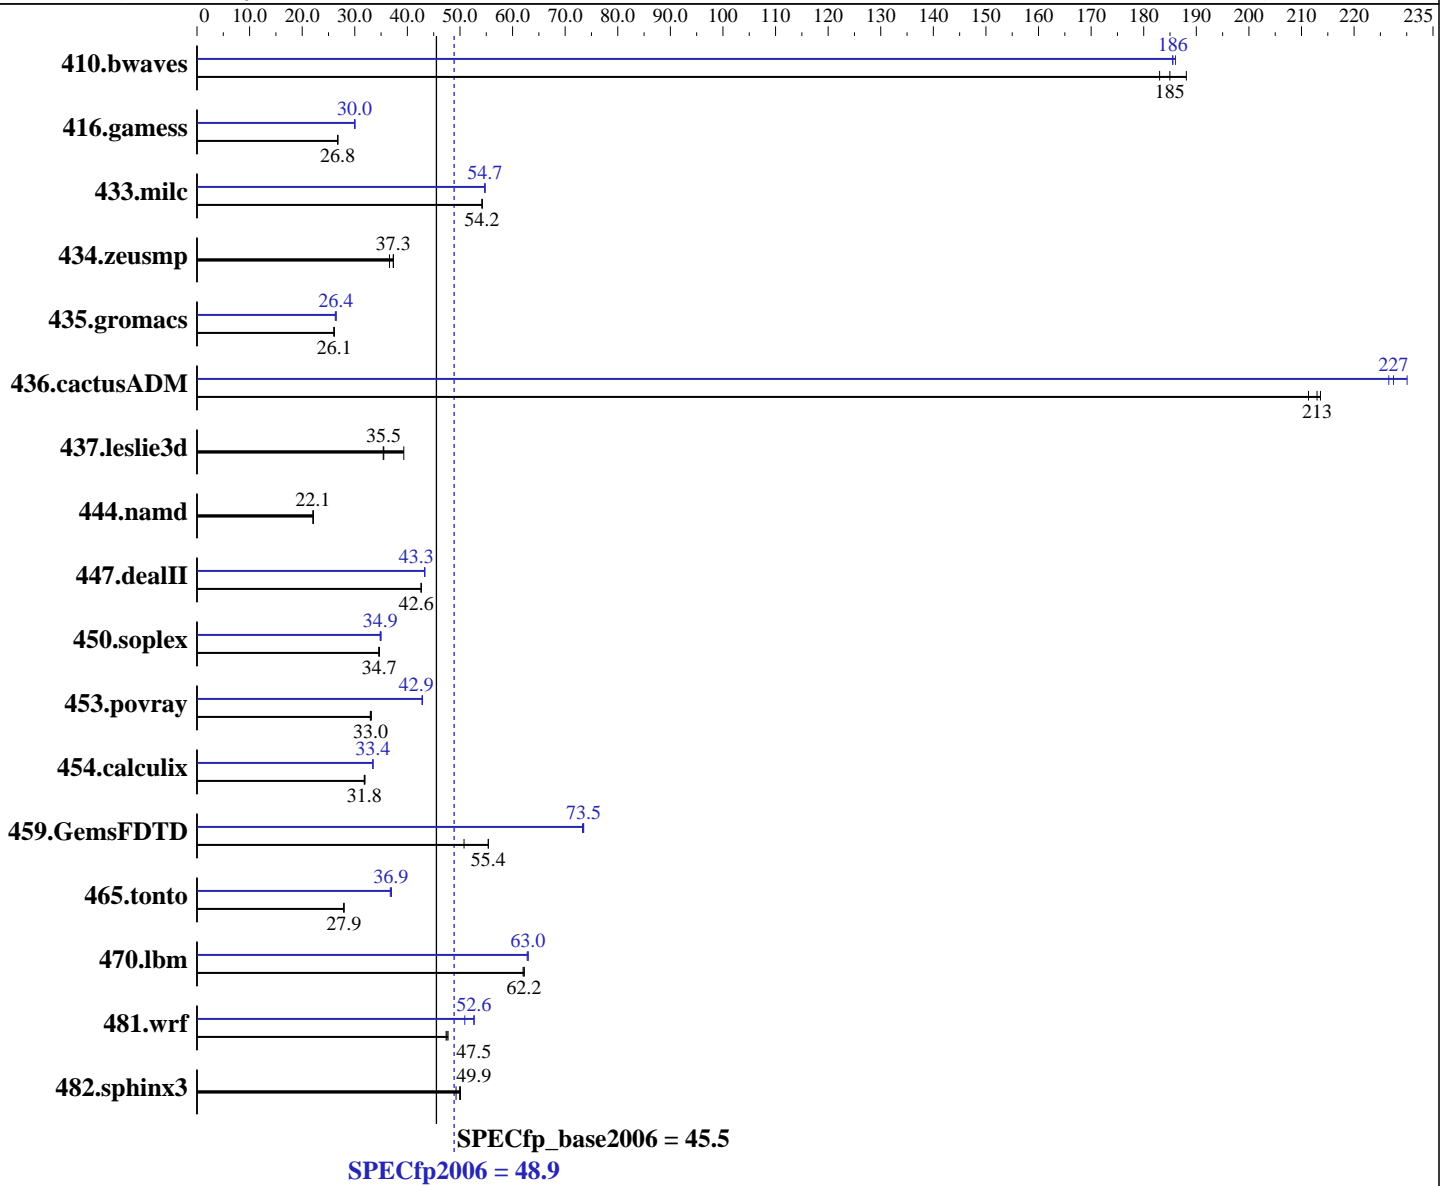

### Hardware

CPU Name: Intel Xeon X5677  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.73 GHz  
 CPU MHz: 3467  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Multi-User Run Level 3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp2006 = **48.9**

PRIMERGY BX924 S2, Intel Xeon X5677, 3.46 GHz

SPECfp\_base2006 = **45.5**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2010

Hardware Availability: Jun-2010

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC)  
Disk Subsystem: 1 x SAS, 300 GB, 10000 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	74.3	183	<b><u>73.5</u></b>	<b><u>185</u></b>	72.2	188	<b><u>73.0</u></b>	<b><u>186</u></b>	<b><u>73.3</u></b>	<b><u>186</u></b>	73.3	185
416.gamess	731	26.8	733	26.7	<b><u>732</u></b>	<b><u>26.8</u></b>	653	30.0	652	30.0	<b><u>653</u></b>	<b><u>30.0</u></b>
433.milc	169	54.2	<b><u>169</u></b>	<b><u>54.2</u></b>	169	54.2	168	54.8	<b><u>168</u></b>	<b><u>54.7</u></b>	168	54.7
434.zeusmp	244	37.3	249	36.6	<b><u>244</u></b>	<b><u>37.3</u></b>	244	37.3	249	36.6	<b><u>244</u></b>	<b><u>37.3</u></b>
435.gromacs	<b><u>274</u></b>	<b><u>26.1</u></b>	274	26.1	274	26.0	272	26.3	<b><u>270</u></b>	<b><u>26.4</u></b>	270	26.5
436.cactusADM	56.5	211	<b><u>56.1</u></b>	<b><u>213</u></b>	55.9	214	51.9	230	<b><u>52.5</u></b>	<b><u>227</u></b>	52.7	227
437.leslie3d	239	39.3	265	35.4	<b><u>265</u></b>	<b><u>35.5</u></b>	239	39.3	265	35.4	<b><u>265</u></b>	<b><u>35.5</u></b>
444.namd	363	22.1	<b><u>363</u></b>	<b><u>22.1</u></b>	363	22.1	363	22.1	<b><u>363</u></b>	<b><u>22.1</u></b>	363	22.1
447.dealII	268	42.6	<b><u>268</u></b>	<b><u>42.6</u></b>	268	42.6	264	43.3	264	43.3	<b><u>264</u></b>	<b><u>43.3</u></b>
450.soplex	<b><u>241</u></b>	<b><u>34.7</u></b>	240	34.7	241	34.5	238	35.0	<b><u>239</u></b>	<b><u>34.9</u></b>	239	34.8
453.povray	161	33.0	<b><u>161</u></b>	<b><u>33.0</u></b>	160	33.2	<b><u>124</u></b>	<b><u>42.9</u></b>	124	42.8	124	42.9
454.calculix	<b><u>259</u></b>	<b><u>31.8</u></b>	258	31.9	259	31.8	247	33.5	<b><u>247</u></b>	<b><u>33.4</u></b>	247	33.4
459.GemsFDTD	192	55.4	<b><u>192</u></b>	<b><u>55.4</u></b>	209	50.8	145	73.3	<b><u>144</u></b>	<b><u>73.5</u></b>	144	73.5
465.tonto	<b><u>352</u></b>	<b><u>27.9</u></b>	352	27.9	352	27.9	<b><u>267</u></b>	<b><u>36.9</u></b>	266	37.0	268	36.7
470.lbm	<b><u>221</u></b>	<b><u>62.2</u></b>	222	62.0	221	62.2	<b><u>218</u></b>	<b><u>63.0</u></b>	218	63.0	219	62.8
481.wrf	<b><u>235</u></b>	<b><u>47.5</u></b>	234	47.7	236	47.4	212	52.7	<b><u>212</u></b>	<b><u>52.6</u></b>	219	50.9
482.sphinx3	389	50.1	<b><u>390</u></b>	<b><u>49.9</u></b>	396	49.3	389	50.1	<b><u>390</u></b>	<b><u>49.9</u></b>	396	49.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS configuration:  
Data Reuse Optimization = Disable  
Performance/Power Setting = Traditional

## General Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter  
KMP\_STACKSIZE set to 200M

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 48.9**

PRIMERGY BX924 S2, Intel Xeon X5677, 3.46 GHz

**SPECfp\_base2006 = 45.5**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Jun-2010  
**Hardware Availability:** Jun-2010  
**Software Availability:** Jan-2010

## General Notes (Continued)

For information about Fujitsu please visit: <http://www.fujitsu.com>  
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 48.9**

PRIMERGY BX924 S2, Intel Xeon X5677, 3.46 GHz

**SPECfp\_base2006 = 45.5**

CPU2006 license: 19

Test date: Jun-2010

Test sponsor: Fujitsu

Hardware Availability: Jun-2010

Tested by: Fujitsu

Software Availability: Jan-2010

## Base Optimization Flags (Continued)

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-ansi-alias`

470.lbm: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-parallel -ansi-alias -auto-ilp32`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `basepeak = yes`

447.dealIII: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep- -auto-ilp32`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 48.9

PRIMERGY BX924 S2, Intel Xeon X5677, 3.46 GHz

SPECfp\_base2006 = 45.5

CPU2006 license: 19

Test date: Jun-2010

Test sponsor: Fujitsu

Hardware Availability: Jun-2010

Tested by: Fujitsu

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 48.9

PRIMERGY BX924 S2, Intel Xeon X5677, 3.46 GHz

SPECfp\_base2006 = 45.5

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2010

Hardware Availability: Jun-2010

Software Availability: Jan-2010

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 11:35:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 20 July 2010.