



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®2006 = 32.0

IBM System x3690 X5 (Intel Xeon X7542)

SPECint_base2006 = 28.9

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2010

Hardware Availability: Aug-2010

Software Availability: Jan-2010

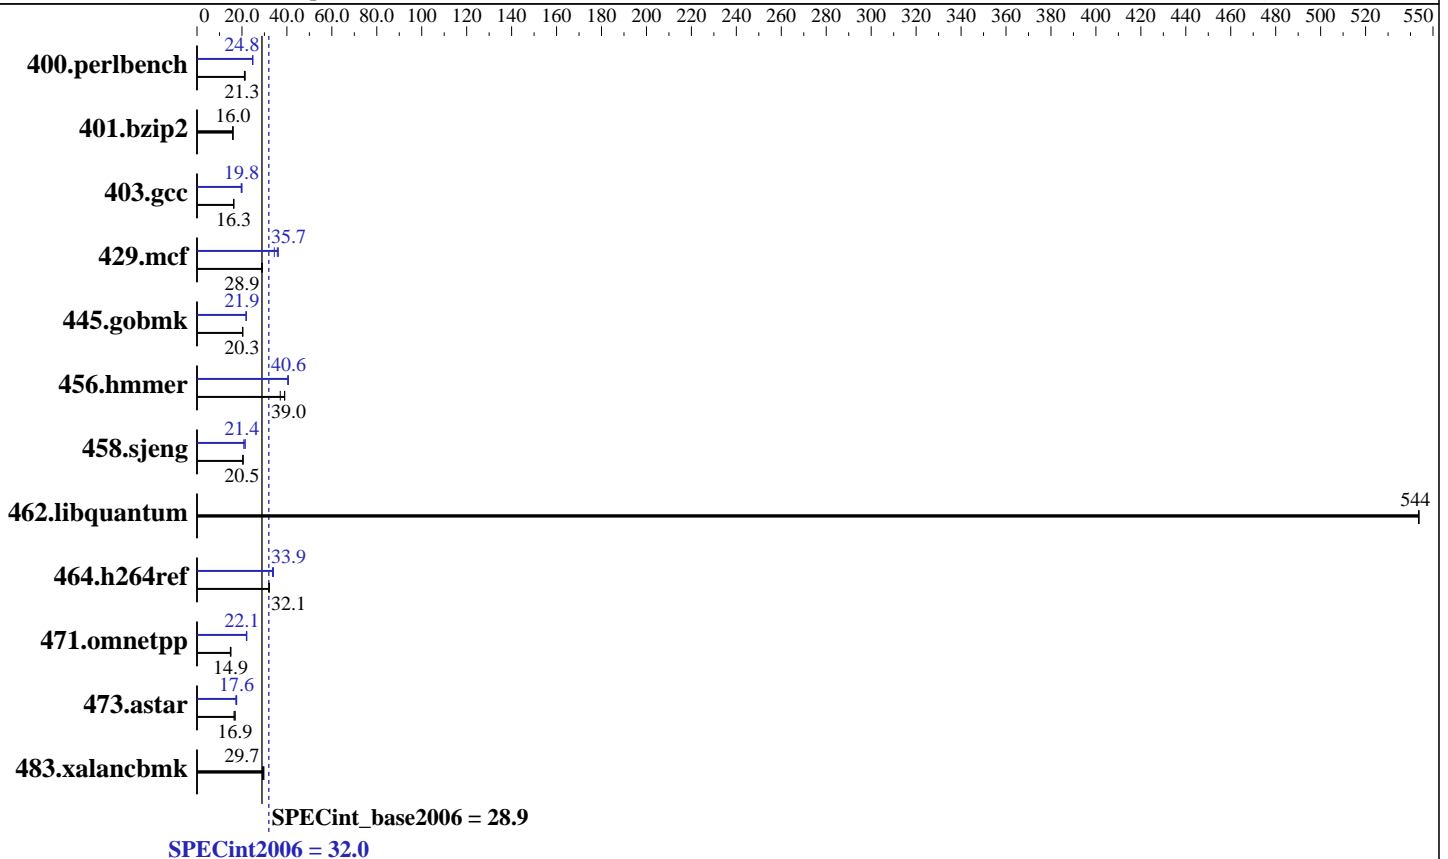

Hardware

CPU Name: Intel Xeon X7542
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 18 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (32 x 4 GB PC3-8500R CL7, Quad Rank, running at 978 MHz)
 Disk Subsystem: 1 x 146 GB SAS, 15000 RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1
 Build 20091130 Package ID: l_cproc_p_11.1.064
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 32.0

IBM System x3690 X5 (Intel Xeon X7542)

SPECint_base2006 = 28.9

CPU2006 license: 11

Test date: Jun-2010

Test sponsor: IBM Corporation

Hardware Availability: Aug-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	463	21.1	459	21.3	456	21.4	393	24.8	394	24.8	395	24.7
401.bzip2	602	16.0	607	15.9	604	16.0	602	16.0	607	15.9	604	16.0
403.gcc	493	16.3	493	16.3	492	16.4	406	19.8	409	19.7	402	20.0
429.mcf	315	28.9	317	28.8	314	29.1	252	36.2	265	34.4	255	35.7
445.gobmk	517	20.3	515	20.4	516	20.3	479	21.9	479	21.9	479	21.9
456.hammer	252	37.0	239	39.0	239	39.0	230	40.6	231	40.4	230	40.6
458.sjeng	591	20.5	593	20.4	592	20.5	566	21.4	566	21.4	581	20.8
462.libquantum	38.1	544	38.1	544	38.1	544	38.1	544	38.1	544	38.1	544
464.h264ref	693	32.0	690	32.1	688	32.2	658	33.6	652	33.9	652	34.0
471.omnetpp	421	14.8	418	14.9	414	15.1	282	22.2	284	22.0	283	22.1
473.astar	426	16.5	415	16.9	415	16.9	406	17.3	398	17.6	398	17.6
483.xalancbmk	236	29.2	232	29.7	232	29.7	236	29.2	232	29.7	232	29.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

Turbo Boost set to Traditional

General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 32.0

IBM System x3690 X5 (Intel Xeon X7542)

SPECint_base2006 = 28.9

CPU2006 license: 11

Test date: Jun-2010

Test sponsor: IBM Corporation

Hardware Availability: Aug-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Base Portability Flags (Continued)

429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 471.omnetpp: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 32.0

IBM System x3690 X5 (Intel Xeon X7542)

SPECint_base2006 = 28.9

CPU2006 license: 11

Test date: Jun-2010

Test sponsor: IBM Corporation

Hardware Availability: Aug-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: basepeak = yes

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
         -opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
          -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
          -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
          -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
            -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 32.0

IBM System x3690 X5 (Intel Xeon X7542)

SPECint_base2006 = 28.9

CPU2006 license: 11

Test date: Jun-2010

Test sponsor: IBM Corporation

Hardware Availability: Aug-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
           -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100603.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100603.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 11:43:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 August 2010.