



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp[®]2006 = **38.4**

Sun Fire X4270 M2 (Intel Xeon L5640 2.27 GHz)

SPECfp_base2006 = **35.7**

CPU2006 license: 6


Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Sep-2010

Hardware Availability: Jun-2010

Software Availability: Apr-2010

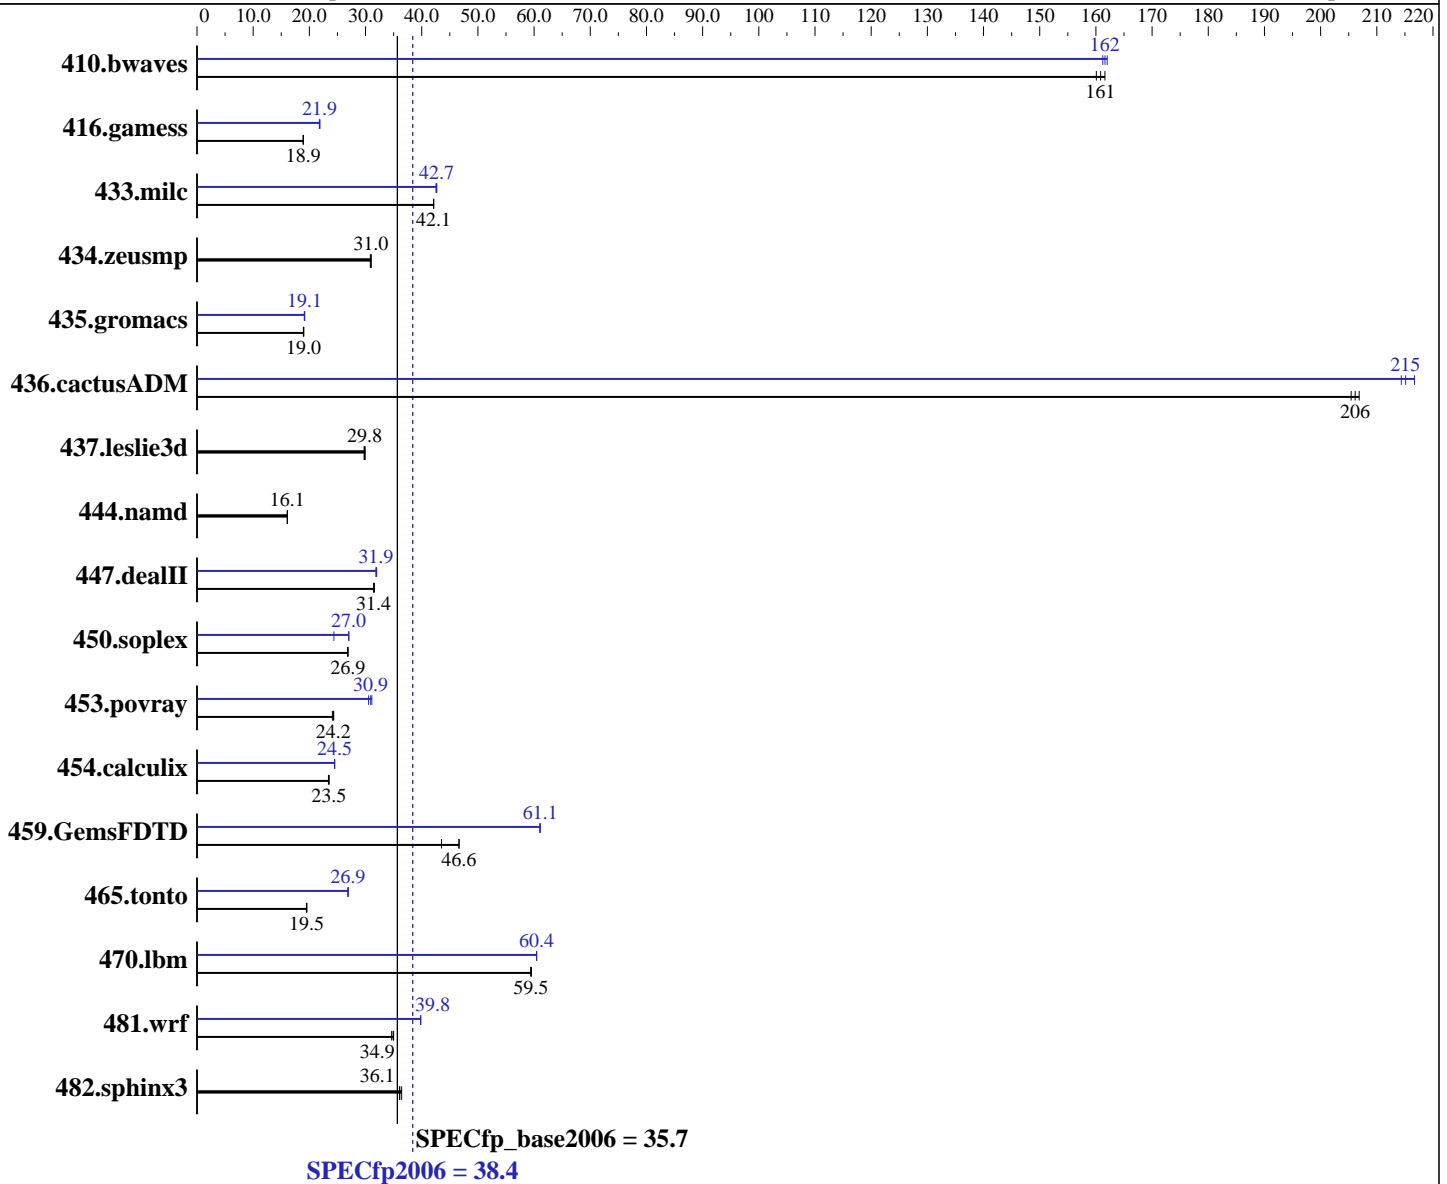

Hardware

CPU Name: Intel Xeon L5640
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2267
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1 or 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Oracle Enterprise Linux Server release 5.5 kernel 2.6.18-194.el5
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp2006 = **38.4**

Sun Fire X4270 M2 (Intel Xeon L5640 2.27 GHz)

SPECfp_base2006 = **35.7**

CPU2006 license: 6

Test date: Sep-2010

Test sponsor: Oracle Corporation

Hardware Availability: Jun-2010

Tested by: Oracle Corporation

Software Availability: Apr-2010

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 146 GB SAS, 10000 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	84.9	160	84.5	161	84.1	162	83.9	162	84.1	162	84.3	161
416.gamess	1035	18.9	1035	18.9	1036	18.9	896	21.9	896	21.9	899	21.8
433.milc	218	42.1	218	42.1	218	42.1	216	42.5	215	42.7	215	42.7
434.zeusmp	294	31.0	295	30.9	294	31.0	294	31.0	295	30.9	294	31.0
435.gromacs	376	19.0	377	18.9	376	19.0	372	19.2	373	19.1	374	19.1
436.cactusADM	58.0	206	57.8	207	58.2	205	55.7	214	55.5	215	55.1	217
437.leslie3d	316	29.7	315	29.8	314	29.9	316	29.7	315	29.8	314	29.9
444.namd	499	16.1	499	16.1	498	16.1	499	16.1	499	16.1	498	16.1
447.dealII	364	31.4	364	31.4	362	31.6	358	32.0	359	31.9	359	31.9
450.soplex	310	26.9	310	26.9	311	26.8	308	27.0	309	27.0	342	24.4
453.povray	221	24.1	219	24.2	219	24.3	174	30.5	171	31.1	172	30.9
454.calculix	353	23.4	351	23.5	351	23.5	337	24.5	337	24.5	337	24.5
459.GemsFDTD	228	46.6	244	43.5	227	46.7	174	61.1	174	61.0	174	61.1
465.tonto	505	19.5	503	19.6	504	19.5	366	26.9	366	26.9	366	26.9
470.lbm	231	59.5	231	59.4	231	59.5	227	60.4	227	60.4	227	60.5
481.wrf	322	34.6	320	34.9	319	35.0	280	39.8	281	39.8	281	39.8
482.sphinx3	540	36.1	540	36.1	535	36.4	540	36.1	540	36.1	535	36.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M
```

Platform Notes

Load Default BIOS Settings and then change the following
Data Reuse Optimization Disabled
Hardware Prefetch Enabled
Adjacent Cache Line Prefetch Enabled
L1 Data Prefetch Enabled



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp2006 = 38.4

Sun Fire X4270 M2 (Intel Xeon L5640 2.27 GHz)

SPECfp_base2006 = 35.7

CPU2006 license: 6

Test date: Sep-2010

Test sponsor: Oracle Corporation

Hardware Availability: Jun-2010

Tested by: Oracle Corporation

Software Availability: Apr-2010

General Notes

This result is measured on a Sun Fire X4170 M2 server. The Sun Fire X4170 M2 and the Sun Fire X4270 M2 are electronically equivalent.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp2006 = 38.4

Sun Fire X4270 M2 (Intel Xeon L5640 2.27 GHz)

SPECfp_base2006 = 35.7

CPU2006 license: 6

Test date: Sep-2010

Test sponsor: Oracle Corporation

Hardware Availability: Jun-2010

Tested by: Oracle Corporation

Software Availability: Apr-2010

Base Optimization Flags (Continued)

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-ansi-alias`

470.lbm: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-parallel -ansi-alias -auto-ilp32`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `basepeak = yes`

447.dealIII: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep- -auto-ilp32`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp2006 = 38.4

Sun Fire X4270 M2 (Intel Xeon L5640 2.27 GHz)

SPECfp_base2006 = 35.7

CPU2006 license: 6

Test date: Sep-2010

Test sponsor: Oracle Corporation

Hardware Availability: Jun-2010

Tested by: Oracle Corporation

Software Availability: Apr-2010

Peak Optimization Flags (Continued)

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE-pathfix-smartheap.20101027.html>

http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.20101027.html



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp2006 = 38.4

Sun Fire X4270 M2 (Intel Xeon L5640 2.27 GHz)

SPECfp_base2006 = 35.7

CPU2006 license: 6

Test date: Sep-2010

Test sponsor: Oracle Corporation

Hardware Availability: Jun-2010

Tested by: Oracle Corporation

Software Availability: Apr-2010

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE-pathfix-smartheap.20101027.xml>

http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.20101027.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 14:14:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 October 2010.