



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp<sup>®</sup>2006 = 86.4

BL275+ (Intel Xeon E5-2670, 2.60 GHz)

SPECfp\_base2006 = 81.8

CPU2006 license: 20


Test date: Oct-2012

Test sponsor: Bull SAS

Hardware Availability: Jul-2012

Tested by: Bull SAS

Software Availability: Dec-2011

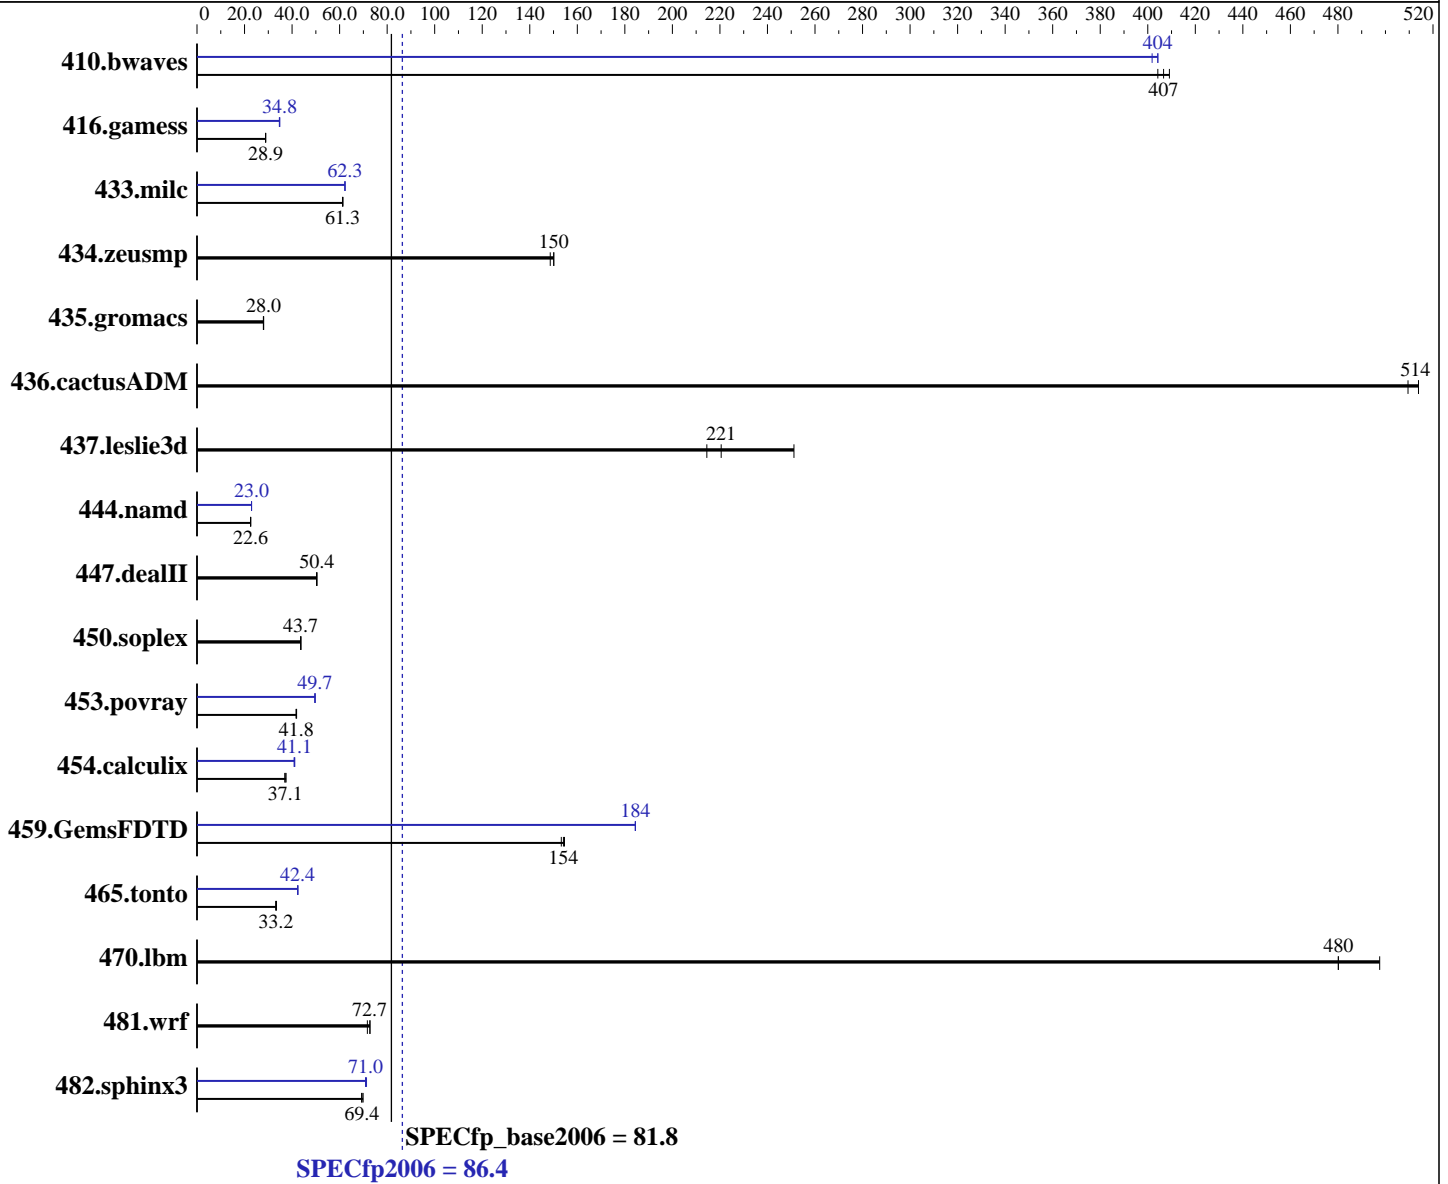

**Hardware**

CPU Name: Intel Xeon E5-2670  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

**Software**

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp2006 = **86.4**

BL275+ (Intel Xeon E5-2670, 2.60 GHz)

SPECfp\_base2006 = **81.8**

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Oct-2012

Hardware Availability: Jul-2012

Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 2 x 146 GB 15000 RPM SAS, RAID 0  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	33.6	404	<b>33.4</b>	<b>407</b>	33.2	409	33.8	402	<b>33.6</b>	<b>404</b>	33.6	404
416.gamess	<b>678</b>	<b>28.9</b>	678	28.9	678	28.9	<b>563</b>	<b>34.8</b>	565	34.6	563	34.8
433.milc	149	61.4	<b>150</b>	<b>61.3</b>	150	61.2	<b>147</b>	<b>62.3</b>	147	62.2	147	62.3
434.zeusmp	<b>60.6</b>	<b>150</b>	60.6	150	61.2	149	<b>60.6</b>	<b>150</b>	60.6	150	61.2	149
435.gromacs	256	27.9	255	28.1	<b>255</b>	<b>28.0</b>	256	27.9	255	28.1	<b>255</b>	<b>28.0</b>
436.cactusADM	23.3	514	23.5	509	<b>23.3</b>	<b>514</b>	23.3	514	23.5	509	<b>23.3</b>	<b>514</b>
437.leslie3d	37.4	251	43.8	214	<b>42.6</b>	<b>221</b>	37.4	251	43.8	214	<b>42.6</b>	<b>221</b>
444.namd	<b>355</b>	<b>22.6</b>	355	22.6	355	22.6	350	22.9	<b>349</b>	<b>23.0</b>	349	23.0
447.dealII	<b>227</b>	<b>50.4</b>	227	50.4	227	50.3	<b>227</b>	<b>50.4</b>	227	50.4	227	50.3
450.soplex	191	43.6	191	43.7	<b>191</b>	<b>43.7</b>	191	43.6	191	43.7	<b>191</b>	<b>43.7</b>
453.povray	128	41.7	<b>127</b>	<b>41.8</b>	127	41.9	107	49.7	107	49.5	<b>107</b>	<b>49.7</b>
454.calculix	220	37.5	223	36.9	<b>222</b>	<b>37.1</b>	<b>201</b>	<b>41.1</b>	202	40.8	201	41.1
459.GemsFDTD	<b>68.8</b>	<b>154</b>	69.2	153	68.6	155	57.5	184	<b>57.5</b>	<b>184</b>	57.5	184
465.tonto	294	33.5	<b>296</b>	<b>33.2</b>	297	33.1	232	42.5	<b>232</b>	<b>42.4</b>	232	42.3
470.lbm	<b>28.6</b>	<b>480</b>	27.6	498	28.6	480	<b>28.6</b>	<b>480</b>	27.6	498	28.6	480
481.wrf	153	72.8	156	71.7	<b>154</b>	<b>72.7</b>	153	72.8	156	71.7	<b>154</b>	<b>72.7</b>
482.sphinx3	281	69.2	<b>281</b>	<b>69.4</b>	279	69.9	275	70.9	<b>274</b>	<b>71.0</b>	273	71.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /spec/cpu2006.1.2/config/sysinfo.rev6800  
 \$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
 running on localhost.localdomain Fri Oct 19 16:20:48 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
 model name : Intel(R) Xeon(R) CPU E5-2670 0 @ 2.60GHz  
 Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

**SPECfp2006 = 86.4**

**BL275+ (Intel Xeon E5-2670, 2.60 GHz)**

**SPECfp\_base2006 = 81.8**

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Bull SAS

**Test date:** Oct-2012  
**Hardware Availability:** Jul-2012  
**Software Availability:** Dec-2011

### Platform Notes (Continued)

```
2 "physical id"s (chips)
16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 8
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      132273780 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsc_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 19 16:20
```

```
SPEC is set to: /spec/cpu2006.1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_root
ext4            172G    77G   86G  48% /
```

```
Additional information from dmidecode:
Memory:
16x Samsung M392B1K70DM0-CK0 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact,0,1"  
LD\_LIBRARY\_PATH = "/spec/cpu2006.1.2/libs/32:/spec/cpu2006.1.2/libs/64"  
OMP\_NUM\_THREADS = "16"  
Intel HT Technology = Disable  
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RHEL5.5  
Transparent Huge Pages enabled with:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECfp2006 = 86.4**

**BL275+ (Intel Xeon E5-2670, 2.60 GHz)**

**SPECfp\_base2006 = 81.8**

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Bull SAS

**Test date:** Oct-2012  
**Hardware Availability:** Jul-2012  
**Software Availability:** Dec-2011

## General Notes (Continued)

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECfp2006 = 86.4**

**BL275+ (Intel Xeon E5-2670, 2.60 GHz)**

**SPECfp\_base2006 = 81.8**

**CPU2006 license:** 20

**Test date:** Oct-2012

**Test sponsor:** Bull SAS

**Hardware Availability:** Jul-2012

**Tested by:** Bull SAS

**Software Availability:** Dec-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel`

C++ benchmarks:

444.namd: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECfp2006 = 86.4**

**BL275+ (Intel Xeon E5-2670, 2.60 GHz)**

**SPECfp\_base2006 = 81.8**

**CPU2006 license:** 20

**Test date:** Oct-2012

**Test sponsor:** Bull SAS

**Hardware Availability:** Jul-2012

**Tested by:** Bull SAS

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

447.deallI: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Bull-Platform-Settings-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Bull-Platform-Settings-V1.2.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECfp2006 = 86.4**

**BL275+ (Intel Xeon E5-2670, 2.60 GHz)**

**SPECfp\_base2006 = 81.8**

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Bull SAS

**Test date:** Oct-2012  
**Hardware Availability:** Jul-2012  
**Software Availability:** Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 14:08:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 20 November 2012.