SPEC® CINT2006 Result
Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 200 X5 (Intel Xeon E5-2620 v2, 2.10 GHz)

$SPECint^®\_rate2006 =$ 431

$SPECint\_rate\_base2006 =$ 414
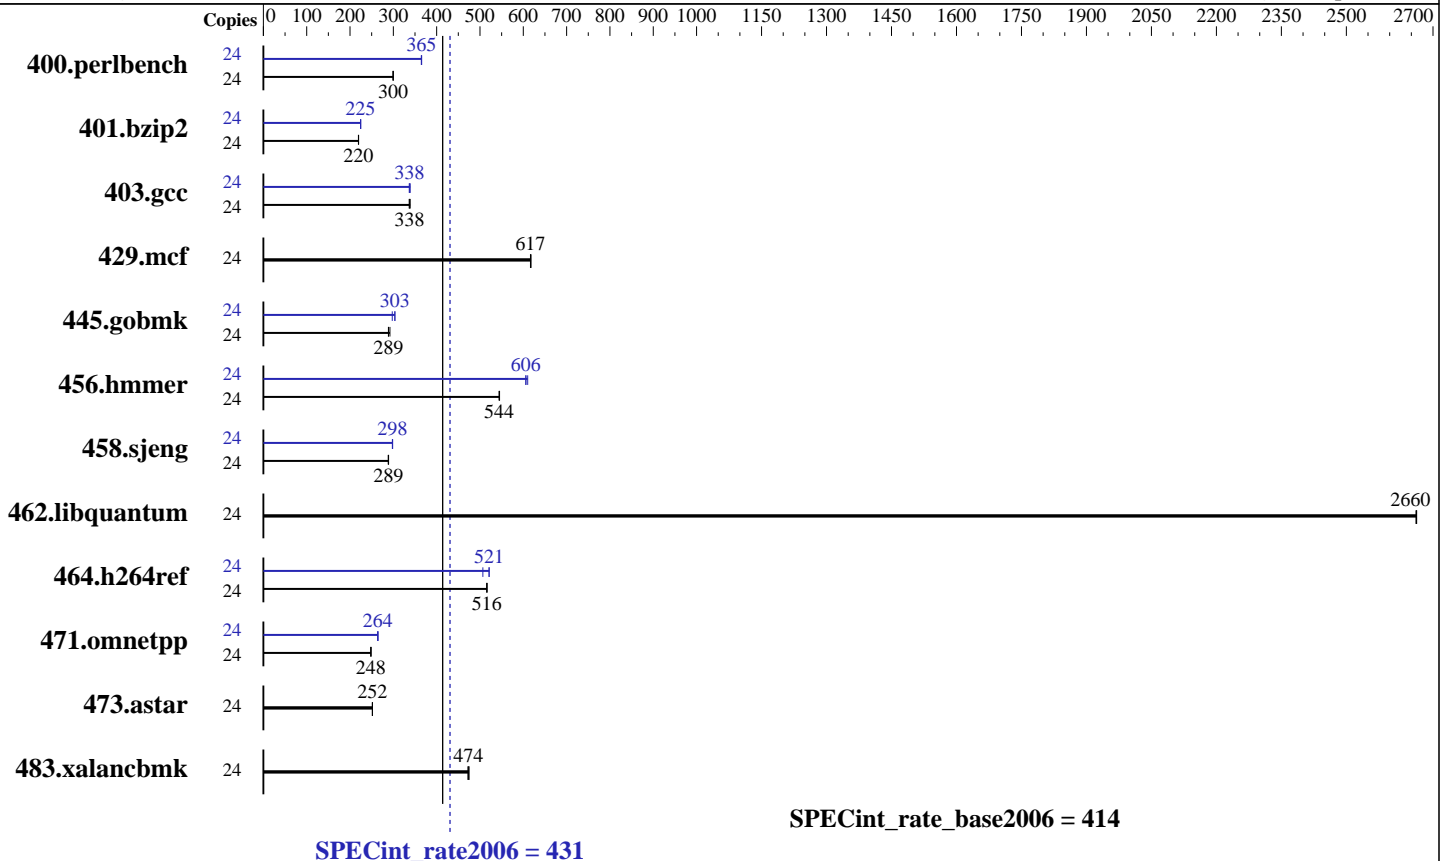
CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Dec-2013

Hardware Availability: Oct-2013

Software Availability: Sep-2013

SPECint_rate_base2006 = 414

SPECint_rate2006 = 431

Hardware

CPU Name: Intel Xeon E5-2620 v2
CPU Characteristics: Intel Turbo Boost Technology up to 2.60 GHz
CPU MHz: 2100
FPU: Integrated
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz and CL11)
Disk Subsystem: 1 x 240 GB SATA II SSD
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
2.6.32-358.11.1.el6.x86_64
Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel: No
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.0

SPEC CINT2006 Result
Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 200 X5 (Intel Xeon E5-2620 v2, 2.10 GHz)

SPECint_rate2006 = 431

SPECint_rate_base2006 = 414

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Dec-2013
Hardware Availability: Oct-2013
Software Availability: Sep-2013

Results Table

Benchmark	Base Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Peak Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	**783**	**300**	783	299	782	300	24	643	365	642	365	**642**	**365**
401.bzip2	24	1053	220	**1055**	**220**	1056	219	24	**1031**	**225**	1031	225	1032	224
403.gcc	24	**572**	**338**	570	339	574	337	24	570	339	574	337	**572**	**338**
429.mcf	24	355	617	**355**	**617**	354	618	24	355	617	**355**	**617**	354	618
445.gobmk	24	**872**	**289**	872	289	862	292	24	846	298	829	304	**830**	**303**
456.hmmer	24	411	544	**411**	**544**	411	545	24	367	610	**369**	**606**	370	606
458.sjeng	24	1005	289	**1007**	**289**	1007	288	24	973	298	975	298	**974**	**298**
462.libquantum	24	187	2660	187	2660	**187**	**2660**	24	187	2660	187	2660	**187**	**2660**
464.h264ref	24	**1029**	**516**	1029	516	1030	516	24	**1020**	**521**	1019	521	1048	507
471.omnetpp	24	605	248	**604**	**248**	604	248	24	**568**	**264**	567	264	569	264
473.astar	24	670	251	**669**	**252**	669	252	24	670	251	**669**	**252**	669	252
483.xalancbmk	24	349	475	351	472	**350**	**474**	24	349	475	351	472	**350**	**474**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

```
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Sun Dec 29 04:56:51 2013

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2620 v2 @ 2.10GHz
      2 "physical id"s (chips)
      24 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 6
      siblings  : 12
```

ACTION S.A.

ACTINA SOLAR 200 X5 (Intel Xeon E5-2620 v2, 2.10 GHz)

SPECint_rate2006 =   431

SPECint_rate_base2006 = 414

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Dec-2013

Hardware Availability: Oct-2013

Software Availability: Sep-2013

Platform Notes (Continued)

```
     physical 0: cores 0 1 2 3 4 5
     physical 1: cores 0 1 2 3 4 5
   cache size : 15360 KB

 From /proc/meminfo
    MemTotal:       264500920 kB
    HugePages_Total:        0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    Red Hat Enterprise Linux Server release 6.4 (Santiago)

 From /etc/*release* /etc/*version*
    redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
    system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

 uname -a:
    Linux localhost.localdomain 2.6.32-358.11.1.el6.x86_64 #1 SMP Tue Nov 19
    17:43:04 CET 2013 x86_64 x86_64 x86_64 GNU/Linux

 run-level 3 Dec 23 14:54

 SPEC is set to: /cpu2006.1.2
    Filesystem     Type    Size  Used Avail Use% Mounted on
    /dev/sda1      ext4    193G   65G  118G  36% /

 Additional information from dmidecode:
   BIOS American Megatrends Inc. 3.0a 07/31/2013
   Memory:
   16x   16 GB
   16x Hynix Semiconducto HMT42GR7AFR4C 16 GB 1600 MHz 1 rank

 (End of data from sysinfo program)
dmidecode does not properly display memory modules,
16 modules of 16 GB were used to run the test (256 GB total)
Due to BIOS issue memory rank is improperly displayed -
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>        /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
 Binaries compiled on a system with 2x Xeon E5-2650 v2 chips
 + 256 GB memory using RedHat EL 6.4
```

SPEC CINT2006 Result

ACTION S.A.

ACTINA SOLAR 200 X5 (Intel Xeon E5-2620 v2, 2.10 GHz)

SPECint_rate2006 =   431

SPECint_rate_base2006 = 414

Base Compiler Invocation

C benchmarks:
    icc -m32

C++ benchmarks:
    icpc -m32

Base Portability Flags

    400.perlbench: -DSPEC_CPU_LINUX_IA32
    462.libquantum: -DSPEC_CPU_LINUX
    483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
    -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
    -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
    -Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmartheap

Base Other Flags

C benchmarks:

    403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
    icc -m32

    400.perlbench: icc -m64

    401.bzip2: icc -m64

    456.hmmer: icc -m64

    458.sjeng: icc -m64

C++ benchmarks:
    icpc -m32

SPEC CINT2006 Result

ACTION S.A.

ACTINA SOLAR 200 X5 (Intel Xeon E5-2620 v2, 2.10 GHz)

SPECint_rate2006 =   431

SPECint_rate_base2006 = 414

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Dec-2013
Hardware Availability: Oct-2013
Software Availability: Sep-2013

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
     401.bzip2: -DSPEC_CPU_LP64
    456.hmmer: -DSPEC_CPU_LP64
     458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -auto-ilp32

    401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-prefetch -auto-ilp32 -ansi-alias

      403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

      429.mcf: basepeak = yes

    445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
               -ansi-alias -opt-mem-layout-trans=3

    456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

     458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -unroll4 -auto-ilp32

 462.libquantum: basepeak = yes

   464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -unroll2 -ansi-alias
```

C++ benchmarks:

```
   471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
               -L/cpu2006.1.2/sh -lsmartheap

     473.astar: basepeak = yes
```

Continued on next page

ACTION S.A.

ACTINA SOLAR 200 X5 (Intel Xeon E5-2620 v2, 2.10 GHz)

SPECint_rate2006 =   431

SPECint_rate_base2006 = 414

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Dec-2013
Hardware Availability: Oct-2013
Software Availability: Sep-2013

Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 19:49:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 February 2014.