



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation


IBM System x3650 M4
(Intel Xeon E5-2690 v2, 3.00 GHz)

SPECint®2006 = **62.1**

SPECint_base2006 = **57.7**

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: May-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

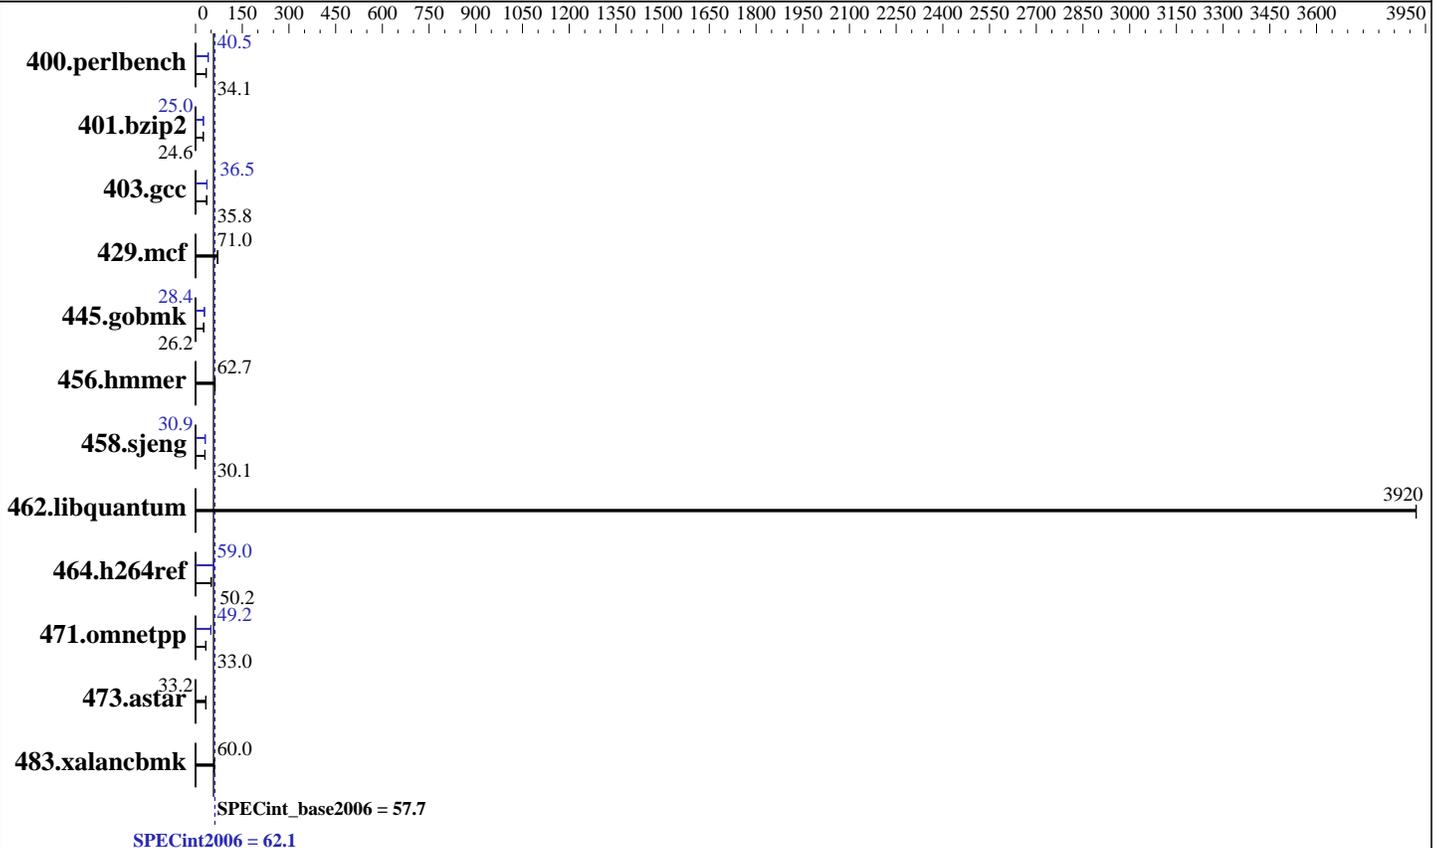

Hardware

CPU Name: Intel Xeon E5-2690 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)
 Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4
(Intel Xeon E5-2690 v2, 3.00 GHz)

SPECint2006 = **62.1**

SPECint_base2006 = **57.7**

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: May-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|----------------|--------------------|--------------------|-------------------|--------------------|-------------------|--------------------|--------------------|--------------------|-------------------|--------------------|-------------------|--------------------|
| | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | <u>287</u> | <u>34.1</u> | 287 | 34.1 | 287 | 34.1 | <u>241</u> | <u>40.5</u> | 241 | 40.5 | 241 | 40.6 |
| 401.bzip2 | <u>392</u> | <u>24.6</u> | 390 | 24.7 | 392 | 24.6 | 385 | 25.1 | 386 | 25.0 | <u>386</u> | <u>25.0</u> |
| 403.gcc | 225 | 35.7 | <u>225</u> | <u>35.8</u> | 225 | 35.8 | 221 | 36.5 | 221 | 36.5 | <u>221</u> | <u>36.5</u> |
| 429.mcf | <u>128</u> | <u>71.0</u> | 130 | 70.2 | 128 | 71.4 | <u>128</u> | <u>71.0</u> | 130 | 70.2 | 128 | 71.4 |
| 445.gobmk | 401 | 26.2 | <u>401</u> | <u>26.2</u> | 401 | 26.2 | 369 | 28.4 | <u>369</u> | <u>28.4</u> | 369 | 28.4 |
| 456.hammer | 149 | 62.7 | <u>149</u> | <u>62.7</u> | 150 | 62.3 | 149 | 62.7 | <u>149</u> | <u>62.7</u> | 150 | 62.3 |
| 458.sjeng | <u>402</u> | <u>30.1</u> | 402 | 30.1 | 402 | 30.1 | 391 | 30.9 | 392 | 30.9 | <u>391</u> | <u>30.9</u> |
| 462.libquantum | <u>5.29</u> | <u>3920</u> | 5.29 | 3920 | 5.29 | 3920 | <u>5.29</u> | <u>3920</u> | 5.29 | 3920 | 5.29 | 3920 |
| 464.h264ref | 440 | 50.3 | <u>441</u> | <u>50.2</u> | 441 | 50.2 | 374 | 59.1 | 375 | 59.0 | <u>375</u> | <u>59.0</u> |
| 471.omnetpp | <u>189</u> | <u>33.0</u> | 189 | 33.1 | 190 | 32.9 | 127 | 49.0 | <u>127</u> | <u>49.2</u> | 127 | 49.4 |
| 473.astar | 211 | 33.2 | <u>211</u> | <u>33.2</u> | 214 | 32.8 | 211 | 33.2 | <u>211</u> | <u>33.2</u> | 214 | 32.8 |
| 483.xalancbmk | 115 | 60.1 | 116 | 59.7 | <u>115</u> | <u>60.0</u> | 115 | 60.1 | 116 | 59.7 | <u>115</u> | <u>60.0</u> |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode
Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:
intel_idle.max_cstate=0

Platform Notes

BIOS setting:
Operating Mode set to Maximum Performance
Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on x3650M4 Sun May 18 15:27:05 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2690 v2 @ 3.00GHz
2 "physical id"s (chips)
40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4
(Intel Xeon E5-2690 v2, 3.00 GHz)

SPECint2006 = 62.1

SPECint_base2006 = 57.7

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: May-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 10
siblings  : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      264339612 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux x3650M4 2.6.32-358.18.1.el6.x86_64 #1 SMP Fri Aug 2 17:04:38 EDT 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 16 11:21
```

```
SPEC is set to: /home/SPECcpu-20140116-ic14.0
Filesystem      Type      Size Used Avail Use% Mounted on
/dev/mapper/vg_x3650m4-lv_home
                ext4      313G 114G 184G  39% /home
```

```
Additional information from dmidecode:
BIOS IBM  -[VVE135VUS-1.60]- 12/05/2013
Memory:
 8x Not Specified Not Specified
16x Samsung M393B2G70QH0-CMA 16 GB 1867 MHz 2 rank
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/SPECcpu-20140116-ic14.0/libs/32:/home/SPECcpu-20140116-ic14.0/libs/64:/home/SPECcpu-20140116-ic14.0/sh"
OMP_NUM_THREADS = "20"
```

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4
(Intel Xeon E5-2690 v2, 3.00 GHz)

SPECint2006 = 62.1

SPECint_base2006 = 57.7

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

General Notes (Continued)

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs
-L/sh -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4
(Intel Xeon E5-2690 v2, 3.00 GHz)

SPECint2006 = 62.1

SPECint_base2006 = 57.7

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-ansi-alias

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch
-ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4
(Intel Xeon E5-2690 v2, 3.00 GHz)

SPECint2006 = 62.1

SPECint_base2006 = 57.7

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

456.hmmr: basepeak = yes

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 23:40:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 18 June 2014.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 6