



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3500 M4
(Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint®2006 = 55.6

SPECint_base2006 = 51.9

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

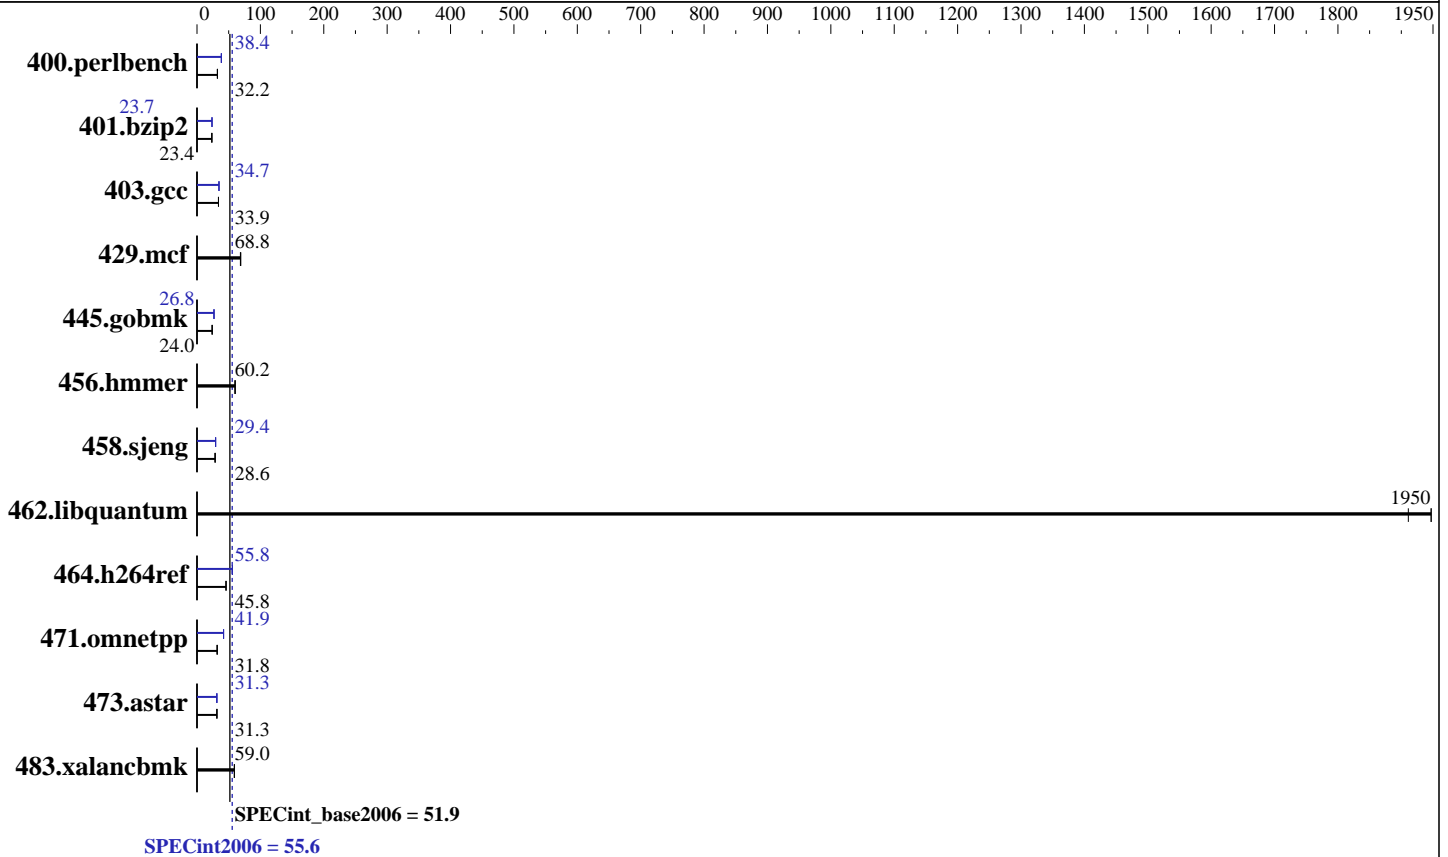

Hardware

CPU Name: Intel Xeon E5-2650 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-13, ECC)
 Disk Subsystem: 1 x 1 TB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3500 M4
(Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint2006 = **55.6**

SPECint_base2006 = **51.9**

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	303	32.2	303	32.2	<u>303</u>	<u>32.2</u>	<u>254</u>	<u>38.4</u>	254	38.5	254	38.4
401.bzip2	412	23.4	412	23.4	<u>412</u>	<u>23.4</u>	<u>408</u>	<u>23.7</u>	407	23.7	408	23.7
403.gcc	<u>237</u>	<u>33.9</u>	237	33.9	238	33.8	<u>232</u>	<u>34.7</u>	232	34.7	232	34.7
429.mcf	133	68.5	132	69.0	<u>133</u>	<u>68.8</u>	133	68.5	132	69.0	<u>133</u>	<u>68.8</u>
445.gobmk	438	24.0	439	23.9	<u>438</u>	<u>24.0</u>	391	26.8	391	26.8	<u>391</u>	<u>26.8</u>
456.hammer	155	60.3	156	59.9	<u>155</u>	<u>60.2</u>	155	60.3	156	59.9	<u>155</u>	<u>60.2</u>
458.sjeng	<u>423</u>	<u>28.6</u>	423	28.6	423	28.6	<u>412</u>	<u>29.4</u>	412	29.4	412	29.4
462.libquantum	10.6	1950	<u>10.6</u>	<u>1950</u>	10.8	1910	10.6	1950	<u>10.6</u>	<u>1950</u>	10.8	1910
464.h264ref	483	45.8	483	45.8	<u>483</u>	<u>45.8</u>	<u>397</u>	<u>55.8</u>	397	55.8	396	55.9
471.omnetpp	196	31.8	<u>196</u>	<u>31.8</u>	196	31.9	<u>149</u>	<u>41.9</u>	149	41.9	149	41.9
473.astar	<u>224</u>	<u>31.3</u>	222	31.6	224	31.3	<u>223</u>	<u>31.5</u>	<u>225</u>	<u>31.3</u>	225	31.2
483.xalancbmk	117	59.1	<u>117</u>	<u>59.0</u>	117	58.9	<u>117</u>	<u>59.1</u>	<u>117</u>	<u>59.0</u>	117	58.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode
Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:
intel_idle.max_cstate=0

Platform Notes

BIOS setting:
Operating Mode set to Maximum Performance
Hyper-Threading set to Disable
Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on x3500M4 Mon Jul 28 22:28:53 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2650 v2 @ 2.60GHz
1 "physical id"s (chips)
8 "processors"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 55.6

IBM System x3500 M4
(Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint_base2006 = 51.9

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings  : 8
physical 0: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      132275128 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux x3500M4 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 28 19:31
```

```
SPEC is set to: /home/SPECcpu-20140116-ic14.0
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_intelcrb-lv_home
                ext4      863G  40G  780G   5% /home
```

```
Additional information from dmidecode:
BIOS IBM  -[Y5E139ZUS-1.70]- 06/25/2014
Memory:
16x Not Specified Not Specified
8x Samsung M393B2G70QH0-CMA 16 GB 1867 MHz 2 rank
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/SPECcpu-20140116-ic14.0/libs/32:/home/SPECcpu-20140116-ic14.0/libs/64:/home/SPECcpu-20140116-ic14.0/sh"
OMP_NUM_THREADS = "8"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 55.6

IBM System x3500 M4
(Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint_base2006 = 51.9

CPU2006 license: 11

Test date: Jul-2014

Test sponsor: IBM Corporation

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

General Notes (Continued)

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs
-L/sh -lsmartheap64

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 55.6

IBM System x3500 M4
(Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint_base2006 = 51.9

CPU2006 license: 11

Test date: Jul-2014

Test sponsor: IBM Corporation

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-ansi-alias
401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch
-ansi-alias
403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32
429.mcf: basepeak = yes
445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3500 M4
(Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint2006 = 55.6

SPECint_base2006 = 51.9

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

Peak Optimization Flags (Continued)

456.hmmcr: basepeak = yes

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3500 M4
(Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint2006 = 55.6

SPECint_base2006 = 51.9

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Aug 26 18:08:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 August 2014.