



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M4 (Intel Xeon E5-2620 v3 @ 2.40GHz)

**SPECint<sup>®</sup>\_rate2006 = 527**

**SPECint\_rate\_base2006 = 509**

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

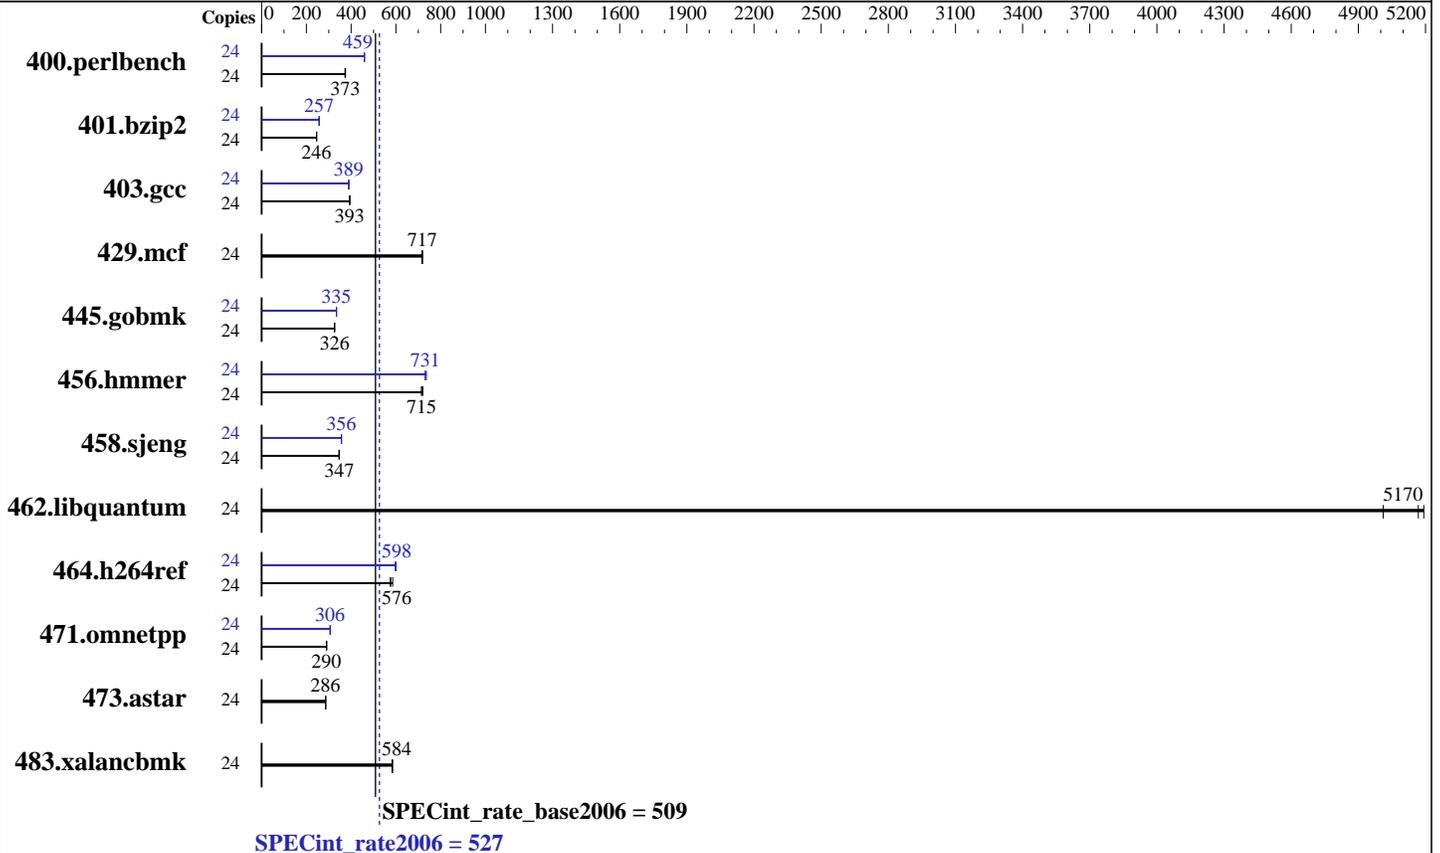

### Hardware

CPU Name: Intel Xeon E5-2620 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)  
 Disk Subsystem: 1 x 300GB SAS, 15K RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M4 (Intel Xeon E5-2620 v3 @ 2.40GHz)

SPECint\_rate2006 = 527

SPECint\_rate\_base2006 = 509

CPU2006 license: 9019  
Test sponsor: Cisco Systems  
Tested by: Cisco Systems

Test date: Dec-2014  
Hardware Availability: Sep-2014  
Software Availability: Nov-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	625	375	629	373	<b><u>628</u></b>	<b><u>373</u></b>	24	<b><u>511</u></b>	<b><u>459</u></b>	511	459	510	460
401.bzip2	24	942	246	944	245	<b><u>943</u></b>	<b><u>246</u></b>	24	900	257	902	257	<b><u>900</u></b>	<b><u>257</u></b>
403.gcc	24	489	395	493	392	<b><u>491</u></b>	<b><u>393</u></b>	24	495	390	<b><u>496</u></b>	<b><u>389</u></b>	497	389
429.mcf	24	306	716	304	719	<b><u>305</u></b>	<b><u>717</u></b>	24	306	716	304	719	<b><u>305</u></b>	<b><u>717</u></b>
445.gobmk	24	773	326	<b><u>772</u></b>	<b><u>326</u></b>	771	326	24	<b><u>753</u></b>	<b><u>335</u></b>	752	335	753	334
456.hammer	24	<b><u>313</u></b>	<b><u>715</u></b>	311	721	313	715	24	306	731	<b><u>306</u></b>	<b><u>731</u></b>	304	736
458.sjeng	24	<b><u>838</u></b>	<b><u>347</u></b>	839	346	838	347	24	<b><u>815</u></b>	<b><u>356</u></b>	816	356	812	358
462.libquantum	24	95.8	5190	<b><u>96.2</u></b>	<b><u>5170</u></b>	99.2	5010	24	95.8	5190	<b><u>96.2</u></b>	<b><u>5170</u></b>	99.2	5010
464.h264ref	24	<b><u>922</u></b>	<b><u>576</u></b>	907	586	923	575	24	<b><u>888</u></b>	<b><u>598</u></b>	883	601	889	597
471.omnetpp	24	515	291	519	289	<b><u>517</u></b>	<b><u>290</u></b>	24	<b><u>490</u></b>	<b><u>306</u></b>	490	306	489	307
473.astar	24	590	286	<b><u>590</u></b>	<b><u>286</u></b>	587	287	24	590	286	<b><u>590</u></b>	<b><u>286</u></b>	587	287
483.xalancbmk	24	284	583	283	585	<b><u>284</u></b>	<b><u>584</u></b>	24	284	583	283	585	<b><u>284</u></b>	<b><u>584</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

CPU performance set to HPC  
Power Technology set to Custom  
Processor Power State C6 set to Disabled  
Energy Performance BIAS setting set to Performance  
Memory RAS configuration set to Maximum Performance  
Snoop Mode set to Early Snoop  
Sysinfo program /home/cpu2006-1.2/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on rhel65 Sun Dec 14 13:44:05 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2620 v3 @ 2.40GHz  
2 "physical id"s (chips)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M4 (Intel Xeon E5-2620 v3 @ 2.40GHz)

**SPECint\_rate2006 = 527**

**SPECint\_rate\_base2006 = 509**

**CPU2006 license:** 9019  
**Test sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test date:** Dec-2014  
**Hardware Availability:** Sep-2014  
**Software Availability:** Nov-2013

### Platform Notes (Continued)

```

24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 6
  siblings  : 12
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB

From /proc/meminfo
MemTotal:      264423188 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux rhel65 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
x86_64 x86_64 GNU/Linux

run-level 3 Dec 14 13:42

SPEC is set to: /home/cpu2006-1.2
Filesystem                Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_rhel65-lv_home ext4      221G   30G  180G  15% /home

Additional information from dmidecode:
BIOS Cisco Systems, Inc. C220M4.2.0.3.0.080720142114 08/07/2014
Memory:
 16x 0xCE00 M393A2G40DB0-CPB 16 GB 1866 MHz 2 rank
 8x NO DIMM NO DIMM

(End of data from sysinfo program)

```

### General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006-1.2/libs/32:/home/cpu2006-1.2/libs/64:/home/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Cisco Systems**

Cisco UCS C220 M4 (Intel Xeon E5-2620 v3 @ 2.40GHz)

**SPECint\_rate2006 = 527**

**SPECint\_rate\_base2006 = 509**

**CPU2006 license:** 9019  
**Test sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test date:** Dec-2014  
**Hardware Availability:** Sep-2014  
**Software Availability:** Nov-2013

## General Notes (Continued)

```
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M4 (Intel Xeon E5-2620 v3 @ 2.40GHz)

SPECint\_rate2006 = 527

SPECint\_rate\_base2006 = 509

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

## Peak Compiler Invocation (Continued)

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M4 (Intel Xeon E5-2620 v3 @ 2.40GHz)

**SPECint\_rate2006 = 527**

**SPECint\_rate\_base2006 = 509**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Dec-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Dec 30 16:13:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 30 December 2014.