



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2028UT-BTNRT
(X10DBT-T , Intel Xeon E7-2880 v2)

SPECint_rate2006 = 1100

SPECint_rate_base2006 = 1060

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2014

Hardware Availability: Oct-2014

Software Availability: Sep-2014

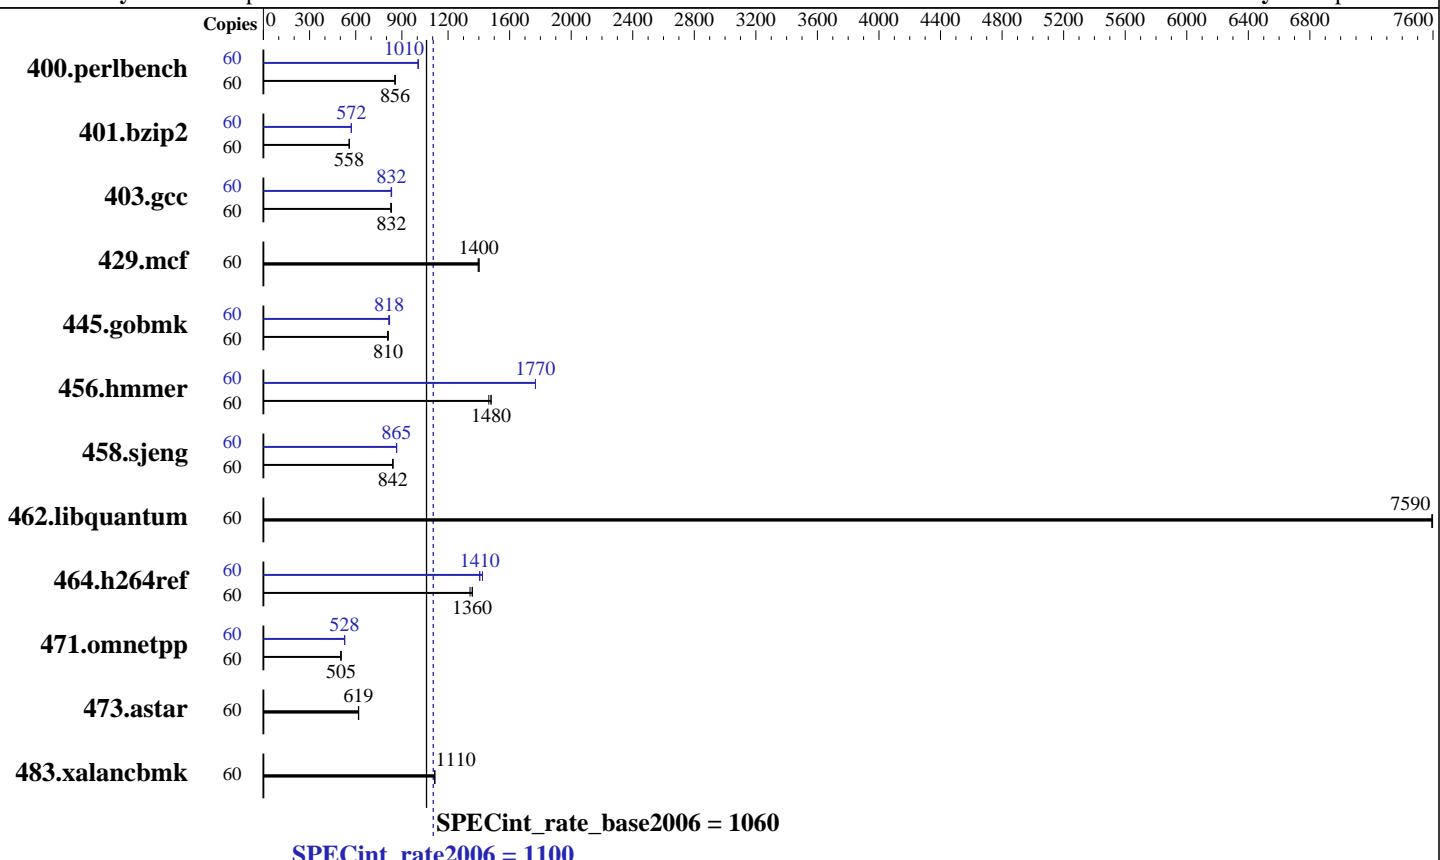

Hardware	
CPU Name:	Intel Xeon E7-2880 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.10 GHz
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	30 cores, 2 chips, 15 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	37.5 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (32 x 8 GB 2Rx8 PC3-14900R-13, ECC, running at 1333 MHz)
Disk Subsystem:	1 x 400 GB SATA III, 7200 RPM
Other Hardware:	None

Software	
Operating System:	Red Hat Enterprise Linux Server release 7.0, Kernel 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2028UT-BTNRT
(X10DBT-T , Intel Xeon E7-2880 v2)

SPECint_rate2006 = 1100

SPECint_rate_base2006 = 1060

CPU2006 license: 001176

Test date: Dec-2014

Test sponsor: Supermicro

Hardware Availability: Oct-2014

Tested by: Supermicro

Software Availability: Sep-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	60	685	856	686	854	684	857	60	582	1010	582	1010	584	1000
401.bzip2	60	1038	558	1038	558	1037	558	60	1012	572	1012	572	1014	571
403.gcc	60	580	832	580	833	584	827	60	580	833	580	832	582	830
429.mcf	60	392	1400	390	1400	391	1400	60	392	1400	390	1400	391	1400
445.gobmk	60	776	811	780	807	777	810	60	768	820	769	818	773	815
456.hammer	60	378	1480	378	1480	382	1460	60	317	1770	317	1770	317	1770
458.sjeng	60	863	842	863	842	864	840	60	839	865	839	865	838	867
462.libquantum	60	164	7590	164	7600	164	7590	60	164	7590	164	7600	164	7590
464.h264ref	60	989	1340	978	1360	978	1360	60	944	1410	945	1400	932	1420
471.omnetpp	60	743	505	742	505	746	503	60	710	528	712	527	709	529
473.astar	60	680	619	682	617	681	619	60	680	619	682	617	681	619
483.xalancbmk	60	372	1110	372	1110	372	1110	60	372	1110	372	1110	372	1110

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/SPEC2K6/SPEC2006-V12/libs/32:/home/SPEC2K6/SPEC2006-V12/libs/64:/home/SPEC2K6/SPEC2006-V12/sh"
```

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2028UT-BTNRT
(X10DBT-T , Intel Xeon E7-2880 v2)

SPECint_rate2006 = 1100

SPECint_rate_base2006 = 1060

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2014

Hardware Availability: Oct-2014

Software Availability: Sep-2014

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2028UT-BTNRT
(X10DBT-T , Intel Xeon E7-2880 v2)

SPECint_rate2006 = 1100

SPECint_rate_base2006 = 1060

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2014

Hardware Availability: Oct-2014

Software Availability: Sep-2014

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2028UT-BTNRT
(X10DBT-T , Intel Xeon E7-2880 v2)

SPECint_rate2006 = 1100

SPECint_rate_base2006 = 1060

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2014

Hardware Availability: Oct-2014

Software Availability: Sep-2014

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jan 13 10:54:57 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 January 2015.