



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint®2006 = 62.6

Huawei CH242 V3 (Intel Xeon E7-8893 v2)

SPECint_base2006 = 59.8

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

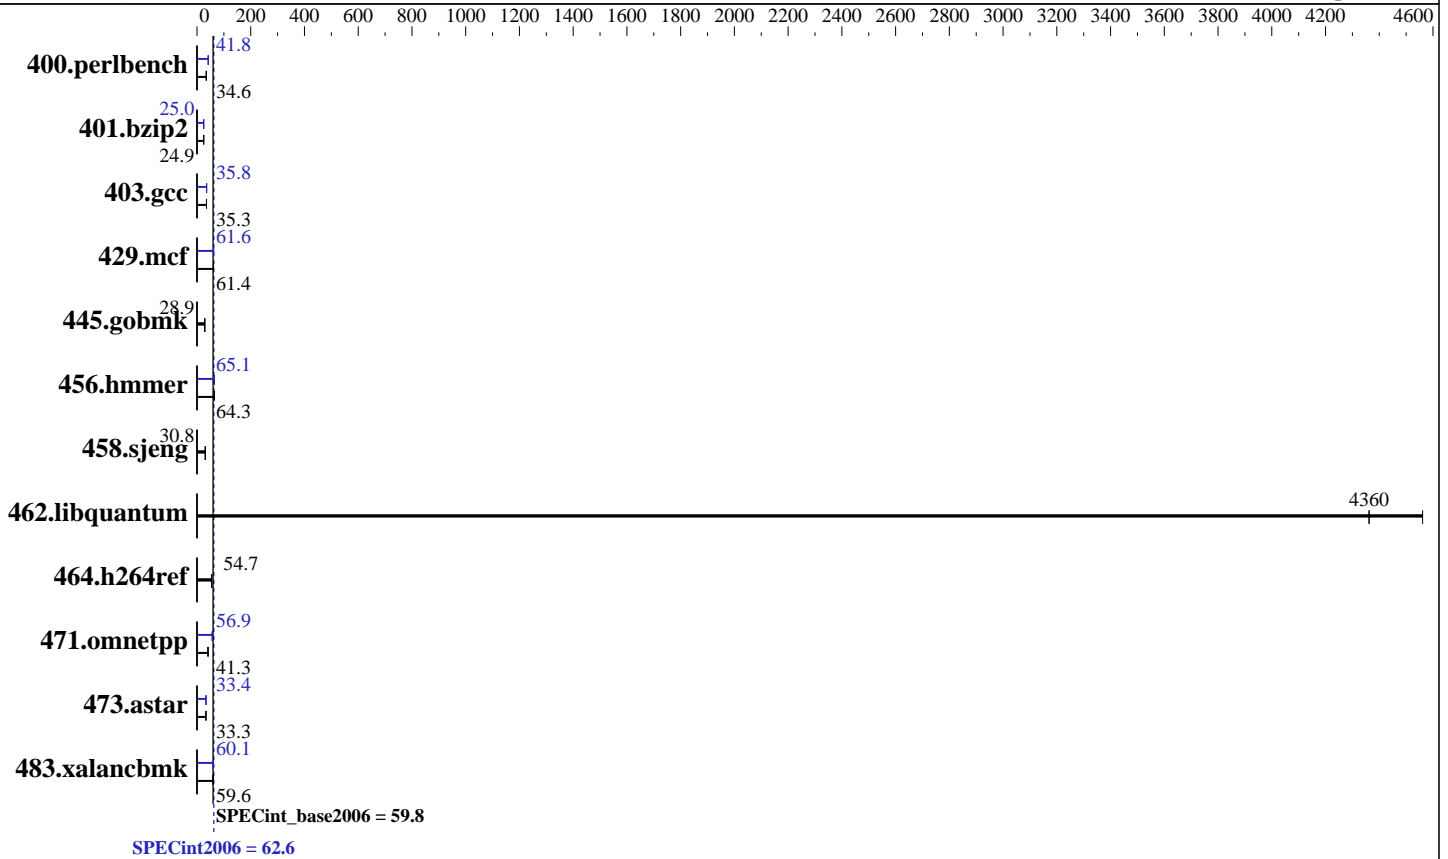

Hardware

CPU Name: Intel Xeon E7-8893 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 37.5 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
 3.10.0-123.el7.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 62.6

Huawei CH242 V3 (Intel Xeon E7-8893 v2)

SPECint_base2006 = 59.8

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Jan-2015
Hardware Availability: Sep-2014
Software Availability: Sep-2014

Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|----------------|-------------------|--------------------|-------------------|--------------------|--------------------|--------------------|-------------------|--------------------|-------------------|--------------------|--------------------|--------------------|
| | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 281 | 34.7 | <u>282</u> | <u>34.6</u> | 283 | 34.5 | 234 | 41.8 | <u>233</u> | <u>41.8</u> | 233 | 41.9 |
| 401.bzip2 | 387 | 24.9 | <u>388</u> | <u>24.9</u> | 388 | 24.9 | 386 | 25.0 | 387 | 24.9 | <u>387</u> | <u>25.0</u> |
| 403.gcc | 227 | 35.4 | <u>228</u> | <u>35.3</u> | 228 | 35.3 | 224 | 35.9 | 225 | 35.7 | <u>225</u> | <u>35.8</u> |
| 429.mcf | <u>149</u> | <u>61.4</u> | 150 | 61.0 | 148 | 61.6 | 148 | 61.5 | <u>148</u> | <u>61.6</u> | 147 | 62.0 |
| 445.gobmk | 363 | 28.9 | <u>363</u> | <u>28.9</u> | 363 | 28.9 | 363 | 28.9 | <u>363</u> | <u>28.9</u> | 363 | 28.9 |
| 456.hammer | <u>145</u> | <u>64.3</u> | 145 | 64.3 | 146 | 64.1 | 143 | 65.1 | <u>143</u> | <u>65.1</u> | 143 | 65.1 |
| 458.sjeng | 392 | 30.9 | <u>392</u> | <u>30.8</u> | 393 | 30.8 | 392 | 30.9 | <u>392</u> | <u>30.8</u> | 393 | 30.8 |
| 462.libquantum | 4.54 | 4560 | 4.75 | 4360 | <u>4.75</u> | <u>4360</u> | 4.54 | 4560 | 4.75 | 4360 | <u>4.75</u> | <u>4360</u> |
| 464.h264ref | <u>405</u> | <u>54.7</u> | 406 | 54.6 | 405 | 54.7 | <u>405</u> | <u>54.7</u> | 406 | 54.6 | 405 | 54.7 |
| 471.omnetpp | <u>151</u> | <u>41.3</u> | 151 | 41.4 | 156 | 40.1 | 111 | 56.5 | <u>110</u> | <u>56.9</u> | 109 | 57.2 |
| 473.astar | <u>211</u> | <u>33.3</u> | 210 | 33.4 | 213 | 32.9 | <u>210</u> | <u>33.4</u> | 212 | 33.1 | 209 | 33.6 |
| 483.xalancbmk | <u>116</u> | <u>59.6</u> | 116 | 59.6 | 116 | 59.6 | <u>115</u> | <u>60.1</u> | 115 | 60.1 | 115 | 60.1 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Set Power Efficiency Mode to Custom
Baseboard Management Controller used to adjust the fan speed to 100%
Set Hyper Threading to Disabled
Sysinfo program /spec/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Fri Jan 23 06:04:49 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8893 v2 @ 3.40GHz
4 "physical id"s (chips)
24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 62.6

Huawei CH242 V3 (Intel Xeon E7-8893 v2)

SPECint_base2006 = 59.8

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Platform Notes (Continued)

```

cpu cores : 6
siblings  : 6
physical 0: cores 3 4 5 6 10 11
physical 1: cores 3 4 5 6 10 11
physical 2: cores 3 4 5 6 10 11
physical 3: cores 3 4 5 6 10 11
cache size : 38400 KB

```

From /proc/meminfo

```

MemTotal:      263804112 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

```

uname -a:

```

Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Jan 23 04:25

SPEC is set to: /spec

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   445G  160G  285G  36% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. BLISV308 11/28/2014

Memory:

32x Micron 36KSF1G72PZ-1G6K1 8 GB 2 rank 1600 MHz, configured at 1333 MHz

(End of data from sysinfo program)



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

| | | |
|--|---------------------------|-------------|
| Huawei | SPECint2006 = | 62.6 |
| Huawei CH242 V3 (Intel Xeon E7-8893 v2) | SPECint_base2006 = | 59.8 |

| | |
|------------------------------|--|
| CPU2006 license: 3175 | Test date: Jan-2015 |
| Test sponsor: Huawei | Hardware Availability: Sep-2014 |
| Tested by: Huawei | Software Availability: Sep-2014 |

General Notes

Environment variables set by runspec before the start of the run:
 KMP_AFFINITY = "granularity=fine,scatter"
 LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"
 OMP_NUM_THREADS = "24"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:
 icc -m64

C++ benchmarks:
 icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 471.omnetpp: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
 -xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:
 -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
 -Wl,-z,muldefs -L/sh -lsmartheap64



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 62.6

Huawei CH242 V3 (Intel Xeon E7-8893 v2)

SPECint_base2006 = 59.8

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

C++ benchmarks (except as noted below):

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-alloc
-opt-malloc-options=3 -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 62.6

Huawei CH242 V3 (Intel Xeon E7-8893 v2)

SPECint_base2006 = 59.8

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-auto-p32

445.gobmk: basepeak = yes

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias

458.sjeng: basepeak = yes

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 62.6

Huawei CH242 V3 (Intel Xeon E7-8893 v2)

SPECint_base2006 = 59.8

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jun 2 13:45:03 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 June 2015.