



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2048U-RTR4
(X10QRH+ , Intel Xeon E5-4667 v3)

SPECfp®2006 = 103

SPECfp_base2006 = 96.9

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

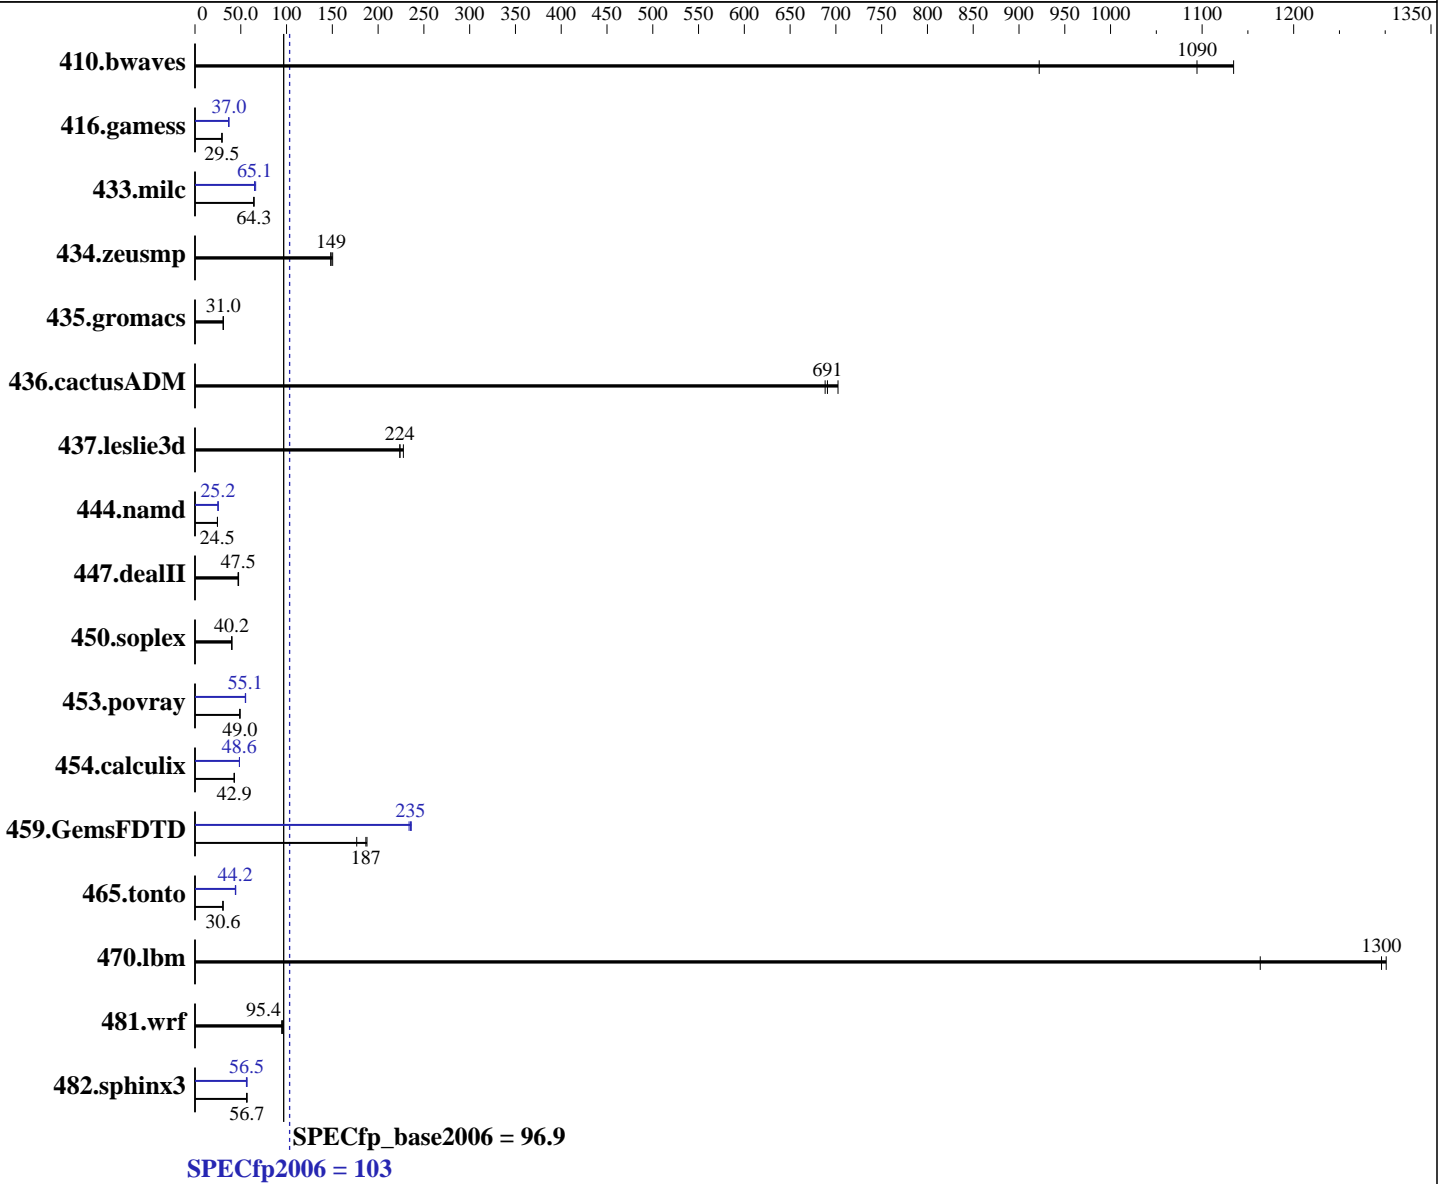

Hardware

CPU Name: Intel Xeon E5-4667 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip
 CPU(s) orderable: 1,2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12, Kernel 3.12.28-4-default
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2048U-RTR4
(X10QRH+ , Intel Xeon E5-4667 v3)

SPECfp2006 = 103

SPECfp_base2006 = 96.9

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

L3 Cache: 40 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem: 1 x 600 GB SATA II, SSD
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	14.7	922	<u>12.4</u>	<u>1090</u>	12.0	1130	14.7	922	<u>12.4</u>	<u>1090</u>	12.0	1130
416.gamess	664	29.5	<u>664</u>	<u>29.5</u>	667	29.4	529	37.0	533	36.7	<u>530</u>	<u>37.0</u>
433.milc	142	64.4	<u>143</u>	<u>64.3</u>	143	64.3	141	65.1	<u>141</u>	<u>65.1</u>	139	66.2
434.zeusmp	60.5	150	61.4	148	<u>61.2</u>	<u>149</u>	60.5	150	61.4	148	<u>61.2</u>	<u>149</u>
435.gromacs	232	30.7	230	31.0	<u>231</u>	<u>31.0</u>	232	30.7	230	31.0	<u>231</u>	<u>31.0</u>
436.cactusADM	<u>17.3</u>	<u>691</u>	17.4	688	17.0	702	<u>17.3</u>	<u>691</u>	17.4	688	17.0	702
437.leslie3d	41.3	228	<u>42.0</u>	<u>224</u>	42.0	224	41.3	228	<u>42.0</u>	<u>224</u>	42.0	224
444.namd	327	24.5	<u>327</u>	<u>24.5</u>	327	24.5	318	25.2	318	25.2	<u>318</u>	<u>25.2</u>
447.dealII	243	47.0	240	47.6	<u>241</u>	<u>47.5</u>	243	47.0	240	47.6	<u>241</u>	<u>47.5</u>
450.soplex	208	40.1	<u>208</u>	<u>40.2</u>	207	40.2	208	40.1	<u>208</u>	<u>40.2</u>	207	40.2
453.povray	<u>108</u>	<u>49.0</u>	108	49.2	109	48.9	96.7	55.0	<u>96.6</u>	<u>55.1</u>	96.1	55.3
454.calculix	193	42.8	192	42.9	<u>192</u>	<u>42.9</u>	170	48.6	170	48.5	<u>170</u>	<u>48.6</u>
459.GemsFDTD	<u>56.9</u>	<u>187</u>	60.1	177	56.5	188	<u>45.1</u>	<u>235</u>	45.4	234	44.9	236
465.tonto	<u>322</u>	<u>30.6</u>	321	30.7	323	30.4	223	44.1	<u>223</u>	<u>44.2</u>	221	44.5
470.lbm	<u>10.6</u>	<u>1300</u>	11.8	1160	10.6	1300	<u>10.6</u>	<u>1300</u>	11.8	1160	10.6	1300
481.wrf	<u>117</u>	<u>95.4</u>	118	94.7	117	95.9	<u>117</u>	<u>95.4</u>	118	94.7	117	95.9
482.sphinx3	346	56.3	343	56.8	<u>344</u>	<u>56.7</u>	<u>345</u>	<u>56.5</u>	347	56.2	343	56.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Hyper-Threading (ALL) = Disable
COD Enable = Disable
Early Snoop = Disable
Enforce POR = Disabled
Sysinfo program /home/SPEC2K6/SPEC2006-V12/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on 18-216 Thu Jun 18 16:50:17 2015

This section contains SUT (System Under Test) info as seen by
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2048U-RTR4
(X10QRH+ , Intel Xeon E5-4667 v3)

SPECfp2006 = 103

SPECfp_base2006 = 96.9

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) CPU E5-4667 v3 @ 2.00GHz
 4 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores     : 16
  siblings      : 16
  physical 0:   cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 1:   cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 2:   cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 3:   cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size     : 40960 KB

```

From /proc/meminfo

```

MemTotal:      529334248 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 12

From /etc/*release* /etc/*version*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.

os-release:
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"

```

uname -a:

```

Linux 18-216 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014 (9879bd4)
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 5 Jun 18 10:34

SPEC is set to: /home/SPEC2K6/SPEC2006-V12

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       ext4  529G  9.1G  519G   2% /home

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2048U-RTR4
(X10QRH+ , Intel Xeon E5-4667 v3)

SPECfp2006 = 103

SPECfp_base2006 = 96.9

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

Platform Notes (Continued)

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.00 05/28/2015

Memory:

16x NO DIMM NO DIMM

7x Samsung(data:13/51) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

3x Samsung(data:14/16) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

8x Samsung(data:14/17) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

6x Samsung(data:14/25) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

8x Samsung(data:14/26) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,0,1"

LD_LIBRARY_PATH = "/home/SPEC2K6/SPEC2006-V12/libs/32:/home/SPEC2K6/SPEC2006-V12/libs/64:/home/SPEC2K6/SPEC2006-V12/sh"

OMP_NUM_THREADS = "64"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2048U-RTR4
(X10QRH+ , Intel Xeon E5-4667 v3)

SPECfp2006 = 103

SPECfp_base2006 = 96.9

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2015
Hardware Availability: Jun-2015
Software Availability: Oct-2014

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2048U-RTR4
(X10QRH+ , Intel Xeon E5-4667 v3)

SPECfp2006 = 103

SPECfp_base2006 = 96.9

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2048U-RTR4
(X10QRH+ , Intel Xeon E5-4667 v3)

SPECfp2006 = 103

SPECfp_base2006 = 96.9

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

Peak Optimization Flags (Continued)

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Aug 6 13:25:44 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 August 2015.