



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp®\_rate2006 = 357**

PowerEdge R530 (Intel Xeon E5-2623 v4, 2.60 GHz)

**SPECfp\_rate\_base2006 = 350**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

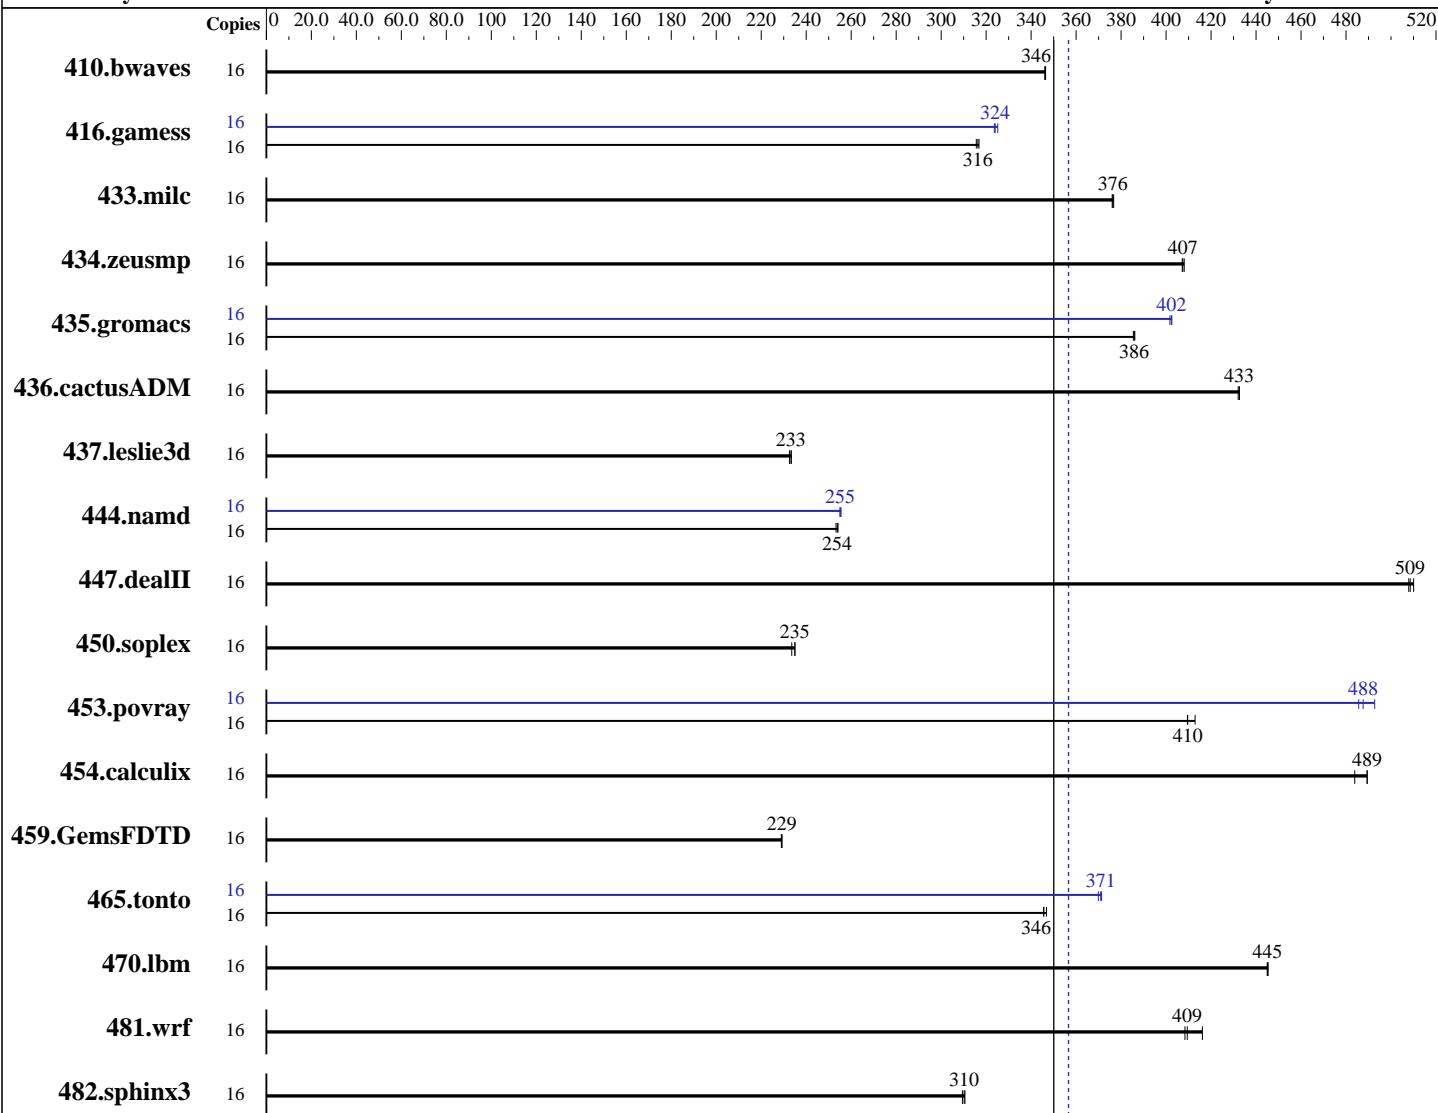

**SPECfp\_rate\_base2006 = 350**

**SPECfp\_rate2006 = 357**

## Hardware

CPU Name: Intel Xeon E5-2623 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default  
 Compiler: C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.2.181 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 357**

PowerEdge R530 (Intel Xeon E5-2623 v4, 2.60 GHz)

**SPECfp\_rate\_base2006 = 350**

CPU2006 license: 55

Test date: Jun-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

L3 Cache: 10 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx8 PC4-2400T-R, running at 2133 MHz)  
 Disk Subsystem: 1 x 250 GB 7200 RPM SATA HDD  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	<b>628</b>	<b>346</b>	628	346	628	346	16	<b>628</b>	<b>346</b>	628	346	628	346	628	346
416.gamess	16	993	316	<b>990</b>	<b>316</b>	989	317	16	963	325	<b>967</b>	<b>324</b>	968	324	968	324
433.milc	16	391	376	<b>390</b>	<b>376</b>	390	377	16	391	376	<b>390</b>	<b>376</b>	390	377	390	377
434.zeusmp	16	357	408	<b>357</b>	<b>407</b>	358	407	16	357	408	<b>357</b>	<b>407</b>	358	407	358	407
435.gromacs	16	296	385	296	386	<b>296</b>	<b>386</b>	16	<b>284</b>	<b>402</b>	284	402	284	403	284	403
436.cactusADM	16	442	433	<b>442</b>	<b>433</b>	443	432	16	442	433	<b>442</b>	<b>433</b>	443	432	443	432
437.leslie3d	16	644	233	<b>645</b>	<b>233</b>	647	233	16	644	233	<b>645</b>	<b>233</b>	647	233	647	233
444.namd	16	<b>506</b>	<b>254</b>	505	254	507	253	16	503	255	502	255	<b>503</b>	<b>255</b>	<b>503</b>	<b>255</b>
447.dealII	16	359	510	360	508	<b>360</b>	<b>509</b>	16	359	510	360	508	<b>360</b>	<b>509</b>	<b>360</b>	<b>509</b>
450.soplex	16	568	235	571	234	<b>568</b>	<b>235</b>	16	568	235	571	234	<b>568</b>	<b>235</b>	<b>568</b>	<b>235</b>
453.povray	16	206	413	208	409	<b>208</b>	<b>410</b>	16	173	493	<b>175</b>	<b>488</b>	175	486	175	486
454.calculix	16	273	484	270	489	<b>270</b>	<b>489</b>	16	273	484	270	489	<b>270</b>	<b>489</b>	<b>270</b>	<b>489</b>
459.GemsFDTD	16	<b>741</b>	<b>229</b>	741	229	741	229	16	<b>741</b>	<b>229</b>	741	229	741	229	741	229
465.tonto	16	456	346	454	347	<b>456</b>	<b>346</b>	16	424	371	<b>424</b>	<b>371</b>	426	370	426	370
470.lbm	16	494	445	494	445	<b>494</b>	<b>445</b>	16	494	445	494	445	<b>494</b>	<b>445</b>	<b>494</b>	<b>445</b>
481.wrf	16	429	416	438	408	<b>437</b>	<b>409</b>	16	429	416	438	408	<b>437</b>	<b>409</b>	<b>437</b>	<b>409</b>
482.sphinx3	16	1008	309	1004	311	<b>1005</b>	<b>310</b>	16	1008	309	1004	311	<b>1005</b>	<b>310</b>	<b>1005</b>	<b>310</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:

Snoop Mode set to Cluster on Die

Virtualization Technology disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 357**

PowerEdge R530 (Intel Xeon E5-2623 v4, 2.60 GHz)

**SPECfp\_rate\_base2006 = 350**

**CPU2006 license:** 55

**Test date:** Jun-2016

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jun-2016

**Tested by:** Dell Inc.

**Software Availability:** Dec-2015

## Platform Notes (Continued)

System Profile set to custom

CPU Power Management set to Hardware P States

C States set to Autonomous

C1E disabled

Energy Efficient Turbo disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Balanced Performance

Memory Patrol Scrub disabled

Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1

running on linux-g0aw Thu Jun 2 04:59:15 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2623 v4@ 2.60GHz
        2 "physical id"s (chips)
        16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 4
siblings : 8
physical 0: cores 0 1 2 3
physical 1: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      132185432 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP1
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R530 (Intel Xeon E5-2623 v4, 2.60 GHz)

**SPECfp\_rate2006 = 357**

**SPECfp\_rate\_base2006 = 350**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Jun-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Dec-2015

## Platform Notes (Continued)

CPE\_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:

```
Linux linux-g0aw 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jun 1 18:38

SPEC is set to: /root/cpu2006-1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	221G	8.7G	212G	4%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.0.1 04/11/2016

Memory:

7x 00AD063200AD HMA82GR7MFR8N-UH	16 GB	2 rank	2400 MHz	configured at 2133
MHz				
1x 00CE00B300CE M393A2K43BB1-CRC	16 GB	2 rank	2400 MHz	configured at 2133
MHz				
4x Not Specified	Not Specified			

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB memory using RedHat EL 7.2 glibc 2.17

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R530 (Intel Xeon E5-2623 v4, 2.60 GHz)

**SPECfp\_rate2006 = 357**

**SPECfp\_rate\_base2006 = 350**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Jun-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Dec-2015

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R530 (Intel Xeon E5-2623 v4, 2.60 GHz)

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

**SPECfp\_rate2006 = 357**

**SPECfp\_rate\_base2006 = 350**

**Test date:** Jun-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Dec-2015

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 357**

PowerEdge R530 (Intel Xeon E5-2623 v4, 2.60 GHz)

**SPECfp\_rate\_base2006 = 350**

**CPU2006 license:** 55

**Test date:** Jun-2016

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jun-2016

**Tested by:** Dell Inc.

**Software Availability:** Dec-2015

## Peak Optimization Flags (Continued)

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Aug 9 17:04:11 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 August 2016.