



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint®2006 = 75.3

Lenovo System x3550 M5
(2.40 GHz, Intel Xeon E5-2699A v4)

SPECint_base2006 = 73.2

CPU2006 license: 9017


Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

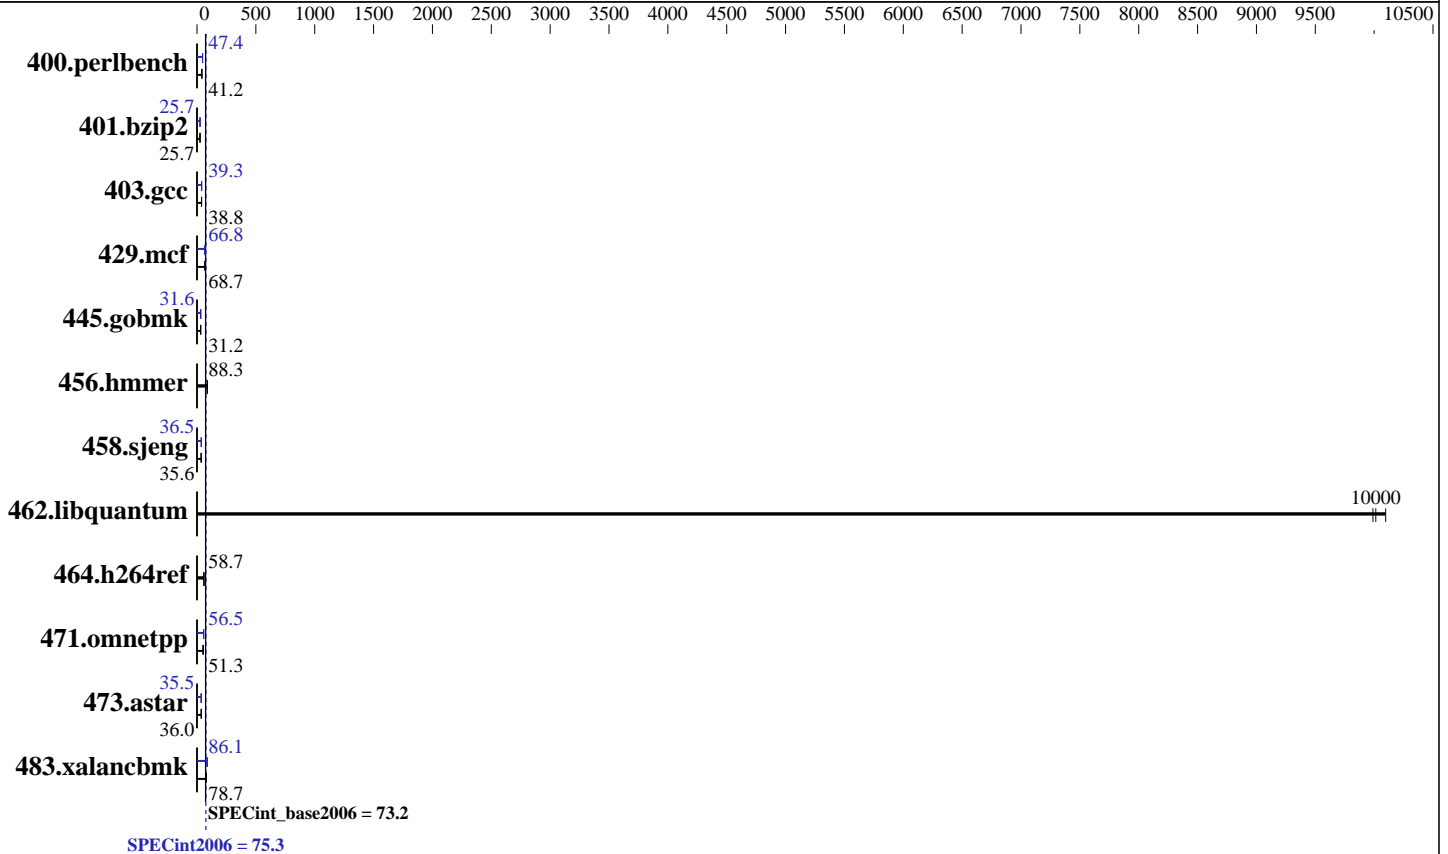

Hardware

CPU Name: Intel Xeon E5-2699A v4
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz: 2400
FPU: Integrated
CPU(s) enabled: 44 cores, 2 chips, 22 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 55 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86_64)
 Kernel 3.12.49-11-default
Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
Auto Parallel: Yes
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3550 M5
(2.40 GHz, Intel Xeon E5-2699A v4)

SPECint2006 = **75.3**

SPECint_base2006 = **73.2**

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Nov-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2016

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<u>237</u>	<u>41.2</u>	236	41.4	240	40.8	<u>206</u>	<u>47.4</u>	206	47.4	206	47.4
401.bzip2	<u>376</u>	<u>25.7</u>	375	25.7	376	25.7	376	25.7	375	25.7	<u>375</u>	<u>25.7</u>
403.gcc	208	38.8	207	38.8	<u>208</u>	<u>38.8</u>	203	39.6	<u>205</u>	<u>39.3</u>	207	39.0
429.mcf	132	69.3	139	65.4	<u>133</u>	<u>68.7</u>	137	66.5	135	67.5	<u>137</u>	<u>66.8</u>
445.gobmk	337	31.2	<u>337</u>	<u>31.2</u>	337	31.1	333	31.5	<u>332</u>	<u>31.6</u>	332	31.6
456.hammer	<u>106</u>	<u>88.3</u>	106	88.4	109	85.6	<u>106</u>	<u>88.3</u>	106	88.4	109	85.6
458.sjeng	340	35.5	339	35.7	<u>340</u>	<u>35.6</u>	331	36.5	<u>331</u>	<u>36.5</u>	331	36.6
462.libquantum	2.07	9990	2.05	10100	<u>2.07</u>	<u>10000</u>	2.07	9990	2.05	10100	<u>2.07</u>	<u>10000</u>
464.h264ref	377	58.8	378	58.6	<u>377</u>	<u>58.7</u>	377	58.8	378	58.6	<u>377</u>	<u>58.7</u>
471.omnetpp	119	52.6	<u>122</u>	<u>51.3</u>	122	51.3	110	56.6	111	56.5	<u>111</u>	<u>56.5</u>
473.astar	195	36.0	195	36.0	<u>195</u>	<u>36.0</u>	198	35.5	197	35.6	<u>197</u>	<u>35.5</u>
483.xalancbmk	86.0	80.2	88.0	78.4	<u>87.6</u>	<u>78.7</u>	80.0	86.3	80.4	85.9	<u>80.1</u>	<u>86.1</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:

Operating Mode set to Maximum Performance

Hyper-Threading set to Disabled

Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on 123123 Mon Nov 21 09:50:10 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2699A v4 @ 2.40GHz

2 "physical id"s (chips)

44 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 22

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 75.3

Lenovo System x3550 M5
(2.40 GHz, Intel Xeon E5-2699A v4)

SPECint_base2006 = 73.2

CPU2006 license: 9017

Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

Platform Notes (Continued)

```

siblings      : 22
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
28
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
28
cache size   : 56320 KB

From /proc/meminfo
MemTotal:    263826880 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:
Linux 123123 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015 (8d714a0)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 21 09:48

SPEC is set to: /home/cpu2006-1.2-ic16.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   689G   52G  638G   8% /home
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO -[TBE123H-2.10]- 03/25/2016
Memory:
16x Hynix HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz
8x NO DIMM Unknown

(End of data from sysinfo program)

```



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 75.3

Lenovo System x3550 M5
(2.40 GHz, Intel Xeon E5-2699A v4)

SPECint_base2006 = 73.2

CPU2006 license: 9017

Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh10.2"

OMP_NUM_THREADS = "44"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2
Transparent Huge Pages enabled by default.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
-auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 75.3

Lenovo System x3550 M5
(2.40 GHz, Intel Xeon E5-2699A v4)

SPECint_base2006 = 73.2

CPU2006 license: 9017

Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

445.gobmk: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

C++ benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

464.h264ref: -DSPEC_CPU_LP64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div -auto-ilp32 -qopt-prefetch

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 75.3

Lenovo System x3550 M5
(2.40 GHz, Intel Xeon E5-2699A v4)

SPECint_base2006 = 73.2

CPU2006 license: 9017

Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

Peak Optimization Flags (Continued)

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
-qopt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
-qopt-prefetch -auto-p32

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2)

456.hmmr: basepeak = yes

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-ra-region-strategy=block
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.xml>



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 75.3

Lenovo System x3550 M5
(2.40 GHz, Intel Xeon E5-2699A v4)

SPECint_base2006 = 73.2

CPU2006 license: 9017

Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Dec 15 11:18:08 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 December 2016.