



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2699 v4 2.20 GHz)

**SPECint\_rate2006 = 1740**

**SPECint\_rate\_base2006 = 1680**

**CPU2006 license:** 9019


**Test date:** Jan-2017

**Test sponsor:** Cisco Systems

**Hardware Availability:** Apr-2016

**Tested by:** Cisco Systems

**Software Availability:** Dec-2015

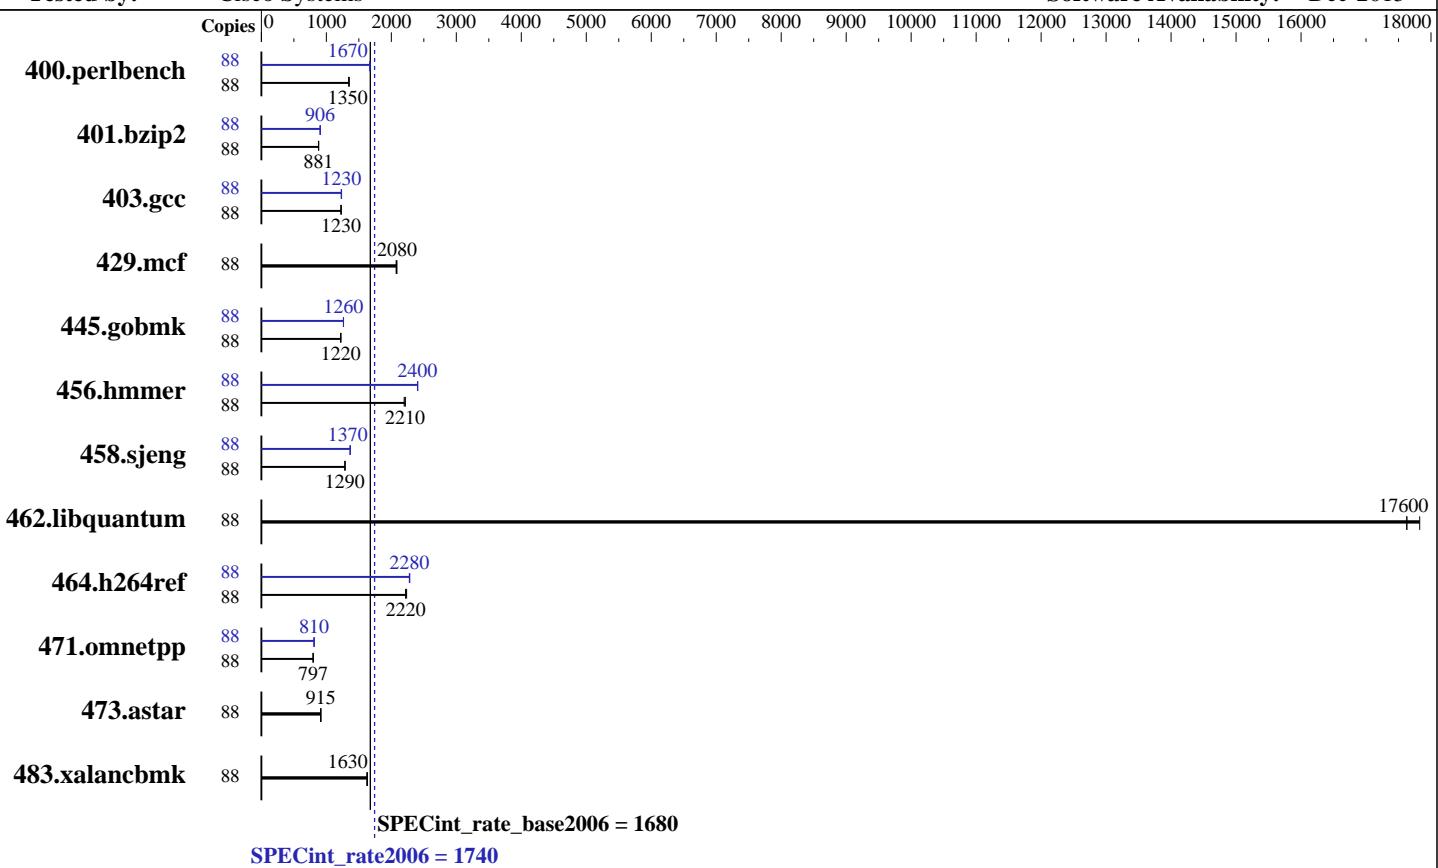

### Hardware

CPU Name:	Intel Xeon E5-2699 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	44 cores, 2 chips, 22 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	55 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem:	2 x 1.2 TB SAS HDD 10K RPM
Other Hardware:	None

### Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 (x86_64) 3.12.49-11-default
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2699 v4 2.20 GHz)

**SPECint\_rate2006 = 1740**

**SPECint\_rate\_base2006 = 1680**

**CPU2006 license:** 9019

**Test date:** Jan-2017

**Test sponsor:** Cisco Systems

**Hardware Availability:** Apr-2016

**Tested by:** Cisco Systems

**Software Availability:** Dec-2015

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	88	<b>637</b>	<b>1350</b>	640	1340	637	1350	88	<b>516</b>	<b>1670</b>	<b>515</b>	<b>1670</b>	514	1670
401.bzip2	88	963	882	<b>964</b>	<b>881</b>	967	878	88	940	903	937	907	<b>937</b>	<b>906</b>
403.gcc	88	<b>577</b>	<b>1230</b>	577	1230	579	1220	88	<b>574</b>	<b>1230</b>	<b>575</b>	<b>1230</b>	577	1230
429.mcf	88	387	2070	385	2090	<b>386</b>	<b>2080</b>	88	387	2070	385	2090	<b>386</b>	<b>2080</b>
445.gobmk	88	756	1220	756	1220	<b>756</b>	<b>1220</b>	88	731	1260	<b>731</b>	<b>1260</b>	730	1260
456.hammer	88	374	2200	371	2210	<b>371</b>	<b>2210</b>	88	<b>342</b>	<b>2400</b>	341	2410	342	2400
458.sjeng	88	828	1290	826	1290	<b>828</b>	<b>1290</b>	88	779	1370	780	1370	<b>779</b>	<b>1370</b>
462.libquantum	88	103	17600	102	17800	<b>103</b>	<b>17600</b>	88	103	17600	102	17800	<b>103</b>	<b>17600</b>
464.h264ref	88	871	2240	878	2220	<b>876</b>	<b>2220</b>	88	855	2280	<b>854</b>	<b>2280</b>	853	2280
471.omnetpp	88	<b>690</b>	<b>797</b>	689	798	691	796	88	679	810	<b>679</b>	<b>810</b>	677	813
473.astar	88	<b>675</b>	<b>915</b>	676	913	675	915	88	<b>675</b>	<b>915</b>	676	913	675	915
483.xalancbmk	88	374	1620	<b>373</b>	<b>1630</b>	372	1630	88	374	1620	<b>373</b>	<b>1630</b>	372	1630

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

CPU performance set to Enterprise

Power Technology set to Performance

Energy Performance BIAS setting set to Balanced Performance

Memory RAS configuration set to Maximum Performance

Memory Power Saving Mode set to Disabled

QPI Snoop Mode set to Cluster-on-Die

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1

running on linux-q59g Tue Jan 17 14:26:13 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2699 v4 @ 2.20GHz

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2699 v4 2.20 GHz)

**SPECint\_rate2006 = 1740**

**SPECint\_rate\_base2006 = 1680**

**CPU2006 license:** 9019

**Test date:** Jan-2017

**Test sponsor:** Cisco Systems

**Hardware Availability:** Apr-2016

**Tested by:** Cisco Systems

**Software Availability:** Dec-2015

## Platform Notes (Continued)

```
2 "physical id"s (chips)
 88 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 22
  siblings   : 44
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
  28
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
  28
cache size : 28160 KB
```

```
From /proc/meminfo
MemTotal:      264398512 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 1
  # This file is deprecated and will be removed in a future service pack or
  release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP1"
  VERSION_ID="12.1"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux linux-q59g 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 17 12:21
```

```
SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal        xfs   2.2T   76G  2.2T   4% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. B200M4.3.1.3f.0.110320162243 11/03/2016  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2699 v4 2.20 GHz)

**SPECint\_rate2006 = 1740**

**SPECint\_rate\_base2006 = 1680**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Jan-2017

**Hardware Availability:** Apr-2016

**Software Availability:** Dec-2015

## Platform Notes (Continued)

### Memory:

16x 0xCE00 M393A2G40EB1-CRC 16 GB 2 rank 2400 MHz  
8x NO DIMM NO DIMM

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmr: -D\_FILE\_OFFSET\_BITS=64  
458sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2699 v4 2.20 GHz)

**SPECint\_rate2006 = 1740**

**SPECint\_rate\_base2006 = 1680**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Jan-2017

**Hardware Availability:** Apr-2016

**Software Availability:** Dec-2015

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

```
400.perlbench: icc -m64
```

```
401.bzip2: icc -m64
```

```
456.hmmer: icc -m64
```

```
458.sjeng: icc -m64
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

## Peak Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
```

```
401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
```

```
403.gcc: -D_FILE_OFFSET_BITS=64
```

```
429.mcf: -D_FILE_OFFSET_BITS=64
```

```
445.gobmk: -D_FILE_OFFSET_BITS=64
```

```
456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
```

```
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
```

```
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

```
464.h264ref: -D_FILE_OFFSET_BITS=64
```

```
471.omnetpp: -D_FILE_OFFSET_BITS=64
```

```
473.astar: -D_FILE_OFFSET_BITS=64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2699 v4 2.20 GHz)

**SPECint\_rate2006 = 1740**

**SPECint\_rate\_base2006 = 1680**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Jan-2017

**Hardware Availability:** Apr-2016

**Software Availability:** Dec-2015

## Peak Portability Flags (Continued)

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias  
-opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2699 v4 2.20 GHz)

**SPECint\_rate2006 = 1740**

**SPECint\_rate\_base2006 = 1680**

**CPU2006 license:** 9019

**Test date:** Jan-2017

**Test sponsor:** Cisco Systems

**Hardware Availability:** Apr-2016

**Tested by:** Cisco Systems

**Software Availability:** Dec-2015

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Mar 7 16:15:02 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 March 2017.