



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECspeed®2017_fp_base = 278

SPECspeed®2017_fp_peak = 279

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

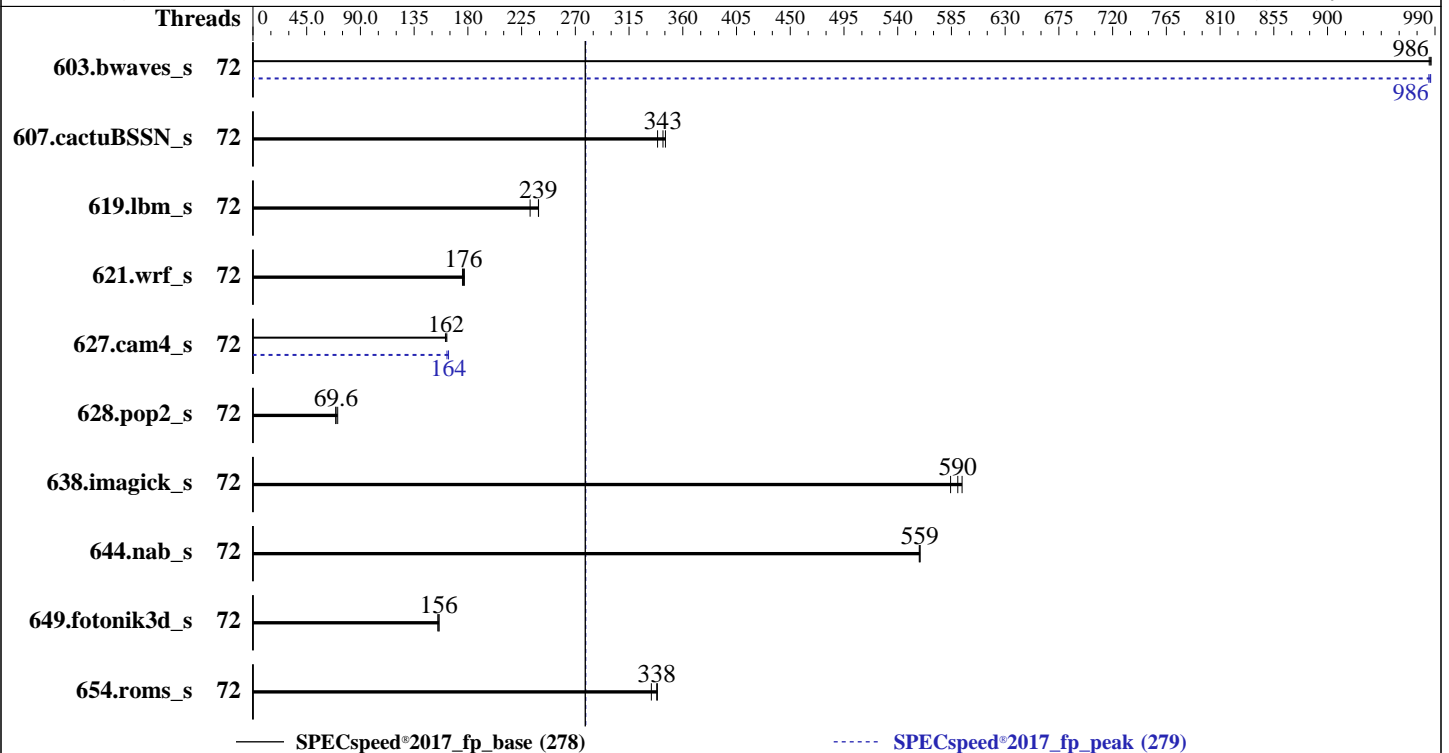

Hardware

CPU Name: Intel Xeon Platinum 8452Y
 Max MHz: 3200
 Nominal: 2000
 Enabled: 72 cores, 2 chips
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 67.5 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 Kernel 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2022.1 of Intel Fortran Compiler for Linux
 Parallel: Yes
 Firmware: HPE BIOS Version v1.22 01/18/2023 released Jan-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECSpeed®2017_fp_base = 278

SPECSpeed®2017_fp_peak = 279

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: May-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	72	59.8	986	59.8	987	59.9	985	72	59.9	985	59.8	986	59.8	986
607.cactuBSSN_s	72	49.2	339	48.5	343	48.3	345	72	49.2	339	48.5	343	48.3	345
619.lbm_s	72	21.9	239	22.6	232	21.9	239	72	21.9	239	22.6	232	21.9	239
621.wrf_s	72	75.4	175	74.7	177	75.0	176	72	75.4	175	74.7	177	75.0	176
627.cam4_s	72	54.6	162	54.8	162	55.0	161	72	54.5	163	54.1	164	54.1	164
628.pop2_s	72	167	71.0	171	69.6	171	69.3	72	167	71.0	171	69.6	171	69.3
638.imagick_s	72	24.4	590	24.7	584	24.3	594	72	24.4	590	24.7	584	24.3	594
644.nab_s	72	31.3	559	31.3	558	31.3	559	72	31.3	559	31.3	558	31.3	559
649.fotonik3d_s	72	58.5	156	58.5	156	58.9	155	72	58.5	156	58.5	156	58.9	155
654.roms_s	72	47.2	334	46.5	339	46.6	338	72	47.2	334	46.5	339	46.6	338

SPECSpeed®2017_fp_base = **278**

SPECSpeed®2017_fp_peak = **279**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECspeed®2017_fp_base = 278

SPECspeed®2017_fp_peak = 279

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b000161 for the Intel Xeon Platinum 8452Y processor.

BIOS Configuration:

Workload Profile set to General Peak Frequency Compute

Thermal Configuration set to Maximum Cooling

Intel Hyper-Threading set to Disabled

Memory Patrol Scrubbing set to Disabled

Last Level Cache (LLC) Prefetch set to Enabled

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Enhanced Processor Performance Profile set to Aggressive

Dead Block Predictor set to Enabled

Workload Profile set to Custom

Intel DMI Link Frequency set to Gen2 Speed

Adjacent Sector Prefetch set to Disabled

Minimum Processor Idle Power Package C-State set to No Package State

sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Fri Jun 24 14:31:25 2022

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECspeed®2017_fp_base = 278

SPECspeed®2017_fp_peak = 279

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

Platform Notes (Continued)

- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 250 (250-6.e19_0)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent_hugepage
- 17. /sys/kernel/mm/transparent_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
-----
1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
```

```
-----
2. w
14:31:25 up 15 min, 0 users, load average: 0.15, 0.03, 0.01
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
```

```
-----
3. Username
From environment variable $USER: root
```

```
-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 4127208
max locked memory           (kbytes, -l) 64
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority           (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECSpeed®2017_fp_base = 278

SPECSpeed®2017_fp_peak = 279

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: May-2022

Platform Notes (Continued)

max user processes (-u) 4127208
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 28
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/fpspeed.sh
runcpu --nobuild --action validate --define default-platform-flags -c
ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=72 --tune base,peak -o all --define drop_caches
fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=72 --tune base,peak --output_format all
--define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
-----
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8452Y
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 6
microcode      : 0x2b000161
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 36
siblings       : 36
2 physical ids (chips)
72 processors (hardware threads)
physical id 0: core ids 0-35
physical id 1: core ids 0-35
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
-----
```

7. lscpu

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECspeed®2017_fp_base = 278

SPECspeed®2017_fp_peak = 279

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: May-2022

Platform Notes (Continued)

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:        46 bits physical, 57 bits virtual
Byte Order:           Little Endian
CPU(s):               72
On-line CPU(s) list:  0-71
Vendor ID:            GenuineIntel
BIOS Vendor ID:      Intel(R) Corporation
Model name:           Intel(R) Xeon(R) Platinum 8452Y
BIOS Model name:     Intel(R) Xeon(R) Platinum 8452Y
CPU family:           6
Model:                143
Thread(s) per core:  1
Core(s) per socket:  36
Socket(s):            2
Stepping:             6
BogoMIPS:             4000.00

```

Flags:

```

fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
vmx flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

```

```

Virtualization:       VT-x
L1d cache:            3.4 MiB (72 instances)
L1i cache:            2.3 MiB (72 instances)
L2 cache:              144 MiB (72 instances)
L3 cache:              135 MiB (2 instances)
NUMA node(s):         2
NUMA node0 CPU(s):   0-17,36-53
NUMA node1 CPU(s):   18-35,54-71
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:   Not affected
Vulnerability Mds:    Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECspeed®2017_fp_base = 278

SPECspeed®2017_fp_peak = 279

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

Platform Notes (Continued)

Vulnerability Meltdown: Not affected
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
 Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
 Vulnerability Srbds: Not affected
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3.4M	12	Data	1	64	1	64
L1i	32K	2.3M	8	Instruction	1	64	1	64
L2	2M	144M	16	Unified	2	2048	1	64
L3	67.5M	135M	15	Unified	3	73728	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-17,36-53
node 0 size: 515764 MB
node 0 free: 514285 MB
node 1 cpus: 18-35,54-71
node 1 size: 516077 MB
node 1 free: 515262 MB
node distances:
node  0  1
  0:  10  20
  1:  20  10
```

9. /proc/meminfo

MemTotal: 1056606176 kB

10. who -r

run-level 3 Jun 24 14:16

11. Systemd service manager version: systemd 250 (250-6.e19_0)

```
Default Target Status
multi-user      running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECspeed®2017_fp_base = 278

SPECspeed®2017_fp_peak = 279

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

Platform Notes (Continued)

```

nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd
systemd-network-generator udisks2
enabled-runtime systemd-remount-fs
disabled blk-availability chrony-wait console-getty cpupower debug-shell kvm_stat
man-db-restart-cache-update nftables rdisc rhsm rhsm-facts rpmdb-rebuild serial-getty@
ssh-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECspeed®2017_fp_base = 278

SPECspeed®2017_fp_peak = 279

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

Platform Notes (Continued)

```

16. /sys/kernel/mm/transparent_hugepage
   defrag          always defer defer+madvise [madvise] never
   enabled         [always] madvise never
   hpage_pmd_size 2097152
   shmem_enabled   always within_size advise [never] deny force

```

```

17. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs 60000
   defrag                 1
   max_ptes_none          511
   max_ptes_shared        256
   max_ptes_swap          64
   pages_to_scan          4096
   scan_sleep_millisecs  10000

```

```

18. OS release
   From /etc/*-release /etc/*-version
   os-release      Red Hat Enterprise Linux 9.0 (Plow)
   redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
   system-release  Red Hat Enterprise Linux release 9.0 (Plow)

```

```

19. Disk information
   SPEC is set to: /home/cpu2017
   Filesystem      Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-home xfs   819G  136G  683G  17% /home

```

```

20. /sys/devices/virtual/dmi/id
   Vendor:      HPE
   Product:     ProLiant DL360 Gen11
   Product Family: ProLiant
   Serial:      CNX20800PZ

```

```

21. dmidecode
   Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     16x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECspeed®2017_fp_base = 278

SPECspeed®2017_fp_peak = 279

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

Platform Notes (Continued)

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.22
BIOS Date: 01/18/2023
BIOS Revision: 1.22
Firmware Revision: 1.10

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
| 644.nab_s(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
| 654.roms_s(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
| 628.pop2_s(base, peak)
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECspeed®2017_fp_base = 278

SPECspeed®2017_fp_peak = 279

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: May-2022

Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECspeed®2017_fp_base = 278

SPECspeed®2017_fp_peak = 279

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECspeed®2017_fp_base = 278

SPECspeed®2017_fp_peak = 279

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.xml>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECspeed®2017_fp_base = 278

SPECspeed®2017_fp_peak = 279

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2022-06-24 05:01:24-0400.

Report generated on 2023-04-12 12:43:53 by CPU2017 PDF formatter v6442.

Originally published on 2023-04-11.