



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL340 Gen12

(3.20 GHz, Intel Xeon 6517P)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

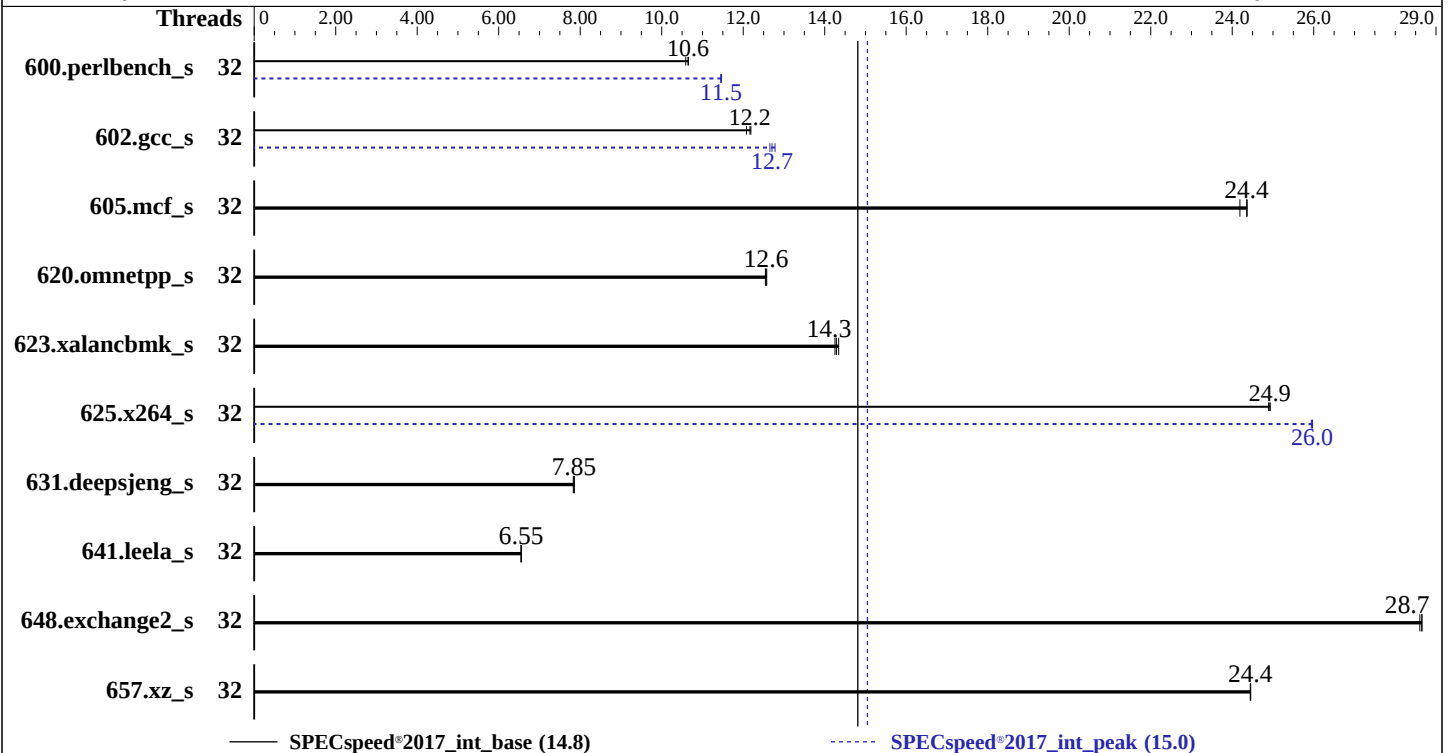

Hardware

CPU Name: Intel Xeon 6517P
Max MHz: 4200
Nominal: 3200
Enabled: 16 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 72 MB I+D on chip per chip
Other: None
Memory: 256 GB (8 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 1 x 1.2 TB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
Kernel 6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: Yes
Firmware: HPE BIOS Version v1.20 02/14/2025 released Feb-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL340 Gen12

(3.20 GHz, Intel Xeon 6517P)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	168	10.6	<u>167</u>	<u>10.6</u>	167	10.7	32	<u>155</u>	<u>11.5</u>	155	11.4	155	11.5
602.gcc_s	32	327	12.2	<u>327</u>	<u>12.2</u>	330	12.1	32	<u>313</u>	<u>12.7</u>	312	12.8	315	12.7
605.mcf_s	32	195	24.2	194	24.4	<u>194</u>	<u>24.4</u>	32	195	24.2	194	24.4	<u>194</u>	<u>24.4</u>
620.omnetpp_s	32	<u>130</u>	<u>12.6</u>	130	12.5	130	12.6	32	<u>130</u>	<u>12.6</u>	130	12.5	130	12.6
623.xalanchmk_s	32	99.4	14.3	<u>99.2</u>	<u>14.3</u>	98.8	14.3	32	99.4	14.3	<u>99.2</u>	<u>14.3</u>	98.8	14.3
625.x264_s	32	70.9	24.9	70.8	24.9	<u>70.8</u>	<u>24.9</u>	32	67.9	26.0	<u>68.0</u>	<u>26.0</u>	68.0	25.9
631.deepsjeng_s	32	182	7.85	183	7.83	<u>183</u>	<u>7.85</u>	32	182	7.85	183	7.83	<u>183</u>	<u>7.85</u>
641.leela_s	32	260	6.55	260	6.55	<u>260</u>	<u>6.55</u>	32	260	6.55	260	6.55	<u>260</u>	<u>6.55</u>
648.exchange2_s	32	103	28.7	<u>103</u>	<u>28.7</u>	103	28.6	32	103	28.7	<u>103</u>	<u>28.7</u>	103	28.6
657.xz_s	32	253	24.4	253	24.5	<u>253</u>	<u>24.4</u>	32	253	24.4	253	24.5	<u>253</u>	<u>24.4</u>

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

tuned-adm profile was set to throughput-performance using "tuned-adm profile throughput-performance"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL340 Gen12

(3.20 GHz, Intel Xeon 6517P)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes

BIOS Configuration:

Workload Profile set to General Peak Frequency Compute
Memory Patrol Scrubbing set to Disabled
Thermal Configuration set to Maximum Cooling
Enhanced Processor Performance Profile set to Aggressive
Last Level Cache (LLC) Prefetch set to Enabled
Minimum Processor Idle Power Core C-State set to C6 as ACPI C3 State
Workload Profile set to Custom
Minimum Processor Idle Power Package C-State set to No Package State

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Apr 14 01:32:27 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

```
-----
1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
-----

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
-----

2. w
01:32:27 up 12 min, 1 user, load average: 0.04, 0.01, 0.00
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1      -                01:31   11.00s 0.85s  0.00s -bash
-----

3. Username
From environment variable $USER: root
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL340 Gen12

(3.20 GHz, Intel Xeon 6517P)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 1030005
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 1030005
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=32 --tune base,peak -o all --define
intspeedaffinity --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=32 --tune base,peak --output_format all
--define intspeedaffinity --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed
intspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.010/templogs/preenv.intspeed.010.0.log
--lognum 010.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6517P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x1000380
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 16
siblings       : 32
1 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-15
physical id 0: apicids 0-31
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```
-----
7. lscpu
```

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	46 bits physical, 57 bits virtual

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL340 Gen12

(3.20 GHz, Intel Xeon 6517P)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

Byte Order:	Little Endian
CPU(s):	32
On-line CPU(s) list:	0-31
Vendor ID:	GenuineIntel
BIOS Vendor ID:	Intel(R) Corporation
Model name:	Intel(R) Xeon(R) 6517P
BIOS Model name:	Intel(R) Xeon(R) 6517P CPU @ 3.2GHz
BIOS CPU family:	179
CPU family:	6
Model:	173
Thread(s) per core:	2
Core(s) per socket:	16
Socket(s):	1
Stepping:	1
BogoMIPS:	6400.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization:	VT-x
L1d cache:	768 KiB (16 instances)
L1i cache:	1 MiB (16 instances)
L2 cache:	32 MiB (16 instances)
L3 cache:	72 MiB (1 instance)
NUMA node(s):	1
NUMA node0 CPU(s):	0-31
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL340 Gen12

(3.20 GHz, Intel Xeon 6517P)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

L1i	64K	1M	16 Instruction	1	64	1	64
L2	2M	32M	16 Unified	2	2048	1	64
L3	72M	72M	16 Unified	3	73728	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)

node 0 cpus: 0-31

node 0 size: 257526 MB

node 0 free: 256450 MB

node distances:

node 0

0: 10

9. /proc/meminfo

MemTotal: 263706756 kB

10. who -r

run-level 3 Apr 14 01:20

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled apparmor auditd cron getty@ irqbalance issue-generator kbdsettings nvme-fc-boot-connections
nvme-fc-autoconnect postfix purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny

enabled-runtime systemd-remount-fs

disabled boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell grub2-once
haveged hwloc-dump-hwdata issue-add-ssh-keys kexec-load rpmconfigcheck serial-getty@
systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysex
systemd-time-wait-sync systemd-timesyncd tuned

indirect systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default

root=UUID=eab0ed4d-682e-4710-8733-c28bac484a35

splash=silent

resume=/dev/disk/by-uuid/aeed0eb8-1155-47a5-869c-f7c223bb00af

mitigations=auto

quiet

security=apparmor

14. cpupower frequency-info

analyzing CPU 3:

Unable to determine current policy

boost state support:

Supported: yes

Active: yes

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL340 Gen12

(3.20 GHz, Intel Xeon 6517P)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

15. tuned-adm active

Current active profile: throughput-performance

16. sysctl

```
kernel.numa_balancing      0
kernel.randomize_va_space  2
vm.compaction_proactiveness 20
vm.dirty_background_bytes   0
vm.dirty_background_ratio   10
vm.dirty_bytes              0
vm.dirty_expire_centisecs   3000
vm.dirty_ratio              20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold        500
vm.min_unmapped_ratio       1
vm.nr_hugepages             0
vm.nr_hugepages_mempolicy   0
vm.nr_overcommit_hugepages  0
vm.swappiness               10
vm.watermark_boost_factor   15000
vm.watermark_scale_factor   10
vm.zone_reclaim_mode        0
```

17. /sys/kernel/mm/transparent_hugepage

```
defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000
```

19. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
```

20. Disk information

SPEC is set to: /home/cpu2017

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p3 xfs 1.2T 137G 1.1T 12% /home
```

21. /sys/devices/virtual/dmi/id

```
Vendor:      HPE
Product:     HPE ProLiant Compute DL340 Gen12
Product Family: ProLiant
Serial:      C2X2NWV69B
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL340 Gen12

(3.20 GHz, Intel Xeon 6517P)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Micron MTC20F2085S1RC64BD2 QSFF 32 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.20
BIOS Date: 02/14/2025
BIOS Revision: 1.20
Firmware Revision: 1.11

Compiler Version Notes

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 648.exchange2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL340 Gen12

(3.20 GHz, Intel Xeon 6517P)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL340 Gen12

(3.20 GHz, Intel Xeon 6517P)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w -m64 -std=c11 -Wl, -z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -w -m64 -std=c11 -Wl, -z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

605.mcf_s: basepeak = yes

```
625.x264_s: -w -std=c11 -m64 -Wl, -z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL340 Gen12

(3.20 GHz, Intel Xeon 6517P)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.2.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.2.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-04-14 01:32:26-0400.

Report generated on 2025-05-08 10:00:48 by CPU2017 PDF formatter v6716.

Originally published on 2025-05-06.